

Polymaster

Product Guide 2024



Why Choose Polymaster?

Polymaster uses top grade materials that are trialled and tested at every point during the design and manufacturing process. Our products are backed up with global quality and process certifications, manufactured in our purpose built facilities we can control the entire process from the powder we use to the end product.



Manufactured Locally

Australian owned & operated since 1994



Custom Tank Builder

Industry leading technology to put you in control of your tank building journey



Product Certification

Built to the Rainwater tank Standard AS/NZS 4766:2006 for peace of mind. Licence no. BMP657671 & BMP650824



Fittings Standard

Rainwater Tanks come standard with fittings. Ask us what fittings come with the tank model you are interested in



Quality Assurance

Polymaster only produces quality products and service, certifying us for the International Standard ISO9001 for quality management



One Piece Tank Construction

With no joins or seams, our new generation roof design eliminates the need for an internal support pole



BPA Free

For your peace of mind



Extra Thick Walls

Each Polymaster tank undergoes ultrasonic thickness testing and impact testing to ensure material is correct thickness



Food Grade

Our tanks are made from food-grade polyethylene and certified to AS/NZS4020, the Australian Standard for drinking water



Messaging Service

Know where your tank is and when to expect its delivery



UV+ Double Strength

Our exclusive UV+ double strength resin gives the best protection against Australia's harsh sun



Delivery

Large fleet, fast turn around times & free to many sites. See Delivery & Installation for full details - page 64.



Reliability

Our drivers take pride in getting our tanks exactly where you want them, when you need them



Store Locator

Looking for your nearest store? With our store locator you can find the nearest store to you.

RAINWATER TANKS

Round Rainwater Tanks	6
Slimlines Tanks & Pumps	9
Underground Water Tanks	11
Pipeline Tanks	12
Tank Accessories	13
Water Pumps	15

SEPTIC TANKS & PUMP WELLS

Septic Tanks	17
Pump Wells	18

DIESEL TANKS

Diesel Self Bunded Tanks	20
Diesel Single Skin Tanks	22
Diesel Ute Packs	23
Diesel Transfer Tanks	24
Diesel Trailer Packages	25
Dispensing Kits	26
Pumps & Accessories	27

ADBLUE® TANKS

AdBlue® Self Bunded Tanks	28
Adblue® Single Skin Storage Tanks	31
Adblue® Ute Packs & Accessories	32

FIRE FIGHTING


Water Cartage Tanks	35
Compact Packages	36
Skid Mounted Packages	37
Trailer Packages	38
Pumps & Accessories	39

AGRICULTURE & FARMING

Liquid Fertiliser Tanks	41
Fertiliser Mixing Tanks	43
Aquaculture	44
Troughs	45
Equine	51
Calving & Cattle	53
Footrot Baths	56
Lambing	57
Calf & Lamb Accessories	58
Farm Storage Equipment	59
Safety & Spill Containment	63

Tank Colours

With so many choices of Colorbond® matched hues, we've made it easy to perfectly blend your new tank with your new home or surroundings. This range takes the guesswork out of matching your tank colour with your exterior walls, guttering or roofing. No wonder this range is an Australian favourite.

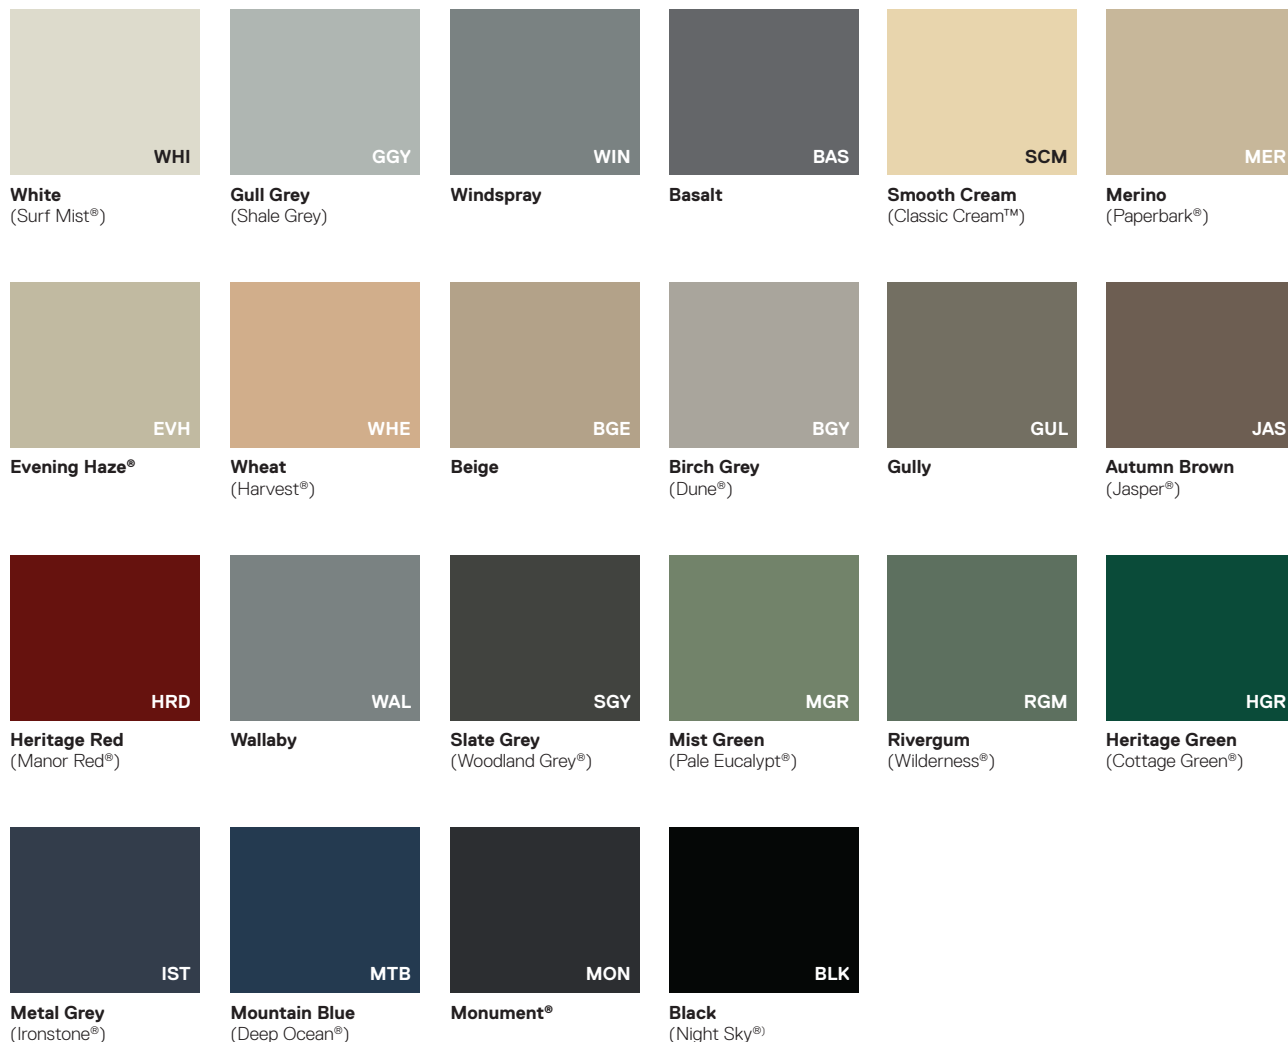

Contact us to discuss your colour project on 1800 062 064.

Please note actual colours may vary on a real product compared to a printed brochure. Check out colour swatches at your local distributor for accurate colour representation.

Colours are shown for illustrative purposes only and may vary. Polymaster will not be held liable for incorrect colour impressions. Request your Polymaster colour sample to view colours. *COLORBOND® and colour names are registered trademarks of Blue Scope Steel Ltd.™ Polymaster tank colours represented match COLORBOND® steel colours. As we process our own resin we are able to offer a vast range of custom colours, available at an additional cost.

RAINWATER TANKS



Rainwater Tanks



Premium Round Water Tanks


CODE	PROFILE	CAPACITY (Litres)	DIAMETER	OVERALL HEIGHT	INLET HEIGHT	STRAINER SIZE	OVERFLOW (Alternative)	OUTLET SIZE	UPGRADE BALL VALVE & OUTLET
RWT200	Corrugated	200	600	900	900	200 (S2)	12	25	40 - BV1.5A 50 - BV2A
RWT600	Corrugated	600	1000	950	950	200 (S2)	12	25	40 - BV1.5A 50 - BV2A
RWT1000	Corrugated	1,000	1000	1500	1500	200 (S2)	12	25	40 - BV1.5A 50 - BV2A
RWT1600	Corrugated	1,600	1250	1610	1500	300 (S3)	11/4	25	40 - BV1.5A 50 - BV2A
RWT2270T*	Corrugated	2,270	1300	2000	1920	300 (S3)	11/5	25	40 - BV1.5A 50 - BV2A
RWT2270LP*	Corrugated	2,270	1700	1310	1200	400 (S4)	11/4	25	40 - BV1.5A 50 - BV2A
RWT3300	Corrugated	3,300	1520	2100	2000	300 (S3)	11/4	25	40 - BV1.5A 50 - BV2A
RWT4500T*	Corrugated	4,500	1700	2200	2100	400 (S4)	11/4	25	40 - BV1.5A 50 - BV2A 80 - BV3A
RWT4500LP*	Corrugated	4,500	2150	1580	1380	400 (S4)	11/3/7	25	40 - BV1.5A 50 - BV2A 80 - BV3A
RWT5000	Corrugated	5,000	1950	2170	1960	400 (S4)	11/3/7	25	40 - BV1.5A 50 - BV2A 80 - BV3A
RWT7100	Corrugated	7,100	2150	2300	2120	400 (S4)	11/3/7	40	50 - BV2A 80 - BV3A
RWT9000	Corrugated	9,000	2500	2260	2050	400 (S4)	11.30/2.30/ 5.30/8.30	40	50 - BV2A 80 - BV3A
RWT13600	Corrugated	13,600	3100	2450	2100	400 (S4)	11/2/5/8	40	50 - BV2A 80 - BV3A 100 - BV4A
RWT22500	Corrugated	22,500	3560	2800	2470	400 (S4)	11.30/2.30/ 5.30/8.30	40	50 - BV2A 80 - BV3A 100 - BV4A
RWT31700	Corrugated	31,700	4100	3040	2610	400 (S4)	11.30/2.30/ 5.30/8.30	40	50 - BV2A 80 - BV3A 100 - BV4A
RWT50KL	Smooth	50,000	4600	3440	3290	500 (S5)	2/4/6/8/10/12	40	50 - BV2A 80 - BV3A 100 - BV4A

*T = Tall

*LP = Low Profile




DIMENSIONS

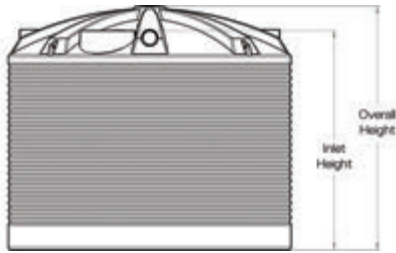


KEY FEATURES

- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Solid brass threaded outlet & ball valve as standard
- Upgraded outlet and ball valves are available at an additional cost
- Certified to AS/NZS 4766:2006 Standard
- Outlet standard position 6 o'clock
- Outlet position can be moved from standard based on positions on the Fit Out Clock
- Replacement manhole covers and strainers available
- Available in 22 Colours
- 90mm overflow as standard


Fit Out Clock



Refer to table for what overflow positions are available for each tank size.



Strainer



Overflow



Lifting Lugs



Brass outlet



Ball Valve


Rainwater Tanks



Round Water Tanks

CODE	PROFILE	CAPACITY (Litres)	DIAMETER	OVERALL HEIGHT	INLET HEIGHT	STRAINER SIZE	OVERFLOW (Alternative)	OUTLET SIZE	UPGRADE OUTLET
PCR2000	Smooth	2,000	1175	2255	2185	300 (S3)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR4000	Smooth	4,000	1600	2200	2150	400 (S4)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR5000	Smooth	5,000	1800	2200	2120	400 (S4)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR7000	Smooth	7,000	2200	2200	2020	400 (S4)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR10000	Smooth	10,000	2480	2350	2170	400 (S4)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A 100 - BV4A
PCR13500	Smooth	13,500	2830	2630	2470	400 (S4)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A 100 - BV4A
PCR22500	Smooth	22,500	3573	2879	2559	500 (S5)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A 100 - BV4A
PCR27000	Smooth	27,000	3573	3339	3019	500 (S5)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A 100 - BV4A

DIMENSIONS



Fit Out Clock



KEY FEATURES

- Outlet standard position is 6 o'clock
- Outlet position can be moved from standard based on positions on the Fit Out Clock
- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Solid brass threaded outlet and ball valve as standard
- Upgraded outlet and ball valves are available at an additional cost
- Replacement manhole covers and strainers available
- Available in 22 Colours
- Certified to AS/NZS 4766:2006 Standard

Refer to table for what overflow positions are available for each tank size.



PCR27000



PCR13500



PCR4000



Strainer



Overflow



Lifting Lugs



Brass outlet



Ball Valve

Slimline Tanks



Builders Tank & Pump Packages

CODE	PUMP CAPABILITY	CAPACITY (Litres)	PUMP CODE	LENGTH	WIDTH	HEIGHT	INLET HEIGHT	OUTLET (Position)	OUTLET SIZE
BSLT2020H4	Single Storey Dwellings	2,020	MHR20-370	2105	735	2010	2010	6&12	25
BSLT2020H5	Double Storey Dwellings	2,020	MHR20-550	2105	735	2010	2010	6&12	25

PUMP INFORMATION

Automatic hydraulic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

*Refer to Page 15 for Pump Details.

CODE DESCRIPTION

BSLT2020PC Pump Cover for **BLST2020**


MHC8 Inspection Cover 400mm

S4 Inlet Strainer 400mm

KEY FEATURES

- 10 minute quick install - pump built in, just hook it up
- Moulded handgrips for easy lifting
- 2 x 90mm overflows + 1 cap
- 2 x outlets + 1 cap
- Certified to AS/NZS 4766:2006 Standard
- Flexhose 20mm x 600mm female thread
- Hoses for connection at approximately 400mm high
- Available in 22 colours
- Fits through a standard doorway

DIMENSIONS

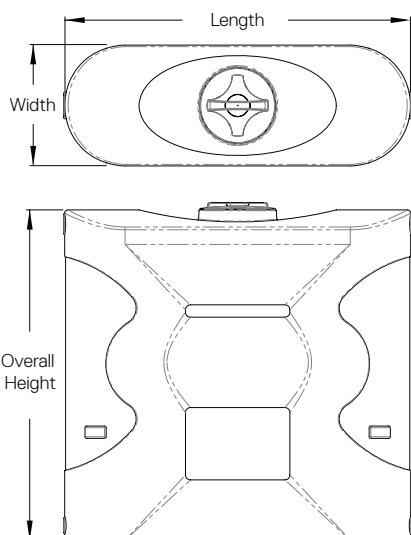


Standard Fittings



Pump pre-installed with rain/mains changeover



Flexible hoses for quick connection



Leaf & mosquito proof mesh screen



2 x Large 90mm overflows (1 each end) + 1 cap



2 x 25mm outlets (1 each end) + 1 plug



Cover to conceal pump

Slimline Tanks & Pump Options




Tank Range

TANK ONLY	TANK + HOUSEHOLD PUMP (HHR-370S-PC)	TANK + GARDEN PUMP (DHJ600)	CAPACITY	DIMENSIONS (L X W X H)
PCST600	-	-	600	1220 x 580 x 1265
PCST1050	PCST1050AP	PCST1050GPS	1050	1460 x 690 x 1515
PCST2000	PCST2000AP	PCST2000GPS	2000	2370 x 600 x 2010
PCST3000	PCST3000AP	PCST3000GPS	3000	2570 x 790 x 2050
PCST5000	PCST5000AP	PCST5000GPS	5000	3290 x 1020 x 2010

*GPS models include separate pump cover (PC01)

CAPACITY (Litres)	STRAINER (mm)	OVERFLOW POSITION	OUTLET POSITION	OUTLET SIZE	MANHOLE COVER
600	300 (S3)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC9
1050	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8
2000	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8
3000	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8
5000	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8

DIMENSIONS

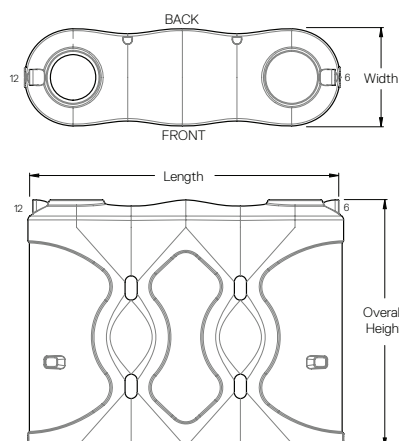

PUMP INFORMATION

Automatic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

*Refer to page 15 for Pump Details.

KEY FEATURES

- Space saving modern design
- 25mm solid brass outlet
- Moulded handgrips for easy lifting
- 90mm overflow
- Available in 22 Colours
- Certified to AS/NZS 4766:2006 Standard



Underground Tanks



CODE	DESCRIPTION	CAPACITY (Litres)	LENGTH	WIDTH	HEIGHT
URT3300B	Tank Only	3,300	2470	1640	1665
URT5000B	Tank Only	5,000	3520	1640	1665
URT3300VF	Tank with Vortex Filter	3,300	2470	1640	1665
URT5000VF	Tank with Vortex Filter	5,000	3520	1640	1665
URT3300VF/PC	Tank with Vortex Filter & submersible pump + auto changeover device	3,300	2470	1640	1665
URT5000VF/PC	Tank with Vortex Filter & submersible pump + auto changeover device	5,000	3520	1640	1665
URT3300VF/GP	Tank with Vortex Filter & garden pump + press control	3,300	2470	1640	1665
URT5000VF/GP	Tank with Vortex Filter & garden pump + press control	5,000	3520	1640	1665

Pump Details

TYPE	VOLTAGE	POWER (kW)	HEAD	FLOW	WARRANTY
Submersible Pump (PC)	220-240v	0.37kW (370 watts)	36m	82LPM	2 years
Garden Pump (GP)	220-240v	0.37kW (370 watts)	36m	82LPM	2 years


Accessories

CODE	DESCRIPTION
URRM	500mm Riser - for deeper installations
U-LID	Lid to suit Underground Tanks
LID-CD	Heavy Duty Class D Lid

KEY FEATURES

- Child-proof lid secured with tamper proof screws
- Self-anchoring
- Low profile design - minimal excavation required
- Uni Seals supplied
- Tank to tank connection point
- Certified to AS/NZS 4766:2006 Standard

DIMENSIONS

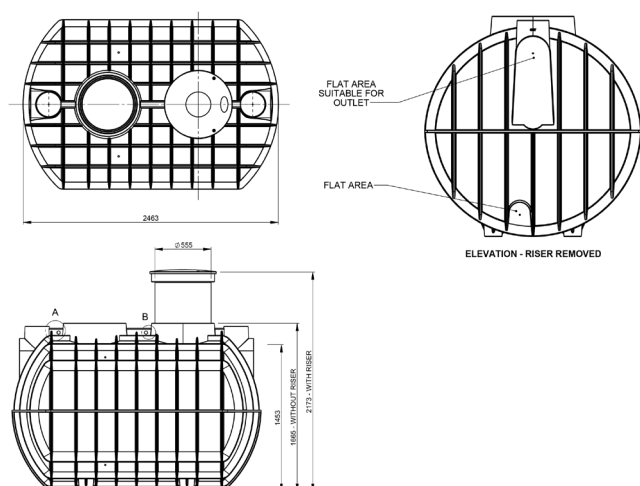

VORTEX FINE FILTER

Self cleaning filter removes sediment and debris, providing you with clean water for storage. Wall mounting bracket available.



Example Setup Underground Tank with Vortex Filter and Submersible Pump options

Pipeline Tanks



CODE	CAPACITY (Litres)	DIAMETER	INLET HEIGHT	OVERALL HEIGHT	INLET / OUTLET SIZE
PLT9000	9,000	2500	2050	2260	32+50
PLT13600	13,600	3100	2100	2450	32+50
PLT22500	22,500	3560	2470	2800	32+50
PLT31700	31,700	4100	2610	3040	32+50
PLT50KL	50,000	4600	3290	3440	32+50

KEY FEATURES


- Inspection cover
- 90mm overflow/breather & screen
- **AFV2LB** 32mm brass fitting and 25mm poly float
- 50mm outlet and ball valve

STANDARD FITTINGS AND LOCATIONS

12:00	Inspection Cover
2:30	Breather /Overflow
6:00	50mm Brass Outlet & Ball Valve
11:30	Fitting & Float Valve

*Pipeline fittings available page 14

DIMENSIONS

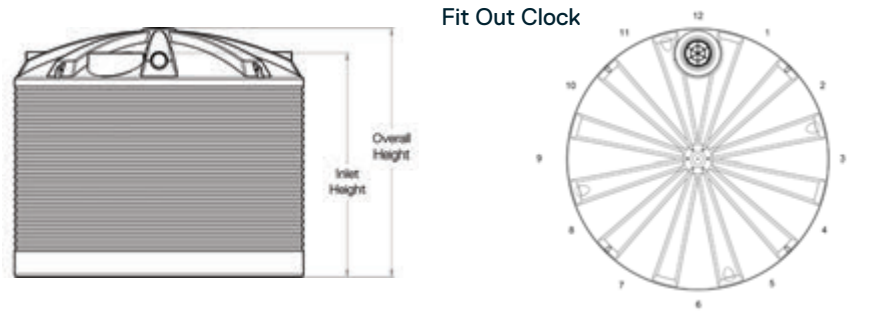

*Pipework not included



Optional internal pipeworkfit out available

Accessories

Inspection Covers

CODE	DESCRIPTION
MHC1	Inspection Cover for 13,600ltr to 31,700ltr RWT Tanks
MHC3	Water Entry Cover for Tanks with 400mm Sieve
MHC4	Inspection Cover for Tanks with 400mm Sieve
MHC5	Inspection Cover for RWT3300 , RWT2270T and RWT1600 Tanks
MHC6	Inspection Cover for RWT1000 , RWT600 and RWT200 Tanks
MHC8	Inspection Cover for Slimline Tanks 1,050ltr, 2,000ltr, 3,000ltr and 5,000ltr
MHC9	Inspection Cover for 600ltr Slimline Tank
MHCA	Inspection for 13,500ltr to 27,000ltr PCR Tanks + RWT50KL

Water Level Indicators

CODE	DESCRIPTION
CLG	Clock Level Gauge
DPK1	Dipstick
DPK1EXT	Dipstick Extension For 50KI Tank
LT01	Levelator - Water Level Indicator
LQ01	Liquidator - Level Indicator Suitable For Corrosive Liquids

Other Rainwater Accessories

CODE	DESCRIPTION
LGSO	Leaf Guard - Swivel Outlet
LWD	Downpipe Water Diverter
OFF9	90mm Overflow Flanged
OFF	Plug To Fit 90mm Overflow
OS9	90mm Overflow Screen
OFF10	100mm Overflow Flanged
PC01	Pump Cover 700L x 450W x 560H mm

Underground Tank Accessories


CODE	DESCRIPTION
JOS90	90mm Ozzie Seal For Overflow
URRM	500mm Riser - For Deeper Installations
U-LID	Lid To Suit Underground Tanks
R10112	Uniseal 100mm

Vortex Self-Cleaning Fine Filters

CODE	DESCRIPTION
URVF01	Vortex Filter Suitable For Roof Areas Up To 200Sq Metres
URVF15	Vortex Filter Suitable For Roof Areas Up To 500Sq Metres
URVF30	Vortex Filter Suitable For Roof Areas Up To 3000Sq Metres
URVFR	Riser Only - For Vortex Self Cleaning Filter
URVFWM	Vortex Filter Wall Mount

Tank Inlet Filter

CODE	DESCRIPTION
TIF3	Tank Inlet Filter 300mm including Sieve
TIF4	Tank Inlet Filter 400mm including Sieve



Accessories

Sieves / Inlet Strainers

CODE	DESCRIPTION
S2	Sieve 200mm
S3	Sieve 300mm
S4	Sieve 400mm
S5	Sieve 500mm




Rural Fire Tank Fittings

CODE	DESCRIPTION
CFA1	65mm CFA Coupling Only (VIC)
CFA2	65mm CFA Coupling complete with 50mm (2") Outlet & Ball Valve
CFAC	Cap to suit CFA1
CFS1	65mm CFS Coupling Only (SA)
CFS2	65mm CFS Coupling (SA) Complete with 50mm (2") Outlet & Ball Valve
RFS	Rural Fire Service Fitting (NSW)
RFS2	RFS Coupling Complete (VIC Metro, NSW Rural)



Fittings for Pipeline Tanks

CODE	DESCRIPTION
AFV2L-A	25mm (1") plastic Sleeve Valve - Long Arm
AFV2LB	25mm (1") including 1.25" M & F Brass Outlet Plastic Sleeve Valve - Long Arm
IRS32	Internal raised Suction 32mm - suit 40mm outlet
IRS40	Internal raised Suction 40mm - suit 50mm outlet
PLTIP25	Pipeline Tank Internal Pipework 25mm
PLTIP40	Pipeline Tank Internal Pipework 40mm
PT2132	32mm (1 1/4") Dual Level reservoir valve
PT2140	40mm (1 1/2") Dual Level reservoir valve
PT2150	50mm (2") Dual Level reservoir valve
WFV1	25mm (1") Watermark approved Float Valve
WFV2	32mm (1 1/4") Watermark approved Float Valve
WFV3	40mm (1 1/2") Watermark approved Float Valve

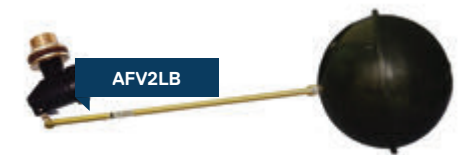

Brass Outlets

CODE	DESCRIPTION
LHO1	25mm (1") M+F
LHO1.25	32mm (1.25") M+F
LHO1.5	40mm (1.5") M+F
LHO2	50mm (2") M+F
LHO2.5	(2.5") 62mm M+F
LHO3	(3") 80mm M
LHO4	(4") 100mm M

Brass Ball Valves

CODE	DESCRIPTION
BV1	25mm (1")
BV1.5	40mm (1.5")
BV2	50mm (2")
BV3	80mm (3")
BV4	100mm (4")

Stainless Steel Outlets

CODE	DESCRIPTION
LHO1SS	25mm (1") M+F SS
LHO1.25SS	32mm (1.25") M+F SS
LHO1.5SS	40mm (1.5") M+F SS
LHO2SS	50mm (2") M+F SS
LHO3SS	80mm (3") M SS

Stainless Steel Ball Valves

CODE	DESCRIPTION
SSBV1	25mm (1") SS
SSBV1.25	32mm (1.25") SS
SSBV1.5	40mm (1.5") SS
SSBV2	50mm (2") SS
SSBV3	80mm (3") SS
SSBV4	100mm (4") SS



Water Pumps

Household Pumps with Brass Rain/Mains Changeover Device

CODE	DESCRIPTION	WATTAGE	MAX FLOW (LPM)	POWER (kW)	INLET	OUTLET	WARRANTY
MHR20-370	Single Story Pump	370W	55	0.37	25mm BSPF	20mm BSPF	3 years
MHR20-550	Double Story Pump	550W	70	0.55	25mm BSPF	20mm BSPF	3 years

Submersible Pumps

CODE	DESCRIPTION	WATTAGE	MAX FLOW (LPM)	POWER (kW)	CABLE LENGTH	OUTLET	WARRANTY
HHR-370S-PC	Pump & Press Control	370W	82	0.37	5m	20mm BSPM	2 years
HHR-370S-PC+CO	Pump w/ Press Control & Changeover Device	370W	82	0.37	5m	32mm BSPF	2 years

Garden Pumps with Press Control

CODE	DESCRIPTION	WATTAGE	MAX FLOW (LPM)	POWER (kW)	INLET	OUTLET	WARRANTY
DHJ600	Pump & Press Control	600W	45	0.6	25mm BSPF	25mm BSPM	2 years
DHJ800	Pump & Press Control	800W	55	0.8	25mm BSPF	25mm BSPM	2 years
HSJ1000	Pump & Press Control	1000W	85	1	25mm BSPF	25mm BSPM	3 years

Pump Packages - Pump + Pump Cover

CODE	DESCRIPTION	WATTAGE	MAX FLOW (LPM)	POWER (kW)	INLET	OUTLET	WARRANTY
PHGPS	Garden Pump with Press Control & Pump Cover	600W	45	0.6	25mm BSPF	25mm BSPM	2 years
PH400	Household Pump With Brass Change-over Device & Pump Cover	370W	55	0.37	25mm BSPF	20mm BSPF	3 years
PH550	Household Pump With Brass Change-over Device & Pump Cover	550W	70	0.55	25mm BSPF	20mm BSPF	3 years

*Dimensions are approximate



SEPTIC TANKS & PUMP WELLS



Septic Tanks





CODE	CAPACITY (Litres)	WEIGHT (KG)	LENGTH	WIDTH	HEIGHT	INLET SIZE	OUTLET SIZE	NO. OF PERSONS
ST3100	3,100	200	2470	1640	1700	100	100	1-5 people
ST4550	4,550	325	3520	1640	1700	100	100	6-10 people


Accessories

CODE	DESCRIPTION	KEY FEATURES
U-LID	Lid to suit Septic Tank	- Self anchoring - does not require concrete - Fittings and baffle pre-installed - Certified for NSW, VIC, SA, QLD, NT 10 minute hook up - Low profile design - minimal excavation required - One piece construction 100mm inlet and outlet pre-installed - Heavy duty lid tested to 500kg loading 500mm riser extension available - Certified to AS/NZS 1546.1:2008 Standard
URRM	500mm Riser - for deeper installations	
LID-CD	Heavy Duty Class D Lid	

DIMENSIONS

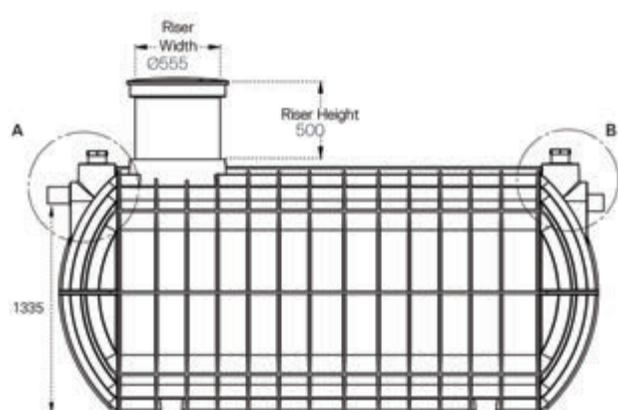

DETAIL A
(INLET)




DETAIL B
(OUTLET)



ST3100



ST4550



Class D Lid
Available



Fittings & Baffle
Pre-Assembled



Heavy Duty Lid



Optional Riser
Available



SCAN TO
LEARN MORE

Pump Wells




CAPACITY (Litres)	TANK W/ ROUND LID	DIMENSIONS (mm)	TANK W/ SQUARE LID	DIMENSIONS (MM)
700	PW700-RND	1090 DIA x 1313H	PW700-SQR	1090 DIA x 1255H
1,000	PW1000-RND	1090 DIA x 1703H	PW1000-SQR	1090 DIA x 1645H
1,300	PW1300-RND	1090 DIA x 2093H	PW1300-SQR	1090 DIA x 2035H

Accessories

CODE	DESCRIPTION	KEY FEATURES	
U-LID	Lid to suit Pump Well	- Round / Square lids available - Optional riser available - Class D (heavy duty lid available) - Lifting Points - Variable Inlet / Outlet heights - Tough rotationally moulded polyethylene vessel	- Designed & Certified to AS/NZS 1546.1:2008 Standard - Flat base, perfect for pump to sit on - One piece construction - Rubber ring seal fitting provided for pipe connection.
URRM	500mm Riser – for deeper installations		
LID-CD	Heavy Duty Class D Lid		

Round / Square lids available

- Optional riser
- Class D (heavy duty) lid available

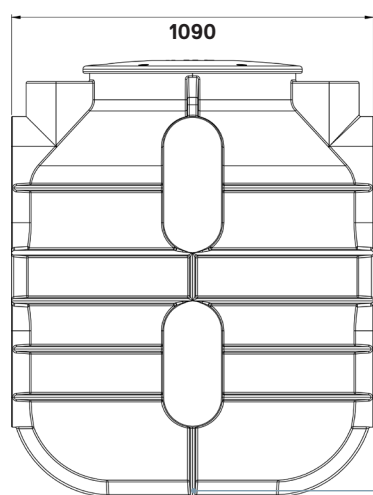

PW700-RND



PW700-RND


Lifting Points

Variable Inlet /
Outlet heights

Tough rotationally moulded
polyethylene vessel

Designed & Certified to AS/NZS
1546.1:2008 Standard

Flat base,
perfect for pump to sit on



Class D Lid
Available



Square Lids
Available




Optional 500mm
Riser Available

DIESEL TANKS




Self Bunded Tanks

Three models available: Essential, Ranger or Quantum

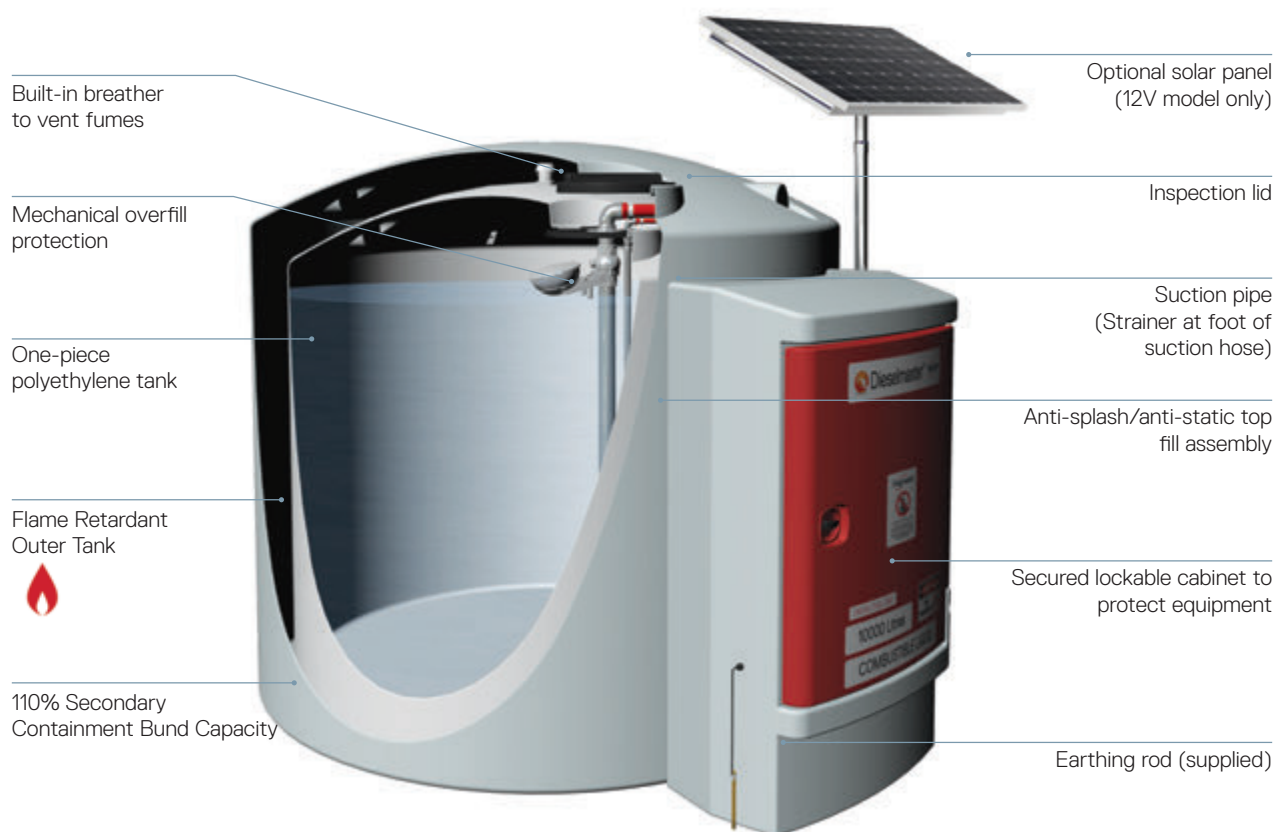

Cabinet Details (Essential Model Shown)

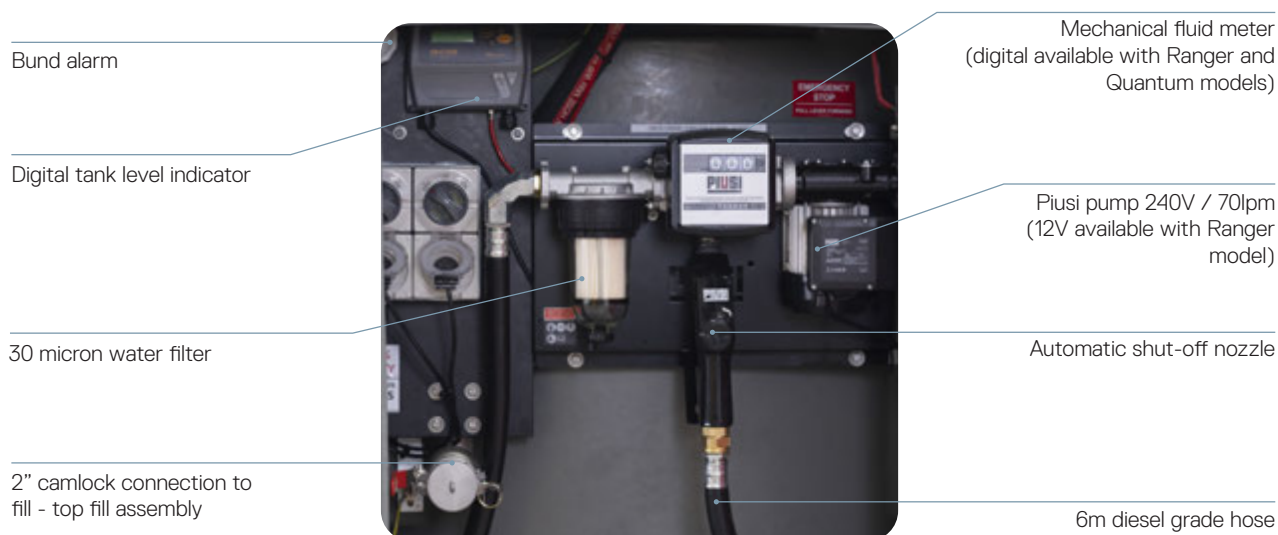


Bunded Tanks Comparison Chart

FEATURES	* ESSENTIAL	RANGER	QUANTUM
Power supply - 240V	✓	✓	✓
Power supply - 12V	–	✓	–
70LPM Piusi pump	✓	✓	✓
6mtr dispensing hose with auto-shut off trigger nozzle	✓	✓	–
10mtr hose reel with auto-shutoff trigger nozzle	–	–	✓
Auto-shutoff nozzle holster	–	✓	✓
30 micron clear water capture filter - to 150LPM	✓	✓	✓
2" camlock connection to fill - top fill assembly	✓	✓	✓
Anti-splash/anti-static top fill assembly	✓	✓	✓
Mechanical overfill protection	✓	✓	✓
High/Low level electronic audible alarm	–	✓	✓
Bund alarm	✓	✓	✓
110% secondary containment bund capacity	✓	✓	✓
Flame retardant outer tank material	✓	✓	✓
Digital level indicator	✓	✓	✓
Secured lockable cabinet to protect equipment	✓	✓	✓
Mechanical fluid meter to measure vehicle usage	✓	–	–
Digital fluid meter to measure vehicle usage	–	✓	✓
Power control box with auto time out (10mins) & emergency stop	–	✓	✓
Fuel management system for up to 120 users	–	–	✓

Specifications

CODE	CAPACITY (Litres)	A	B	C	D
DMDS5000	5,000	2200	2080	2260	2750
DMDS7000	7,000	2500	2190	2350	3070
DMDS10000	10,000	2500	2520	2710	3062
*DMDS10000E	Only available in 10,000ltrs				

DIMENSIONS

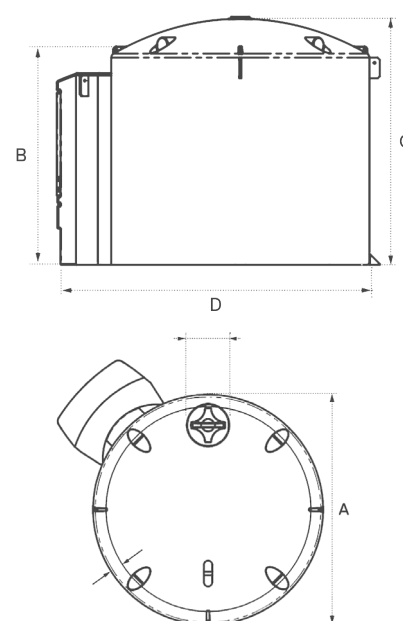

Single Skin Tanks




CAPACITY (Litres)	TANK ONLY	TANK + DISPENSER 240V	TANK + DISPENSER 12V
5,000	DSW5000	DSW5000+DK-240V	DSW5000+DK-12V
7,000	DSW7000	DSW7000+DK-240V	DSW7000+DK-12V
10,000	DSW10000	DSW10000+DK-240V	DSW10000+DK-12V

KEY FEATURES

- High Quality Diesel Grade Material
- UV Resistant for Australian Conditions
- Plug & Play Installation, Easy to Relocate
- Clock Type Level Gauge
- Galvanised Pipework
- 2" Aluminium Camlock
- 2" Brass Outlet with Lockable Ball Valve
- Earthing Rod
- Breather Vent
- Mechanical Overfill Protection
- Australian Made Tank

KEY FEATURES (TANK & DISPENSER)

- Complies to Australian Standards AS1940:2017 with Approved Bund
- Quality Italian Pumps Available in 240V & 12V
- Lockable Pump
- 70LPM Pump (56LPM on 12V Unit)
- Water Captor Filter
- 6m Diesel Hose (4m on 12V unit)
- Auto Shutoff Nozzle
- Mechanical Fluid Meter

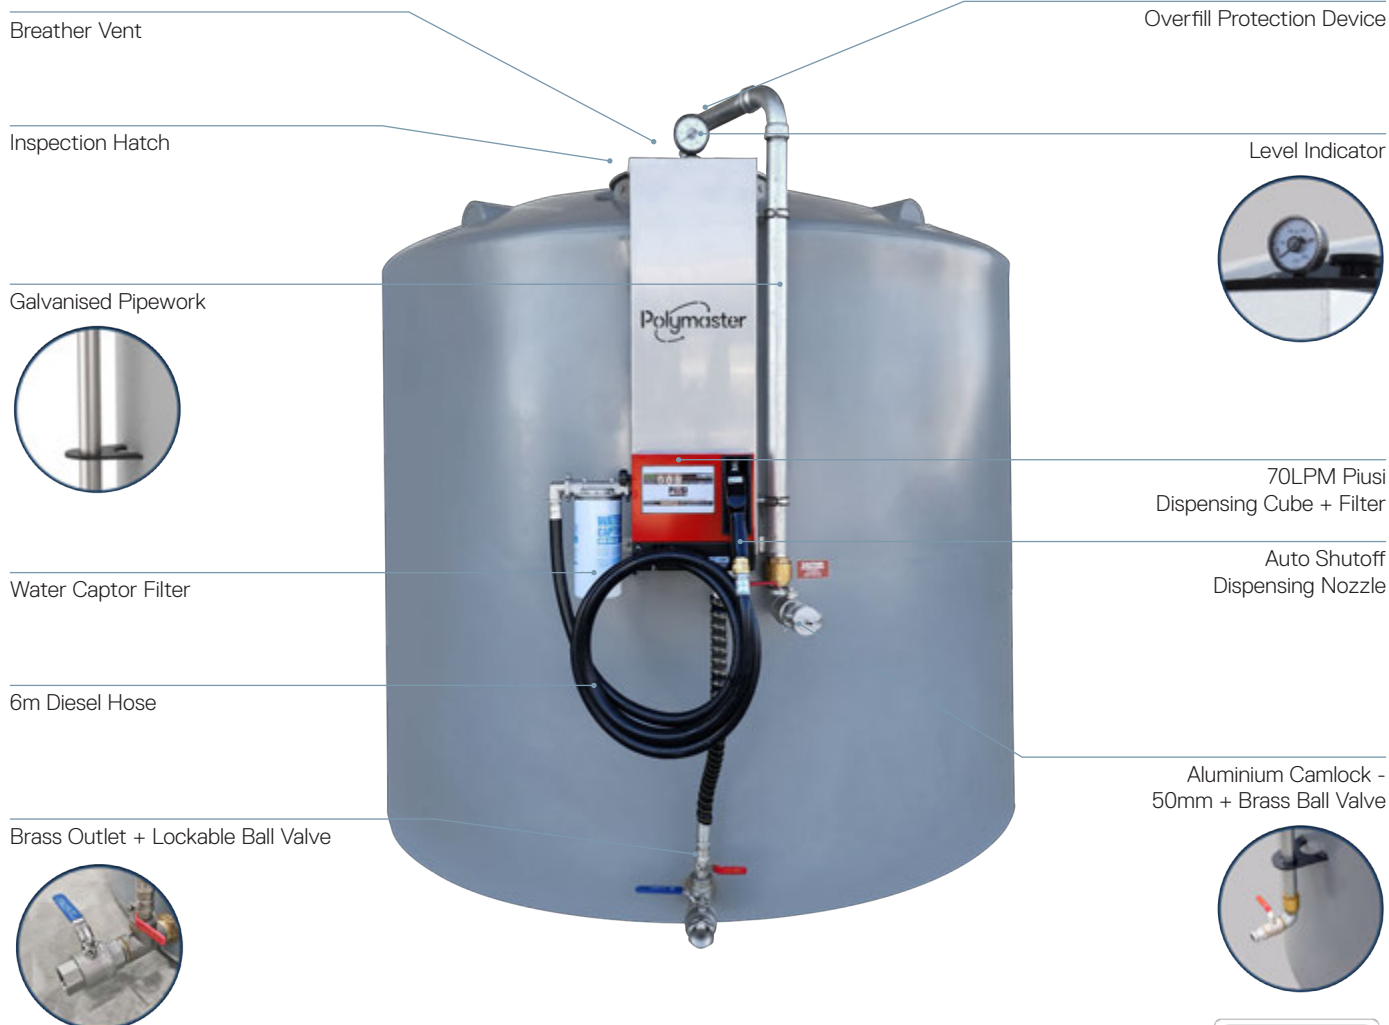

Ute Packs



CODE	CAPACITY (ltrs)	DIMENSIONS (L x W x H)	PUMP*	PUMP FLOW (LPM)	HOSE LENGTH (m)	AUTO TRIGGER NOZZLE	MOUNTING FRAMES
DMP100E	100	770 x 540 x 500	DP50PUMP	50	4	Yes	DM100MF
DMP200E	200	1000 x 750 x 605	DP50PUMP	50	4	Yes	DM200MF
DMP400E	400	1620 x 750 x 665	DP50PUMP	50	4	Yes	DM400MF
DMPQ400E	400	930 x 1200 x 685	DP50PUMP	50	4	Yes	-
DMPQB400E (Bunded)	400	1130 x 1380 x 832	DP50PUMP	50	4	Yes	-
DMP600E	600	1720 x 890 x 755	DP50PUMP	50	4	Yes	DM600MF
DMP800E	800	1720 x 890 x 925	DP50PUMP	50	4	Yes	DM800MF

*Refer to Diesel Pump page for full pump details on page 26

KEY FEATURES

- High quality Piusi Italian pump
- Lockable lid
- UV protected
- Earth strap
- 4m Diesel hose
- In-line mesh filter
- Pump isolation switch
- Auto shutoff nozzle with swivel
- 4m pump cable + alligator clips
- Vented fill cap

OPTIONAL EXTRAS

- Gas Struts - Only available on cube ute packs
- Fuel Gauge
- Digital fluid meter
- Bund available - cube ute packs
- Mounting frames available



Pump



Nozzle



Vented Filler Cap + Inline Filter



Alligator Clips



Lockable Lid



Base Wear Pads

Transfer Tanks



CAPACITY (ltrs)	TANK ONLY	TANK + 12V PUMP	TANK + FASTFLOW 12V PUMP	TANK + DUAL 24/12V PUMP	TANK + 240V PUMP	DIMENSIONS (L x W x H)
1200	DM1200-S	DMP1200-S	DMPF1200-S	DMPD1200-S	DMP1200-S-240V	1500 x 1190 x 920
2000	DM2000-S	DMP2000-S	DMPF2000-S	DMPD2000-S	DMP2000-S-240V	2280 x 1280 x 990
3000	DM3000-S	DMP3000-S	DMPF3000-S	DMPD3000-S	DMP3000-S-240V	2280 x 1540 x 1220

Pump Options

PUMP CODE	PUMP TYPE	VOLTAGE	POWER (kW)	FLOW (LPM)
DP50PUMP12-ASY	12V	12	0.3	50
DP85PUMP	FASTFLOW 12V	12	0.5	85
DP1224PUMP	DUAL 24/12V	24/12	0.42/0.15	70/35
DP72PUMP	240V	240	240	75

KEY FEATURES

- High quality Piusi Italian pumps
 - Pin mounting feet to secure to trailer or flat bed
 - 4m Diesel hose
 - Site tube with ball valve
 - Auto shutoff nozzle with swivel
 - 4m pump cable + alligator clips
 - Vented fill cap
 - Earth Strap
 - Pump isolation switch
 - UV protected
- *Refer to Diesel Pump page for full pump details on page 26



Breather



Site Tube



Pump



Nozzle



Alligator Clips



Pin Mounts

Trailer Packages



CODE	CAPACITY (ltrs)	TANK DIMENSIONS (L x W x H)	TRAILER DIMENSIONS (L x W x H)	PUMP*	PUMP FLOW LPM	HOSE LENGTH (m)	AUTO TRIGGER NOZZLE
DMPFT1200-S	1200	1450 x 1200 x 1000	3940 x 1770 x 1500	DP85PUMP	85	6	Yes
DMPFT2000-S	2000	1900 x 1450 x 1200	4460 x 1970 x 1650	DP85PUMP	85	6	Yes

KEY FEATURES - TRAILER

- Hot dip galvanised dual axle trailer
- 5 Stud Wheel Pattern
- Electric brakes - 2000ltr
- Hydraulic brakes - 1200ltr
- Road pack including brakes and LED lights
- Emergency breakaway protection
- Compliance plate - road registrable

KEY FEATURES - TANK AND PUMP

- 85LPM 12V Diesel pump with by-pass valve and integrated on/off switch
- Auto shutoff nozzle with 6m hose
- 4m pump cable + alligator clips
- Breather vent
- Trailer mounted toolbox to protect the hose, pump and nozzle
- 10m retractable hose reel (optional extra)

*Refer to Diesel Pump page for full pump details



Mechanical fluid meter

Diesel pump - with by-pass valve & integrated on/off switch voltage - 12v
flow rate - 85 l/min
duty cycle - 30mins

Auto shutoff nozzle with 6m hose as standard

Breather vent

Certified diesel grade polyethylene tank

Hydraulic braking system
(DMPFT1200-S)

50mm coupling

DMPFT1200-S

Hot-dip galvanised trailer rated for gross weight
1200l - 2 Tones
2000l - 2.8 Tones

Dual axle heavy duty suspension with 14" rims and tyres

Heavy duty jockey wheel

Trailer safety chain

Dispensing Kits

CODE	FLOW RATE (LPM)	VOLTAGE	HOSE LENGTH (m)	HOSE DIAMETER	OUTLET (BSP)
STMETER240V	70	240v	4	20	25
DP72KA	70	240v	6	20	25
STBOXBASIC	70	240v	6	25	25
CUBE56-12V	56	12v	4	25	25
CUBE70-240V	70	240v	6	25	25

KEY FEATURES

- Mechanical Digit Meters
- Auto shutoff nozzles
- 12V and 240V Options available
- High quality Piusi Italian pumps
- Lockable (STBOX & CUBE Models)
- Steel backing board (pre-assembled)



Pumps & Accessories

Diesel Pumps

CODE	DESCRIPTION	VOLTAGE	POWER (kW)	FLOW (LPM)	INLET	OUTLET	WARRANTY (yrs)	KIT
DP50PUMP12V-ASY	50Lpm	12v	0.3	50	25mm	25mm	1	DP50K
DP72PUMP	72Lpm	240v	0.5	72	25mm	25mm	1	DP72K
DP85PUMP	85Lpm Fast Flow	12v	0.5	85	25mm	25mm	1	DP85K
DP1224PUMP	70/35Lpm Dual Voltage	12v/24v	0.42/0.15	70/35	25mm	25mm	1	DP1224K

Pump Kits

CODE	DESCRIPTION
DP50K	Pump, 4m Hose & Auto Shutoff Nozzle
DP85K	Pump, 4m Hose, Auto Shutoff Nozzle
DP1224K	Pump, 4m Hose, Auto Shutoff Nozzle



Meters & Gauges

CODE	DESCRIPTION
CLG-D	Diesel Clock Level Gauge
DMDT	Digital Turbine Meter
DMDT-UTE	Diesel Digital Turbine Meter Kit - Suits all Ute Packs
DMM4	4 Digit Mechanical Meter
DPM	Diesel Pulse Meter
DFG100	Diesel Fuel Gauge - Suits DMP100E
DFG200	Diesel Fuel Gauge - Suits DMP200E
DFG400	Diesel Fuel Gauge - Suits DMP400E
DFG600	Diesel Fuel Gauge - Suits DMP600E + DMPQ400E
DFG800	Diesel Fuel Gauge - Suits DMP800E



Accessories

Filters

CODE	DESCRIPTION
DCF-150-A	Water Captor Filter 150lpm (Metal)- Full Assembly
DCF-150-CART	Water Captor Filter 150lpm (Metal)- Cartridge Only
DCF-100-A	Water Captor Filter 100lpm (Clear)-Full Assembly-2xCartridges
DCF-100-CART	Water Captor Filter 100lpm (Clear)- Cartridge Only
DCF-70-A	Water Captor Filter 70lpm (Metal)- Full Assembly-2xCartridges
DCF-70-CART	Water Captor Filter 70lpm (Metal)- Cartridge Only



DCF-150-A

Cube Ute Pack Accessories

CODE	DESCRIPTION
BM35TNB-RES	35L AdBlue Reservoir Tank for Cube
DM400QBUND	Diesel 400Ltr Cube Outer Bund
STRUT430MM-200N	Gas Strut 430MM L 200N- Suits Cube Range



CLG-D

Accessories

CODE	DESCRIPTION
ATN65	65LPM Diesel Auto Nozzle
ATN90	90LPM Diesel Auto Nozzle
BMCB-D	Diesel MC Box
BSFMS	Piusi MC Box B.Smart
D-CONNECT2KIT	Diesel Connection Hose to Kits
DH2020-4M	4m Diesel hose - 20 x 20 Male connectors
DH2020-6M	6m Diesel hose - 20 x 20 Male connectors
DH2025-4M	4m Diesel hose - 20 x 25 Male connectors
DH2025-6M	6m Diesel hose - 20 x 25 Male connectors
DHR10M25	10m Diesel Retractable Hose Reel
DMFC	Diesel Filling Cap - Metal
FCV	Diesel Vented Filling Cap - Plastic - Suits DMP Range
MCBKEYS	MC Box User Keys (Pk 10)
MCBKEYS-RED	MC Box User Keys - Red Manager
MCBPCIF	MC Box PC Software & USB Convert
MCBSW	MC Box Software
SPK	Solar Panel Kit



BMCB-D



DHR10M25



ATN90

ADBLUE® TANKS



Bunded Tanks

Three models available: DEPOT, TERMINAL, SUBMERSIBLE PUMP RANGE



Cabinet Details

Depot Range



Terminal Range Standard Features



8m Hose Reel



MC Box
(User management system)



Digital Tank Level Indicator
(All models)




Submersible Pump
(Options Available)

Bunded Tanks Comparison Chart

FEATURES	DEPOT	TERMINAL	SUBMERSIBLE
Australian made	✓	✓	✓
110% Bund capacity	✓	✓	✓
Bund alarm	✓	✓	✓
Digital tank volume measurement	✓	✓	✓
50mm (2") Stainless Steel Drybreak (fill)	✓	✓	✓
Mechanical Overfill protection	✓	✓	✓
High/Low level audible alarms	✓	✓	✓
Power control panel with emergency stop	✓	✓	✓
Earth rod	✓	✓	✓
Auto timeout - 10mins	✓	✓	✓
Lockable cabinet	✓	✓	✓
Digital delivery meter	✓	✓	-
120 User Piusi fuel management system	-	✓	-
5mtr delivery hose	✓	-	-
8mtr retractable delivery hose reel	Optional	✓	-
Auto shut off nozzle and holster	✓	✓	-
25mm Discharge line terminated in the cabinet	-	-	✓
Warranty	5yr on Tank	5yr on Tank	5yr on Tank
240V - 35LP Piusi AdBlue® Pump	Standard	Standard	-
12V - 35LPM Piusi AdBlue® Pump	Optional	-	-
240V - Calpeda Submersible AdBlue® Pump	-	-	Standard
240V - Franklin Submersible AdBlue® Pump	-	-	Optional
Globe valve to regulate flow rate	-	-	✓
ATG Probe Tube	Optional	Optional	Optional
Tank lifting Lugs	Optional	Optional	Optional

Specifications

AdBlue® Self Bunded Tanks

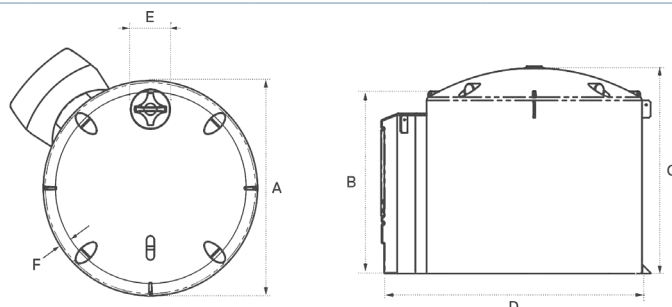

CODE	CAPACITY (LTRS)	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	F (MM)
BMDS2300	2300	1600	2160	2200	2120	490	150
BMDS3300	3300	1800	2130	2200	2300	490	130
BMDS5000	5000	2200	2080	2260	2750	490	120
BMDS7000	7000	2500	2190	2350	3070	500	170
BMDS10000	10,000	2500	2520	2710	3062	500	40

Single Skin Storage Tanks



Round Tanks

CODE	CAPACITY (Litres)	DIMENSIONS (MM)
BMS2000RPB	2,000	1175 Dia x 2355H
BMS4000RPB	4,000	1600 Dia x 2300H
BMS5000RPB	5,000	1800 Dia x 2300H
BMS7000RPB	7,000	2200 Dia x 2300H
BMS10000RPB	10,000	2480 Dia x 2450H



BMS5000RPB

KEY FEATURES

- External Liquid Level Indicator
- SS Pipework
- 2" SS Dry Break
- 2" Outlet and Ball Valve
- Earthing Rod
- Breather Vents
- Screw Lid - Inspection Hatch

Slimline Tanks

CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)
BMSL2000RPB	2,000	2590 x 750 x 2110
BMSL3000RPB	3,000	2870 x 940 x 2150
BMSL5000RPB	5,000	3590 x 1170 x 2110




BMSL5000RPB



AdBlue® Level Gauge



SS Pipework &
2" SS Dry Break



2" Outlet and Ball Valve

Single Skin Slimline Tank + Cabinet

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	PUMP	PUMP FLOW (LPM)	HOSE LENGTH (m)
BMSL5000LGY-C	Slimline AdBlue® Tank + Cabinet	5,000	4140 x 1170 x 2110	B240VP-P	35	5

KEY FEATURES

- Optimised Fleet Solutions for AdBlue® storage and dispensing to SCR/DEF equipped vehicles.
- Slimline Submersible Pump Available in Calpeda or Franklin options
- Simplifies dispensing operation
- Plug 'n' play set up for fast installation



BMSL5000LGY-C

Ute Packs & Accessories



Portable Ute Packs

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	PUMP	PUMP FLOW (LPM)	HOSE LENGTH (m)	MOUNTING FRAMES
BM100-B	Tank + 12 Volt Pump	100	770 x 540 x 500	B12V-COMET	17	4	DM100MF
BM200B-P12	Tank + 12 Volt Pump	200	1000 x 750 x 605	B12VP-P	35	4	DM200MF
BM400B-P12	Tank + 12 Volt Pump	400	1620 x 750 x 665	B12VP-P	35	4	DM400MF



Accessories

CODE	DESCRIPTION
B12KP-P	IBC Kit - 12V
BATN-P	AdBlue® Auto Shutoff Nozzle (Piusi)
BDM-P	AdBlue® Pluse Meter
BMCB-A	AdBlue® McBox
BMHR8-P	AdBlue® Hose Reel Retractable 20mm x 8m
BMLI	Level Indicator (Ocio) AdBlue®
BMTN-P	Nozzle Manual AdBlue® - Plastic Piusi



FIRE-FIGHTING/ WATER CARTAGE



SCAN TO
LEARN MORE

Water Cartage Tanks



Ute Packs

CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)	OUTLET
FTR200	200	1050 x 750 x 600	25mm
FTR400	400	1680 x 750 x 600	25mm
FTR600U	600	1720 x 890 x 755	25mm
FTR800U	800	1720 x 890 x 925	25mm



Water Cartage Tanks

CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)	OUTLET
FTR600-S	600	1200 x 1120 x 710	40mm
FTR800-S	800	1500 x 1190 x 710	40mm
FTR1200-S	1200	1500 x 1190 x 975	40mm
FTR2000-S	2000	2280 x 1280 x 1040	40mm
FTR3000-S	3000	2280 x 1540 x 1270	40mm



KEY FEATURES

UTE PACK

- Moulded internal baffles for vehicle stability
- Brass outlet
- Tough and durable one-piece moulding
- 140mm vented lid
- High strength, lightweight polyethylene construction
- Provision for strap
- Wear pads to allow airflow underneath and protect ute tray

WATER CARTAGE

- Brass outlet
- Forklift galvanised skids available
- Tough and durable one-piece moulding
- 400mm 1/4 turn hinged lid
- Sits directly on any flat surface
- High strength, lightweight polyethylene construction
- Provision for strap or pin mounting



Brass Threaded Outlet



Quarter Turn Hinged Lid (Water Cartage)



140mm Vented Lid (Ute Pack)

Compact Packages



CODE	CAPACITY (Litre)	POWER (HP)	DIMENSIONS (TANK) (L x W x H)	PUMP CODE	ENGINE/PUMP	STARTER
FTRC200-25	200	2.5	1050 X 750 X 600	MB25L	Loncin/Onga	Pull Petrol
FTRC200-55	200	5.5	1050 X 750 X 970	B55H	Honda/Onga	Pull Petrol
FTRC400-25	400	2.5	1680 X 750 X 600	MB25L	Loncin/Onga	Pull Petrol
FTRC400-55	400	5.5	1680 X 750 X 970	B55H	Honda/Onga	Pull Petrol
FTRC400-55-HR*	400	5.5	1680 X 750 X 1070	B55H	Honda/Onga	Pull Petrol
FTRC600-55	600	5.5	1720 X 890 X 1050	B55H	Honda/Onga	Pull Petrol
FTRC600-55-HR*	600	5.5	1720 X 890 X 1150	B55H	Honda/Onga	Pull Petrol
FTRC800-55	800	5.5	1720 X 890 X 1260	B55H	Honda/Onga	Pull Petrol
FTRC800-55-HR*	800	5.5	1720 x 890 x 1360	B55H	Honda/Onga	Pull Petrol

*HR - Includes 36m Hose Reel

KEY FEATURES

- Tough and durable one-piece moulding
 - Sits directly on any flat surface
 - High strength, lightweight polyethylene construction
 - 12m hose with fire fighting nozzle
 - Optional Bottom Fill Kit (**BFK**) available.
 - Wear pads to allow airflow underneath and protect ute tray
 - 36m Hose Reel & Fire-Fighting Nozzle with all -HR models
 - Provision for strap
- *Refer to Water Cartage & Fire Fighting Pumps page 38 for full pump details



Skid Mounted Packages



CODE	CAPACITY (Litres)	STARTER	DIMENSIONS (L x W x H)	PUMP CODE
FTRS600-S	600	Pull-Petrol	1685 x 1160 x 810	B65HT
FTRS600ES-S	600	Electric-Petrol	1685 x 1160 x 810	B65HTES
FTRS800-S	800	Pull-Petrol	1720 x 1500 x 810	B65HT
FTRS800ES-S	800	Electric-Petrol	1720 x 1500 x 810	B65HTES
FTRS1200-S	1,200	Pull-Petrol	1720 x 1500 x 1075	B65HT
FTRS1200ES-S	1,200	Electric-Petrol	1720 x 1500 x 1075	B65HTES
FTRS2000-S	2,000	Pull-Petrol	2850 x 1480 x 1145	B65HT
FTRS2000ES-S	2,000	Electric-Petrol	2850 x 1480 x 1145	B65HTES
FTRS3000-S	3,000	Pull-Petrol	2850 x 1540 x 1370	B65HT
FTRS3000ES-S	3,000	Electric-Petrol	2850 x 1540 x 1370	B65HTES

KEY FEATURES

- 6.5HP Honda powered twin-impeller onga (pentair) pump
- 36m hose reel and fire fighting nozzle included
- Heavy duty galvanised skid frame
- Fork on - fork off capability
- Bottom fill manifold with 6m suction hose
- Optional dust suppression nozzle kit available (**DSN20K**)

*Refer to Pump page 38 for full pump details

Skids Only

CODE	COMPATIBILITY	DIMENSIONS L x W x H
SKID600-S	600Ltr FTR Tanks	1685 x 1180 x 100
SKID800-1200-S	800 - 1200Ltr FTR Tanks	1720 x 1380 x 100
SKID2000-3000-S	2000 - 3000 Ltr FTR Tanks	2850 x 1480 x 100



Trailer Packages



CODE	CAPACITY (Litres)	PUMP*	STARTER	ENGINE/ PUMP	TANK DIMENSIONS (L x W x H)	TRAILER DIMENSIONS (L x W x H)
FTRT1200-S	1200	B65HT	Pull - Petrol	Honda/Onga	1500 x 1190 x 975	3940 x 1770 x 1500
FTRT1200TES-S	1200	B65HTES	Electric - Petrol	Honda/Onga	1500 x 1190 x 975	3940 x 1770 x 1500
FTRT1200TESD-S	1200	FFDPTES	Electric - Diesel	Yanmar/Onga	1500 x 1190 x 975	3940 x 1770 x 1500
FTRT2000-S	2000	B65HT	Pull - Petrol	Honda/Onga	2280 x 1280 x 1040	4460 x 1970 x 1650
FTRT2000ES-S	2000	B65HTES	Electric - Petrol	Honda/Onga	2280 x 1280 x 1040	4460 x 1970 x 1650
FTRT2000ESD-S	2000	FFDPTES	Electric - Diesel	Yanmar/Onga	2280 x 1280 x 1040	4460 x 1970 x 1650

KEY FEATURES - TRAILER

- Hot dip galvanised dual axle trailer
- 14" wheels - 5 stud pattern
- Electric brakes - 2000ltr
- Hydraulic brakes - 1200ltr
- Road pack including brakes and LED lights
- Emergency breakaway protection - 2000ltr
- Compliance plate - road registrable


KEY FEATURES - TANK AND PUMP

- 6.5HP Honda powered twin impeller pump
- 400mm 1/4 turn hinged lid
- Trailer mounted toolbox to protect the hose
- Suction return manifold with 6m suction hose
- 36m Hose reel & fire fighting nozzle
- Optional dust suppression nozzle kit available (**DSN20K**)
- *Refer to Water Cartage & Fire Fighting Pumps page for full pump details



Pumps & Accessories

CODE	DESCRIPTION	ENGINE/ PUMP	STARTER	POWER (HP)	HEAD (m)	FLOW (LPM)	INLET	OUTLET	# OF OUTLETS	WARRANTY (yrs)
MB25L	Mini Blaze 2.5HP	Loncin/ Onga	Pull - Petrol	2.5	21	133	25mm BSPM	25mm BSPM	1	1
B55H	Honda 5.5HP Single Impeller	Honda/ Onga	Pull - Petrol	5.5	60	585	32mm BSPM	25mm, 25mm, 40mm BSPM	3	2
B65HT	Honda 6.5HP Twin Impeller	Honda/ Onga	Pull - Petrol	6.5	100	373	50mm BSPM	25mm, 25mm, 40mm BSPM	3	2
B65HTES	Honda 6.5HP Twin Impeller Electric Start	Honda/ Onga	Electric - Petrol	6.5	100	373	50mm BSPM	25mm, 25mm, 40mm BSPM	3	2
FFDPTES	Yanmar 7HP Diesel Electric Start	Yanmar/ Onga	Electric - Diesel	7	100	450	50mm BSPM	25mm, 25mm, 40mm BSPM	3	2


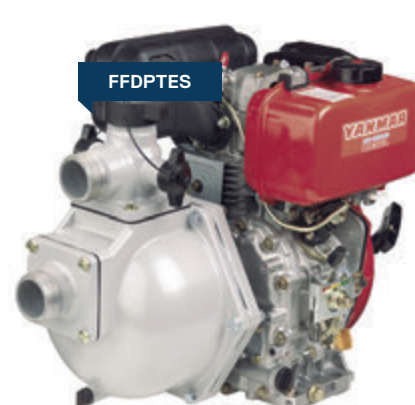


Fire Fighting Accessories

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
BFK	Bottom Fill Kit - Suits FTRC 5.5HP Compact Fire Units	
FFHR1	Hose Reel Only 20mm x 36mtr	555 DIA x 165W
TFFK	Tank Fire Fighting Kit with 36mtr Hose reel on galvanised stand	900 x 600 x 700
FHR	Manual Hose Reel 20mm x 36mtr	427 x 391 x 380
DSN20K	Dust Suppression Nozzle	
FHRC36	Fire Hose Reel Cover - suits 36m hose	600 x 205 x 580
FHRC50	Fire Hose Reel Cover - suits 50m hose	575 x 270 x 600



* Does not include hose

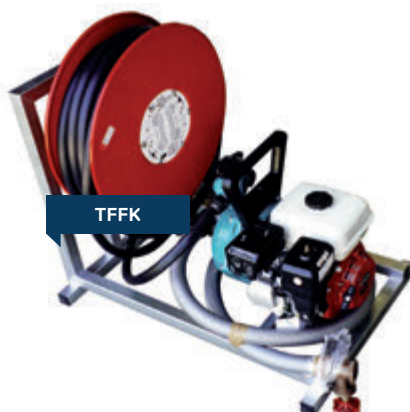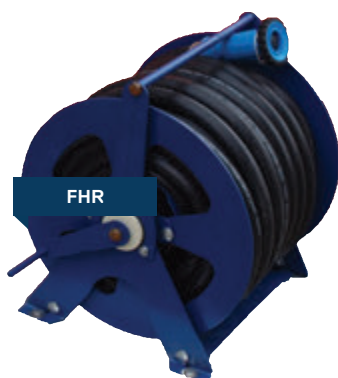

* Includes hose



AGRICULTURE & FARMING



Liquid Fertiliser Storage



Self-Draining Tanks

CODE	CAPACITY (Litres)	DIAMETER (mm)	OVERALL HEIGHT
LFTSDT23000	23,000	3450	3054
LFTSDT28000	28,000	3450	3601
LFTSDT33000	33,000	3450	4149

KEY FEATURES	
• Completely self-draining tank base (100% drainage) • To suit liquids up to to 1.5SG • Top fill kit – 2" (50mm) SS camlock with ball valve • Sight tube level indicator	• 2" (50mm) SS outlet with ball valve + camlock • 90mm overflow/breather (mesh screen) • 600mm vented screw lid for easy access



COLOUR RANGE		
BGE	MON	MGR

Liquid Fertiliser Storage



Flat Bottom Tanks

CODE	CAPACITY (Litres)	DIAMETER	OVERALL HEIGHT	OUTLET SIZE	TOP FILL KIT
LFT9000	9,000	2500	2260	50	LFTK
LFT13600	13,600	3100	2450	50	LFTK
LFT22500	22,500	3560	2800	50	LFTK
LFT31700	31,700	4100	3040	50	LFTK
LFT50KL	50,000	4600	3440	50	LFTK

KEY FEATURES

- Heavy duty construction to suit liquids up to 1.4SG
- Level indicator as standard
- Optional top fill kit
- Inspection cover
- Standard with 50mm Stainless Steel Outlet, Ball Valve and Camlock



LFTK

*Optional extra



LFT22500

*Pole not included

STANDARD FITTINGS AND LOCATIONS

12:00	Inspection Cover
12:30	2" Stainless Steel Outlet (LH02SS)
12:30	2" Stainless Steel Camlock (bottom fill connection)
12:30	2" Stainless Steel Ball Valve
1:30	Liquidator - True Level Indicator (LQ01)
2:30	Breather / Overflow

3" STAINLESS STEEL UPGRADE OPTION

- 3" Outlet (**LH03SS**)
- 3" Camlock (**SC80-F**)
- 3" Ball Valve (**SSBV3**)

Fertiliser Mixing Tanks



Fertigation Tank + Base & Venturi Fitout

CODE	CAPACITY	DIMENSIONS	LID
FT2000B+V	2,000 ltr	2000 DIA x 1000 H	FTL2000
FT5000B+V	5,000 ltr	2850 DIA x 1180 H	
FT9000B+V	9,000 ltr	3500 DIA x 1280 H	
FTL2000	Lid to suit 2,000 ltr Fertigation Tank	2180 DIA	




Recommended Pump for Venturi Setup

CODE	DESCRIPTION	ENGINE/ PUMP	POWER (HP)	HEAD	FLOW (LPM)	INLET	OUTLET	WARRANTY
HTP750VR	Chemical Transfer Pump Honda 6.5HP	Honda/Onga	6.5	40m	750	50mm NPT	50mm NPT	2 years

KEY FEATURES

- No internal pipework within tank to get in the way
- Self draining tank with integrated moulded sump connects to PVC 65mm, 100mm for 5000 & 9000 Ltr
- PVC pipe not included
- 10 degree sloping base
- 50mm Camlock with base & venturi set up
- Pumps to suit venturi system available

DIAGRAM

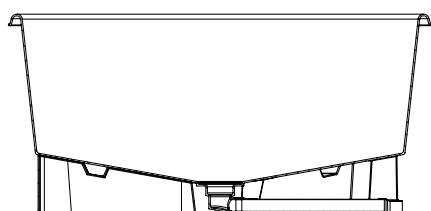

Vortex Plate



Venturi Agitators



Camlock Connection



Petrol or Diesel pumps available



Aquaculture

Aquaculture Tanks

CODE	DESCRIPTION	DIMENSIONS	POLY RISER	FLOOR SLOPE ANGLE	WATER CONTROLLER KIT
FT200	200 ltr Flat Bottom Tank	800 DIA x 560 H			
FT500B	500 ltr Tank + Base	1000 DIA x 1000 H	APRS	80mm	WCK01
FT1000B	1,000 ltr Tank + Base	1040 DIA x 1200 H	APRS	40mm	WCK01
FT2000B	2,000 ltr Tank + Base	2140 DIA x 1000 H	APRS	150mm	WCK01
FT5000B	5,000 ltr Tank + Base	2850 DIA x 1180 H	APRS	120mm	WCK02
FT9000B	9,000 ltr Tank + Base	3500 DIA x 1280 H	APRS	100mm	WCK02
FTL2000	Lid to suit 2000L Tank	2180 DIA			



DIAGRAM

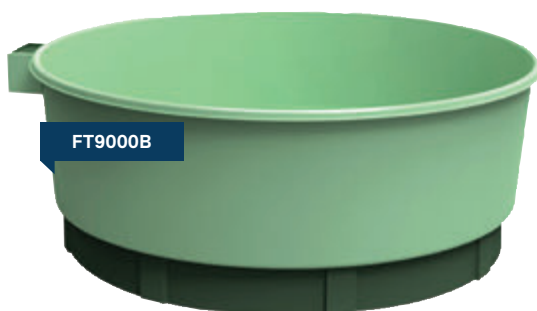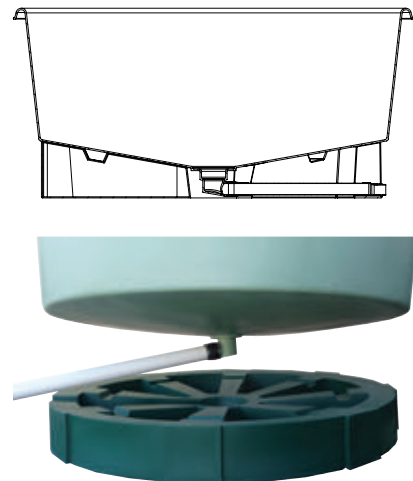

Round Water Troughs



Master Tub Troughs - with float

CODE	CAPACITY (Litres)	DIMENSIONS	FLOAT INLET	PRESSURE	DRAIN	DRAIN CAP	FLOAT COVER
MT2	200	970 DIA x 375H	25mm BSPM	140psi / 965 kPa	75	DC3	MTFC
MT6	600	1400 DIA x 520H	25mm BSPM	140psi / 965 kPa	75	DC3	MTFC
MT12	1,200	1765 DIA x 600H	25mm BSPM	140psi / 965 kPa	75	DC3	MTFC
MT24	2,400	2380 DIA x 650H	25mm BSPM	140psi / 965 kPa	75	DC3	MT05
MT45	4,500	3730 DIA x 650H	25mm BSPM	140psi / 965 kPa	75	DC3	MT04

PolyChoice Troughs - with float

CODE	PROFILE	CAPACITY (Litres)	DIMENSIONS	FLOAT INLET	PRESSURE	DRAIN	DRAIN PLUG
PCTR22	Round	220	1000 DIA x 400H	20 BSPM	150psi / 1034kPa	50	DP2
PCTR66	Round	660	1500 DIA x 500H	20 BSPM	150psi / 1034kPa	50	DP2
PCTR120	Round	1200	1900 DIA x 530H	20 BSPM	150psi / 1034kPa	50	DP2

KEY FEATURES

- Easy to service float valves
- Full float protection
- Drain cap at very base of trough so maximum amount of water will empty when draining
- Easy to service float valve
- Raised float allows trough to fill completely




Float + Float Cover



Drain Cap



Float Cover



Drain Cap

Round Water Troughs

Bare Round Water Troughs - no float

CODE	CAPACITY (Litres)	DIMENSIONS	DRAIN	DRAIN CAP
PT12W	250	1000 DIA x 420H	75	DC3
PT10W	500	1200 DIA x 500H	75	DC3
PT11W	1,000	1650 DIA x 600H	75	DC3
PT13W	2,000	2100 DIA x 600H	75	DC3





Stock Water Tank & Trough

CODE	DESCRIPTION	CAPACITY	DIMENSIONS	FLOAT INLET	DRAIN	DRAIN CAP	FLOAT COVER
SWT4500	Tank & Trough Combination	4500ltr	2500 DIA x 2000H	25mm BSPP	75	DC3	SWTC
SWT15	Trough Only - inc Float Valve & Cover	1500ltr	2500 DIA x 375H	25mm BSPP	75	DC3	SWTC

KEY FEATURES

1. Inspection cover
2. Full float cover to protect valve from stock damage
3. Inlet connection
4. 25mm float valve mounted in bottom of wall to maintain level in trough
5. 75mm drain cap in trough
6. 25mm tank inlet and 25mm float valve supplied

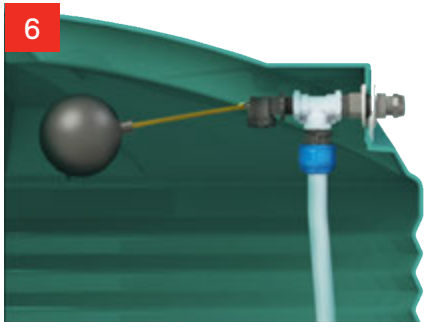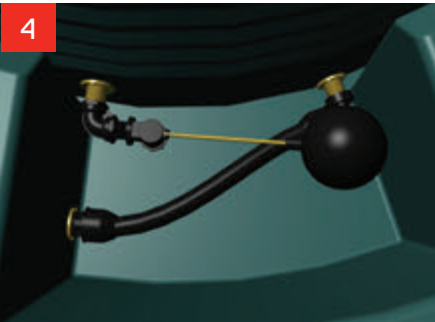

Long Water Troughs



Supa Troughs - with float

CODE	DESCRIPTION	CAPACITY (Litres)	PRESSURE	DIMENSIONS (L x W x H)	FLOAT COVER	DRAIN CAP
SPT5	5 foot	250	140psi / 965 kPa	1500 x 600 x 375	SPTA	DC3
SPT9	9 foot	450	140psi / 965 kPa	2700 x 600 x 375	SPTA	DC3
SPT12	12 foot	600	140psi / 965 kPa	3700 x 600 x 375	SPTAL	DC3

KEY FEATURES

- One-piece trough incorporating float cover
- Long lasting UV resistant polyethylene
- Flexible and durable
- Raised cover allows trough to fill fully
- 25mm Float Valve & Cover + 75mm Bung each end



Float + Float Cover



Drain Cap



Polychoice Troughs - with float


CODE	PROFILE	CAPACITY (Litres)	DIMENSIONS (L x W x H)	FLOAT INLET	PRESSURE	DRAIN	DRAIN PLUG
PCTL12	Long	160	1200 x 600 x 375	25 BSPM	150psi / 1034kPa	50	DP2
PCTL24	Long	360	2400 x 600 x 375	25 BSPM	150psi / 1034kPa	50	DP2

'M' Series Troughs - with float

CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)	FLOAT COVER
PTM31W	140	2400 x 460 x 175	PTMFC
PTM32W	100	1800 x 460 x 175	PTMFC
PTM33W	60	1200 x 460 x 175	PTMFC
PTM34W	35	750 x 460 x 175	PTMFC

KEY FEATURES


- Long lasting UV resistant polyethylene
- Flexible and durable
- Stackable for storage
- 15mm float valve and cover
- In built eyelets for securing to ground

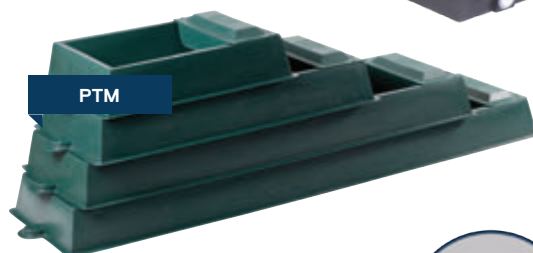

PTM



Float Cover



Fully Enclosed Float

Long Water Troughs



Sweep Ballast Troughs

CODE	DESCRIPTION	CAPACITY	DIMENSIONS (L x W x H)	FLOAT COVER	BROOM	DRAIN PLUG
SWP250	Trough with 25mm Float Valve	250 ltr	3492 x 580 x 350	SWP250FC	STB250	DP2
SWP250-40	Trough with 40mm Float Valve	250 ltr	3492 x 580 x 350	SWP250FC	STB250	DP2
SWP450	Trough with 25mm Float Valve	450 ltr	3495 x 772 x 375	SWP450FC	STB450	DP2
SWP450-40	Trough with 40mm Float Valve	450 ltr	3495 x 772 x 375	SWP450FC	STB450	DP2
SWP450-50	Trough with 50mm Float Valve	450 ltr	3495 x 772 x 375	SWP450FC	STB450	DP2

KEY FEATURES

- Easy cleaning - smooth sweep out end
- Flexible and durable
- Hinged float cover prevents any damage to inlet
- Tough double skin unit for extra strength
- 50mm Drain Plug
- Contoured brooms available for easy sweep out cleaning



Float Cover SWP250



Float Cover SWP450



* SWP250 = approx 240 Litres
SWP450 = approx 300 Litres



Feed Troughs

Calf Feeding - Dry Feed Troughs

CODE	CAPACITY (kg)	DIMENSIONS (L x W x H)	POLY INSERT
PTC36F	68kg	2400 x 300 x 600	PTC36I
PTC37F	52kg	1800 x 300 x 600	PTC37I

KEY FEATURES

- Galvanised frames with splayed legs for greater stability.
- Provision for pegging down



'M' Series Troughs

CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)
PTM31F	140	2400 x 460 x 185
PTM32F	100	1800 x 460 x 185
PTM33F	60	1200 x 460 x 185
PTM34F	35	750 x 460 x 185

KEY FEATURES

- Long lasting UV resistant polyethylene
- Stackable for storage
- Flexible and durable
- In built eyelets for securing to ground



Continuous Dry Feed Trough

CODE	DESCRIPTION	DIMENSIONS (L x W x H)	ANCHORING PEGS (6 pack)
CFT8	No Ends	2320 x 230 x 85	FTP9
CFT8E	Ends Both Sides	2320 x 230 x 85	



Trough Spares

Float Valves

CODE	DESCRIPTION
AFV2	25mm (1") Plastic Sleeve Valve to suit Supa Troughs, Master Tubs and Longline Troughs Pressure range 0 - 965kpa (0 - 140psi)
AFV2SEAL	Float Valve Seal AFV2
AFV3B	32mm (1¼") Plastic Sleeve Valve - High Volume incl 40mm (1½") M & F Brass outlet. Pressure range 0 - 450kpa (0 - 65psi)
AFV4B	40mm (1½") Plastic Sleeve Valve - High Volume incl 50mm (2") M & F Brass Outlet. Pressure range 0 - 450kpa (0 - 65psi)
AFV5B	50mm (2") Plastic Sleeve Valve - High Volume incl 2½" M & F Brass Outlet. Pressure range 0 - 450kpa (0 - 65psi)
AFV6	25mm (1") Plastic piston valve to suit MT2, MT6 (fitted prior to May 2009) Pressure range 0 - 1400kpa (0 - 200psi)
AFV6L	25mm piston valve long arm 1400KPA rating
AFV0L	15mm (1/2") Philmac Float Valve - Long Arm For PT49W, PT50W & M Troughs
JFV20	20mm Jobe Float Valve for PolyChoice Troughs Pressure range 0 - 1034kpa (0 - 150psi)



Drain Caps & Plugs

CODE	DESCRIPTION
DC2	50mm (2") Drain Cap for all longline troughs, PT48W, PT49W & PT50W
DCSE	Seals only for 50mm (2") Drain Cap
DC3	75mm (3") Drain Cap
DC3SE	Seals only for 75mm (3") Drain Cap
DP2	50mm (2") Drain Plug
DPSE	Seals only for 50mm (2") Drain Plug



Float Covers

CODE	DESCRIPTION
PTMFC	Float cover for PTM31W, PTM32W, PTM33W, PTM34W
MTFC	Float cover for MT2, MT6, MT12
SWTC	Float cover for SWT4500, SWT15
SPTA	Float cover for SPT5, SPT9
SPTAL	Float cover for SPT12
SWP250FC	Float cover for SWP250, SWP250-40, SWP250-50
SWP450FC	Float cover for SWP450, SWP450-40, SWP450-50

Fence & Stable Drinkers - with float

CODE	FENCE BRACKETS	CAPACITY (Litres)	DIMENSIONS (L x W x H)	BRACKETS & MOUNTS	DRAIN CAP
PT48W	-	8	300 x 300 x 224	PT14BR	DC2
PT48WB	Yes	8	300 x 300 x 224	PT14BR	DC2
PT49W	-	25	440 x 380 x 350	PT49BRS	DC2
PT49WB	Yes	25	440 x 380 x 350	PT49BR	DC2
PT50W	-	45	490 x 430 x 440	PT49BRS	DC2
PT50WB	Yes	45	490 x 430 x 440	PT49BRS	DC2
PT90W	Yes	90	550 x 1090 x 400	PT90BRS	DC2

KEY FEATURES

- Drain cap for easy cleaning
- Fix directly to the wall or brackets available for fence hanging
- Stylish colours available



Fence & Stable Feeders

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	BRACKETS & MOUNTS
PT02	Feeder + fence brackets	45	540 x 410 x 380	PT49BRS
PT02FS	Feeder + wall mount brackets	45	540 x 410 x 380	PT02STBR
PT03	Hayrack (suitable to hang on fence)		600 x 500 x 700	PT03R
PT14	Fence Feeder 'D' Type	32	440 x 400 x 250	PT14BR
PT15	Corner Feeder	32	450 x 450 x 270	PT14BR
PTF18	Tyre Feeder	18	350 DIA x 195H	

COLOUR RANGE




Equine

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
FSB200	Feed Storage Bin 200 ltr-Hinged Lid	520 x 860 x 560
HSP	Mounting Block - Handi Step 120kg SWL	700 x 520 x 670
POB20	20ltr Buckets with level measurements	
PSC	Feed Scoops holds 2.5kg pellets	

Accessories

CODE	DESCRIPTION
PTWK7	Spacesaver 15mm (½") piston valve for PT48W (Pressure range 0 - 850kpa (0 - 120psi))
DC2	50mm (2") Drain Cap for PT48W, PT49W & PT50W Drinkers
DCSE	Seals only for 50mm (2") Drain Cap

COLOUR RANGE BUCKETS & FEED SCOOPS

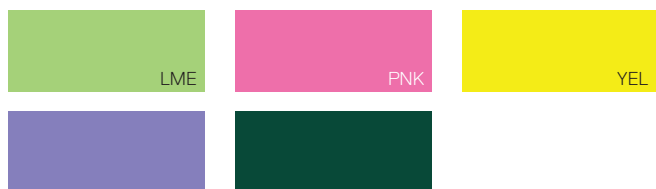

Calving & Cattle




Molasses Storage Tanks

CODE	PROFILE	CAPACITY (Litres)	DIAMETER	OVERALL HEIGHT	INLET HEIGHT	OUTLET SIZE
MOL13600	Corrugated	13,600	3100	2450	2100	80
MOL22500	Corrugated	22,500	3560	2800	2470	80
MOL31700	Corrugated	31,700	4100	3040	2610	80
MOL50KL	Smooth	50,000	4600	3440	3290	80

KEY FEATURES

- Heavy duty wall thickness
- Ideal for liquids up to 1.4SG
- Standard with 80mm brass outlet and inspection cover
- Fitted with overflow as breather and screen

DIMENSIONS



Fit Out Clock




MOL31700

Molasses Feeder

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
PT05	Licker Drum 100 ltr	800 X 700 X 425
PT05C	Case only	
PT05R	Roller only	

KEY FEATURES

- Urea feeding and bloat control
- Removable roller for cleaning
- Floating roller - no metal bearings

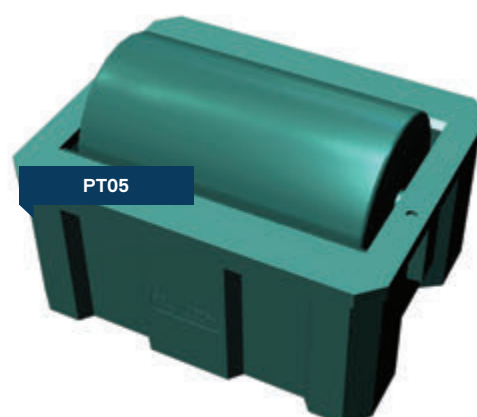

PT05

Calving & Cattle

Calf Milk Feeders

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	BRACKETS & MOUNTS	TEAT & CAP	TEAT
MBP	Single Teat Milk Bottle	2	100 x 180 x 250		PCT/SCIT	PCT
MM1P	Single Teat Feeder	5	200 x 200 x 300		PCT/SCIT	PCT
MM5P	5 Teat Feeder - Divisional	30	270 x 760 x 300	MM5BR	PCT/SCIT	PCT
MM8P	8 Teat Feeder - Divisional	40	340 x 1130 x 300	MM12BR	PCT/SCIT	PCT
MM12P	12 Teat Feeder - Divisional	70	540 x 1260 x 320	MM12BR	PCT/SCIT	PCT
MM13P	13 Teat Feeder - Divisional	70	280 x 1800 x 330	MM12BR	PCT/SCIT	PCT

KEY FEATURES

- Generous spacing between teats
- Teat caps easily unscrew to wash out feeder
- Galvanised hanging brackets to suit rail spacing
- UV stabilised poly for long outdoor use



MBP



MM1P



MM5PPNK



MM5P



MM8P



MM12P

Mobile Gravity Milk Feeders



CODE	DESCRIPTION	CAPACITY	DIMENSIONS (L x W x H)	MANIFOLD
MG40P	40 Teat Feeder - single axle	400 ltr	2200 x 1500 x 1200	MG4M
MG50P	50 Teat Feeder - single axle	400 ltr	2800 x 1500 x 1200	MG5M
MG50TAP	50 Teat Feeder - dual axle	400 ltr	2800 x 1500 x 1200	MG5M
MG50LTAP	50 Teat Feeder - dual axle	800 ltr	2800 x 1500 x 1200	MG5M
MG60P	60 Teat Feeder - dual axle	800 ltr	3100 x 1550 x 1500	MG6M
MG400T	400 ltr (tank only)	400 ltr		
MG800T	800 ltr (tank only)	800 ltr		



Mobile Mixer and Tanker

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
MMT400	400 ltr - 2.5HP Pump	2200 x 1500 x 1200




Riverina Milk Transporter

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
RMT	200 ltr - single axle	1700 x 1200 x 1000



Milk Transfer Pump Kit

CODE	DESCRIPTION	FLOW (LPM)
MTP110	Milk Transfer Submersible pump kit 12V	40



KEY FEATURES

- Fully hot dipped galvanised trailers
- Screw on teats can be replaced with blanks
- Adjustable fold away jockey wheel
- Built in backwash for all trailer units
- Self cleaning washing head used in tank
- Large hinged filling lids

Footrot Baths



CODE	DESCRIPTION	DIMENSIONS (L x W x H)	CAPACITY (Max Litres)
FRB	FRB Standing Type	2530 x 1000 x 200	300
RFRB	RFRB Race Type	2400 x 480 x 200	80

KEY FEATURES - STANDING	KEY FEATURES - RACE
- Control hoof diseases in sheep and goats - Use with portable yard to keep animals confined - Lightweight for ease of handling *Not recommended for cattle and horses	- Non slip dimpled floor - End to end linking feature - Will not rot, rust or flake and fully chemical resistant
	- Control hoof diseases in sheep and goats - Unique pyramid shaped rib through centre of trough - Keep hooves either side of the trough - Added strength and support to trough floor *Not recommended for cattle and horses
	- Reduce amount of solution needed to treat stock - Non slip dimpled floor - End to end linking feature is ideal for placing in sheep race - Will not rot, rust or flake and fully chemical resistant



Lambing

Lamb Milk Feeders

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	BRACKETS & MOUNTS	TEATS & CAPS	TEATS
FLBF	Clear Single Teat Milk Feeders	1	80 x 80 x 300		LT/BC	LT
MBL	Single Teat Milk Bottle	2	100 x 180 x 250		LT/SC	LT
MM1L	Single Teat Feeder	5	200 x 200 x 300		LT/SC	LT
MM5L	5 Teat Feeder - Divisional	30	270 x 760 x 300	MM5BR	LT/SC	LT
MM8L	8 Teat Feeder - Divisional	40	340 x 1130 x 300	MM12BR	LT/SC	LT
MM12L	12 Teat Feeder - Divisional	70	540 x 1260 x 320	MM12BR	LT/SC	LT
MM13L	13 Teat Feeder - Divisional	70	280 x 1800 x 330	MM12BR	LT/SC	LT

KEY FEATURES

- Generous spacing between teats
- Teat caps easily unscrew to wash out feeder
- Galvanised hanging brackets to suit rail spacing
- UV stabilised poly for long outdoor use



Milk Test Buckets

CODE	CAPACITY (Litres)	DIMENSIONS	SEAL	LID & SEAL
PTB25	25	300 DIA x 490H	PTBS	PTBL25
PTB32	32	330 DIA x 510H	PTBS	PTBL32

KEY FEATURES

- Stainless steel handles
- Pipe attachments to suit 5/8" or 3/4" tubing
- Replacement Seals Available



Calf & Lamb Accessories

Accessories

CODE	DESCRIPTION
HL4	Hinged Lid 400mm for All MG40, MG50 & MG60 Calf Feeders
JWK	Jockey Wheel Kit - to suit Mobile Gravity Calf Feeder
MG2W	16" Wheel only for MG26 Calf Feeder (no axle)
MG4W	18" Wheel only for MG40, MM50, MG50 & Calf Feeder (no axle) each
MG4M	20 Teat manifold for MG40 Calf Feeder (Specify front or rear)
MG5M	25 Teat manifold for MG50 Calf Feeder (Specify front or rear)
MG6M	30 Teat manifold for MG60 Calf Feeder (Specify front or rear)
MGD1	Mud guards for single wheel calf feeders (Set of 2)
MGD2	Mud guards for tandem wheel calf feeders (Set of 2)
SL5	Screw lid - complete 355mm (suits RMT)



Teats and Caps

CODE	DESCRIPTION
PCT	Peach Teats
SCITP	Screw Cap with internal thread for Peach Teats
PCT/SC	Peach Calf Teat pulled through Screw Cap
LT	Lamb Teat
LT/BC	Lamb Teat through Bottle Cap
LT/SC	Lamb Teat through Screw Cap
SCL	Screw Caps for Lamb Teats
SCP	Screw Cap for Peach Teat



Brackets

CODE	DESCRIPTION
MM5BR	Brackets to suit MM5 and CF5 (Set of 2)
MM12BR	Brackets to suit MM8, MM12, MM13, CF12 & CF13 (Set of 2)
PT14BR	Set of Brackets to suit Fence Feeders PT14, PT15, PT48WB
PT49BR	Set of Brackets to suit PT49WB, PT50WB & PT02
PT02STBR	Set of wall Mount Brackets to suit PT02FS
PT03R	Galvanised Rack to suit PT03 Hayrack (Set of 2)



Farm Storage & Equipment



Bulka Bins

CODE	DESCRIPTION	CAPACITY (M ³)	DIMENSIONS (L x W x H)	LID
BB12	Galvanised frame	1.2	1200 x 1500 x 1600	BBLID
BB12XL	Galvanised frame - extended legs	1.2	1200 x 1500 x 2300	BBLID
BB16	Galvanised frame	1.6	1200 x 1500 x 1860	BBLID
BB16XL	Galvanised frame - extended legs	1.6	1200 x 1500 x 2560	BBLID

KEY FEATURES

- All galvanised forklift frame - lifts on/off easily
- Stainless steel chute which is rodent and weather resistant
- Extended leg models allow for bag filling
- Suitable for grains, pellets and more
- Stackable - Space Saving

PRODUCT


	BB12	BB16
Wheat & Meatmeal	960kg	1200kg
Barley	750kg	1000kg
Oats	600kg	800kg
Urea	876kg	1200kg
Lucerne	300kg	400kg
Calf & Pig Pellets	800kg	1050kg



Lid



Handle



Flap

Farm Storage & Equipment



Silomaster / Cone Bottom Tanks

DRY OUTLET	LIQUID OUTLET	CAPACITY (Litres)	DIMENSIONS
SM5000D	SM5000L	5,000	2380DIA x 3030H
SM7500D	SM7500L	7,500	2380DIA x 3620H
SM10000D	SM10000L	10,000	2380DIA x 4210H
SM20000D	SM20000L	20,000	3450DIA x 4376H
SM25000D	SM25000L	25,000	3450DIA x 4923H
SM30000D	SM30000L	30,000	3450DIA x 5471H



Heavy Duty - Suitable to hold liquids up to 1.5SG

DRY OUTLET	LIQUID OUTLET	CAPACITY (Litres)	DIMENSIONS
SM5000D-1.5	SM5000L-1.5	5,000	2380DIA x 3530H
SM7500D-1.5	SM7500L-1.5	7,500	2380DIA x 4115H
SM10000D-1.5	SM10000L-1.5	10,000	2380DIA x 4705H
SM20000D-1.5	SM20000L-1.5	20,000	3450DIA x 4376H
SM25000D-1.5	SM25000L-1.5	25,000	3450DIA x 4923H
SM30000D-1.5	SM30000L-1.5	30,000	3450DIA x 5471H




Dry Feed Frame

CODE	CAPACITY (Litres)	DIMENSIONS
SMDF5000	5,000	2380DIA x 3525H
SMDF7500	7,500	2380DIA x 4115H
SMDF10000	10,000	2380DIA x 4705H

KEY FEATURES

- Sturdy galvanised steel frame and rust proof poly tank
- Rodent and weather proof
- Integrated forklift channels
- Screw lid

COLOUR RANGE



Liquid Outlet



Tank Frame Connection Pins



Farm Storage & Equipment

Dog Houses

CODE	DESCRIPTION	DIMENSIONS (L x W x H)	OPENING SIZE
TDD1	Dinkum Doghouse 1	1050 x 780 x 690	390 DIA
TDD3	Log Cabin Doghouse	1060 x 860 x 780	280 x 400

KEY FEATURES	COLOUR RANGE
- Cooler in summer, warmer in winter - Rear venting to create airflow - Hygienic - easily washed out	HRD LGY MGR WHE



Vehicle Water Tanks

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)
HT28	Handi Tank only	28	415 x 240 x 380
HT28P	Handi Tank with mounting plate	28	415 x 240 x 380

KEY FEATURES	COLOUR RANGE
20mm tap for dispensing 20mm cap at top for easy filling	BLK GRY WHI



Tool Boxes

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)
BUC14	B'Ute Tool Box - Small	140	970 x 400 x 360
BUC26	B'Ute Tool Box - Large	266	1170 x 570 x 400
TBC20	Tradesman Box	200	980 x 390 x 600
TBC20FH	Tradesman Box + Friction Hinge	200	980 x 390 x 600

KEY FEATURES	COLOUR RANGE
- Flush mounted zinc hardware - Raised weather resistant lid seal - Removable internal tray included	BLK BLUE GRY RED



Farm Storage & Equipment



CODE	DESCRIPTION	DIMENSIONS (L x W x H)
GS40	Grain Shovel	1100 H
GAB2	Grain Hopper (Auger Boot) Fits 4-10 inch-Auguer	1100 x 1200 x 650



COLOUR RANGE - Shovel





Produce Bins & Liners

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	LID
PPB100	Produce Bin	1,000	1190 x 1190 x 1010	PPBL
PPB100FC	Produce Bin incl fork plates	1,000	1190 x 1190 x 1010	PPBL
PBL85	Liner Only	850	1110 x 1110 x 760	PBLD
PBL100	Liner Only	1,000	1110 x 1110 x 885	PBLD
PBL145	Liner Only	1,450	1110 x 1110 x 1200	PBLD
GBL	Grape Bin Liner	2,850	2170 x 1200 x 1100	GBLLIDN

KEY FEATURES - PPB100

- Stackable when full, nest them empty
- Optimum height for hand picking
- FEA analysis testing completed for strength
- Ideal pallet size for transporting
- Forklift access channels
- Food grade polyethylene

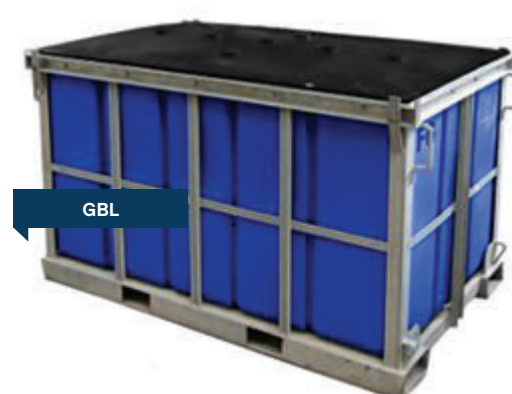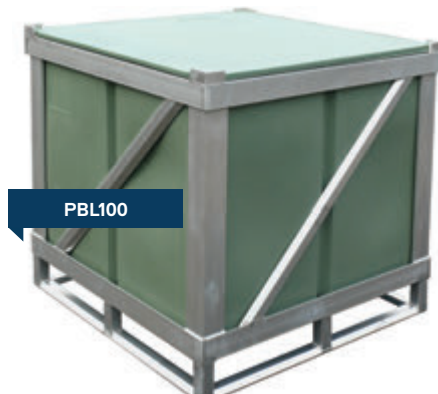

*Steel frames not included, only shown for illustrative purposes

Safety & Spill Containment

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
IBCB1100	IBC Bund 1100L	1680 x 1680 x 700
LSS1	Lead safe stand	500 x 500 x 2100
PTC6	Drum top cover to suit 205ltr	600 x 600 x 300
BCL	Bollard Cover - Large	Ø200 x 1780H
BCS	Bollard Cover - Small	Ø120 x 1780H
BT1	Butt Tidy	Ø410 x 1000H
DSBAR	Bund-a-rack	1280 x 1280 x 280
DSDB2	Drumsafe two drum bund	1550 x 75 x 450
DSDP	Drumsafe Drumpak	Ø780 x 1080H
DSEP4	Drumsafe Econopallet 4 Drum	1210 x 1210 x 300
DSP	Drumsafe Bundled Pallet	1280 x 1280 x 335
DSST1	Splash Tray 1 Drum	830 x 830 x 100
DSST2	Splash Tray 2 Drum	1560 x 810 x 145
DSST4	Splash Tray 4 Drum	1210 x 1210 x 100



Order Form

T 03 5033 9000

E sales@polymaster.com.au

W polymaster.com.au

Date: _____

Site Contact name: _____

Distributor: _____

Delivery Address (if not to store): _____

Distributor ID number: _____

Phone: _____

Contact name: _____

Email: _____

Phone: _____

Order no. (required) _____

NO	PRODUCT CODE	DESCRIPTION	COLOUR	QTY	UNIT PRICE (EX.GST)
1					
2					
3					
4					
5					
				FREIGHT	
				TOTAL	

ADDITIONAL OPTIONS			SIZE REQUIRED	QTY	UNIT PRICE	AMOUNT
UPGRADE OUTLET?	YES ☐	NO ☐				
ADDITIONAL OUTLET?	YES ☐	NO ☐				
MANHOLE COVER INSTEAD OF STRAINER? ☐			MANHOLE COVER IN ADDITION TO STRAINER? ☐			
ACCESSORIES REQUIRED?	YES ☐	NO ☐				

FILL IN ADDITIONAL DETAILS BELOW FOR TANK ORDERS ONLY - SELECT FITTING POSITIONS

Outlet:

Overflow:

Outlet:

Overflow:

Outlet:

Overflow:

* Minimum order \$300

* Tank specs available at polymaster.com.au

Email to sales@polymaster.com.au to place your order

Disclaimer: Colours and sizes may vary from details printed

Delivery & Installation

It is the owner's responsibility to provide clear access to site, and to secure tank/s left at site.

If the driver cannot reach the location, the tank/s will be left at the closest practical & safe position at the driver's discretion. If a tank can not be left at site, the owner will incur a redelivery charge.

All products can be delivered throughout Australia. Call us for a quote for deliveries outside nominated zones.

Nominated Zones Free Delivery

Polymaster offers free delivery to site throughout most of Victoria, South Australia and parts of Southern New South Wales for tanks exceeding 13,000ltrs (remote areas excluded). Please refer to our free delivery zone map on polymaster.com.au/delivery-installation.

All tanks less than 13,000ltrs are delivered free to store (within the nominated zone). A delivery fee will be incurred to deliver these tanks to site.

Delivery Requirements

Clearance required for truck and trailer is 19m long, 5m high, 3.5m wide. To put this into perspective, our trucks are longer than a semi-trailer.

The good news is that no-one is required to help the driver unload. Please provide free and easy access to your site and an identified 'marked' area for the tank to be unloaded. Our driver will unload as close as possible to your desired location.

If the driver deems the desired location to be too difficult to manoeuvre the truck into, the driver will identify a safe and secure place to unload within your property.

Please note: The driver is unable to physically position the tank onto the 'pad'. Exact positioning of the tank on the pad remains the responsibility of the property owner.

Note:

- It is the Owners responsibility to position the tank on the pad and to connect the tank.
- Please refer to lifting instructions (Polymaster.com.au/delivery-installation) for tanks greater than 25,000ltrs as lifting equipment will be required to position on the pad by the Owner.

Underground and Septic Tanks will require a lifting device (forklift etc) to unload from the truck. This is not supplied by the driver.

Re-Scheduling Fee

Please be advised that if the Owner chooses to change the delivery date, a re-scheduling fee will be incurred.

Installation Guide

Entry to tank is not required when installing a Polymaster tank!

The tank site must be firm, level and flat.

A concrete pad (min dia. of tank), or well compacted sand base or other consolidated fill such as crushed dust is recommended. This fill must be free of any rocks, stones or any sharp objects.

The sand base or other consolidated fill base must be 75mm – 100mm deep and at least 600mm larger in diameter than the tank base. The outside of the base must be supported by a retaining wall to prevent erosion.

The overflow must be piped well clear of the tank to avoid any undermining of the tank base.

Ensure that a flexible hose of at least 300 mm (12") is installed after the tank valve to absorb any shocks or movement.

If tank is placed on a stand, support pipework off the stand, never support pipework off the tank.



Note: Failure to properly install tank as per instructions will void warranty. Never enter a tank alone. Have an attendant stand by. Restricted Space - only enter after carrying out a Hazard Identification Risk Assessment (H.I.R.A.).

Index

PRODUCT CODE	PAGE	PRODUCT CODE	PAGE	PRODUCT CODE	PAGE	PRODUCT CODE	PAGE	PRODUCT CODE	PAGE
A									
AFV0L	50	BSLT2020PC	9	DMDS10000E	21	DSW10000+DK-12V	22	G	
AFV2	50	BT1	63	DMDT	27	DSW10000+DK-240V	22	GAB2	62
AFV2L-A	14	BUC14	61	DMDT-UTE	27	F			
AFV2LB	12, 14	BUC26	61	DMFC	28	FCV	28	GBL	62
AFV2SEAL	50	BV1	6, 8, 14	DMM4	27	FFDPTES	38, 39	GBLLIDN	62
AFV3B	50	BV1.5	14	DMP100E	23, 27	FFHR1	39	GS40	62
AFV4B	50	BV2	14	DMP200E	23, 27	FHR	39	H	
AFV5B	50	BV3	14	DMP400E	23, 27	FHRC36	39	HHR-370S-PC	15
AFV6	50	BV4	14	DMP600E	23, 27	FHRC50	39	HHR-370S-PC+CO	15
AFV6L	50	C		DMP800E	23, 27	FLBF	57	HL4	58
APRS	44	CFA1	14	DMP1200-S	24	FRB	56	HSJ1000	15
ATN65	28	CFA2	14	DMP1200-S-240V	24	FSB200	52	HSP	52
ATN90	28	CFAC	14	DMP2000-S	24	FT200	44	HT28	61
B									
B12KP-P	33	CFS1	14	DMP2000-S-240V	24	FT500B	44	HT28P	61
B12V-COMET	33	CFS2	14	DMP3000-S	24	FT1000B	44	HTP750VR	43
B12VP-P	33	CFT8	49	DMP3000-S-240V	24	FT2000B	43, 44	I	
B55H	36, 39	CFT8E	49	DMPD1200-S	24	FT2000B+V	43	IBCB1100	63
B65HT	37, 38, 39	CLG	13, 27, 28	DMPD2000-S	24	FT5000B	43, 44	IRS32	14
B65HTES	37, 38, 39	CLG-D	27, 28	DMPD3000-S	24	FT5000B+V	43	IRS40	14
BATN-P	33	CUBE56-12V	26	DMPF1200-S	24	FT9000B	43, 44	J	
BB12	59	CUBE70-240V	26	DMPF2000-S	24	FT9000B+V	43	JFV20	50
BB12XL	59	D		DMPF3000-S	24	FTL2000	43, 44	JOS90	13
BB16	59	DC2	50, 51, 52	DMPFT1200-S	25	FTP9	49	JWK	58
BB16XL	59	DC3	45, 46, 47, 50	DMPFT2000-S	25	FTR200	35	L	
BBLID	59	DC3SE	50	DMPQ400E	23, 27	FTR400	35	LFT50KL	42
BCL	63	DCF-70-A	28	DMPQB400E	23	FTR600-S	35	LFT9000	42
BCS	63	DCF-70-CART	28	DP2	45, 47, 48, 50	FTR600U	35	LFT13600	42
BDM-P	33	DCF-100-A	28	DP50K	27	FTR800-S	35	LFT22500	42
BFK	36, 39	DCF-100-CART	28	DP50PUMP	23	FTR800U	35	LFT31700	42
BM35TNB-RES	28	DCF-150-A	28	DP50PUMP12-ASY	24	FTR1200-S	35	LFTSDT23000	41
BM100-B	33	DCF-150-CART	28	DP50PUMP12V-ASY	27	FTR2000-S	35	LFTSDT28000	41
BM200B-P12	33	D-CONNECT2KIT	28	DP72KA	26	FTR3000-S	35	LFTSDT33000	41
BM400B-P12	33	DCSE	50, 52	DP72PUMP	24, 27	FTRC200-25	36	LGSO	13
BMCB-A	33	DFG100	27	DP85K	27	FTRC200-55	36	LH03SS	14, 42
BMCB-D	28	DFG200	27	DP85PUMP	24, 25, 27	FTRC400-25	36	LHO1	14
BMDS2300	31	DFG400	27	DP1224K	27	FTRC400-55	36	LHO1.5	14
BMDS3300	31	DFG600	27	DP1224PUMP	24, 27	FTRC400-55-HR	36	LHO1.5SS	14
BMDS5000	31	DFG800	27	DPK1	13	FTRC600-55	36	LHO1.25	14
BMDS7000	31	DH2020-4M	28	DPK1EXT	13	FTRC600-55-HR	36	LHO1.25SS	14
BMDS10000	31	DH2020-6M	28	DPM	27	FTRC800-55	36	LHO1SS	14
BMHR8-P	33	DH2025-4M	28	DPSE	50	FTRC800-55-HR	36	LHO2	14
BMLI	33	DH2025-6M	28	DSBAR	63	FTRS600ES-S	37	LHO2.5	14
BMS2000RPB	32	DHJ600	15	DSDB2	63	FTRS600-S	37	LHO2SS	14, 42
BMS4000RPB	32	DHJ800	15	DSDP	63	FTRS800ES-S	37	LHO3	14
BMS5000RPB	32	DHR10M25	28	DSEP4	63	FTRS800-S	37	LHO4	14
BMS7000RPB	32	DM100MF	23, 33	DSN20K	37, 38, 39	FTRS1200ES-S	37	LID-CD	11, 17, 18
BMS10000RPB	32	DM200MF	23, 33	DSP	63	FTRS1200-S	37	LQ01	13, 42
BMSL2000RPB	32	DM400MF	23, 33	DSST1	63	FTRS2000ES-S	37	LSS1	63
BMSL3000RPB	32	DM400GBUND	28	DSST2	63	FTRS2000-S	37	LT	57, 58
BMSL5000LGY-C	32	DM600MF	23	DSST4	63	FTRS3000ES-S	37	LT01	13
BMSL5000RPB	32	DM800MF	23	DSW5000	22	FTRS3000-S	37	LT/BC	57, 58
BMTN-P	33	DM1200-S	24	DSW5000+DK-12V	22	FTRT1200-S	38	LT/SC	57, 58
BSFMS	28	DM2000-S	24	DSW5000+DK-240V	22	FTRT1200TESD-S	38	LWD	13
BSLT2020H4	9	DM3000-S	24	DSW7000	22	FTRT1200TES-S	38	M	
BSLT2020H5	9	DMDS5000	21	DSW7000+DK-12V	22	FTRT2000ESD-S	38	MB25L	36, 39
		DMDS7000	21	DSW7000+DK-240V	22	FTRT2000ES-S	38	MBL	57
		DMDS10000	21	DSW10000	22	FTRT2000-S	38	MBP	54

Index

PRODUCT CODE	PAGE	PRODUCT CODE	PAGE	PRODUCT CODE	PAGE	PRODUCT CODE	PAGE	PRODUCT CODE	PAGE			
MCBKEYS	28	P		PT05R	53	RWT1600	6, 7, 13	SSBV1.5	14			
MCBKEYS-RED	28			PT10W	46	RWT2270LP	6	SSBV1.25	14			
MCBPCIF	28			PT11W	46	RWT2270T	6, 13	SSBV2	14			
MCBSW	28			PT12W	46	RWT3300	6, 7, 13	SSBV3	14, 42			
MG2W	58			PT13W	46	RWT4500LP	6, 7	SSBV4	14			
MG4M	55, 58			PT14	51, 58	RWT4500T	6	ST3100	17			
MG4W	58			PT14BR	51, 58	RWT5000	6, 7	ST4550	17			
MG5M	55, 58			PT15	51, 58	RWT7100	6, 7	STB250	48			
MG6M	55, 58			PT48W	50, 51, 52	RWT9000	6, 7	STB450	48			
MG40P	55			PT48WB	51, 58	RWT13600	6, 7	STBOXBASIC	26			
MG50LTAP	55			PT49BR	51, 58	RWT22500	6	STMETER240V	26			
MG50P	55			PT49BRS	51	RWT31700	6	STRUT430MM-200N	28			
MG50TAP	55			PT49W	50, 51, 52	S		SWP250	48, 50			
MG60P	55			PT49WB	51, 58		S2	6, 14	SWP250-40	48, 50		
MG400T	55			PT50W	50, 51, 52		S3	6, 8, 10, 14	SWP250FC	48, 50		
MG800T	55			PT50WB	51, 58		S4	6, 8, 9, 10, 14	SWP450	48, 50		
MGD1	58			PT90W	51		S5	6, 8, 14	SWP450-40	48, 50		
MGD2	58			PT2132	14		SCITP	58	SWP450-50	48, 50		
MHC1	13			PT2140	14		SCL	58	SWP450FC	48, 50		
MHC3	13			PT2150	14		SCP	58	SWT15	46, 50		
MHC4	13			PTB25	57		SKID600-S	37	SWT4500	46, 50		
MHC5	13			PTB32	57		SKID800-1200-S	37	SWTC	46, 50		
MHC6	13			PTBL25	57		SKID2000-3000-S	37	T			
MHC8	9, 10, 13			PTBL32	57		SL5	58		TBC20w	61	
MHC9	10, 13			PTBS	57		SM5000D	60		TBC20FH	61	
MHCA	13			PTC6	63		SM5000D-1.5	60		TDD1	61	
MHR20-370	9, 15			PTC36F	49		SM5000L	60		TDD3	61	
MHR20-550	9, 15			PTC36I	49		SM5000L-1.5	60		TFFK	39	
MM1L	57			PTC37F	49		SM7500D	60		TIF3	13	
MM1P	54			PTC37I	49		SM7500D-1.5	60		TIF4	13	
MM5BR	54, 57, 58			PTF18	51		SM7500L	60		U		
MM5L	57			PTM31F	49		SM7500L-1.5	60			U-LID	11, 13, 17, 18
MM5P	54			PTM31W	47, 50		SM10000D	60			URRM	11, 13, 17, 18
MM8L	57			PTM32F	49		SM10000D-1.5	60			URT3300B	11
MM8P	54			PTM32W	47, 50		SM10000L	60			URT3300VF	11
MM12BR	54, 57, 58			PTM33F	49		SM10000L-1.5	60			URT3300VF/GP	11
MM12L	57			PTM33W	47, 50		SM20000D	60			URT3300VF/PC	11
MM12P	54			PTM34F	49		SM20000D-1.5	60			URT5000B	11
MM13L	57			PTM34W	47, 50		SM20000L	60			URT5000VF	11
MM13P	54			PTMFC	47, 50		SM20000L-15	60			URT5000VF/GP	11
MMT400	55			PTWK7	52		SM25000D	60		URT5000VF/PC	11	
MOL50KL	53			PW700-RND	18		SM25000D-1.5	60		URVF01	13	
MOL13600	53			PW700-SQR	18		SM25000L	60		URVF15	13	
MOL22500	53			PW1000-RND	18		SM25000L-1.5	60		URVF30	13	
MOL31700	53			PW1000-SQR	18		SM30000D	60		URVFR	13	
MT2	45, 50			PW1300-RND	18		SM30000D-1.5	60		URVFWM	13	
MT6	45, 50			PW1300-SQR	18		SM30000L	60		W		
MT12	45, 50			R			SM30000L-1.5	60			WCK01	144
MT24	45				R10112		13	SMD5000			60	WCK02
MT45	45				RFRB	56	SMD7500	60	WFV1		14	
MTFC	45, 50				RFS	14	SMD7500	60	WFV2		14	
MTP110	55				RFS2	14	SPT5	47, 50			WFV3	14
O					RMT	55, 58	SPT9	47, 50				
	OFF9		13			RWT50KL	6, 13	SPT12	47, 50			
	OFF10		13			RWT200	6, 13	SPTA	47, 50			
	OFP		13			RWT600	6, 7, 13	SPTAL	47, 50			
	OS9		13			RWT1000	6, 13	SSBV1	14			



Together we
hold the future.

→ 1800 062 064
→ polymaster.com.au

Follow us: Polymaster Group

Version 1

