

Polymaster



→ [polymaster.com.au](http://polymaster.com.au)

# Right Tank For You

SLIMLINE TANKS

ROUND TANKS

UNDERGROUND TANKS

SEPTIC TANKS

RETENTION & DETENTION TANKS

# Why Choose Polymaster?



## PRODUCT CERTIFICATION

to the Rainwater tank Standard AS/NZS 4766:2006 for peace of mind. Licence no. BMP657671 & BMP650824



## UV+ DOUBLE STRENGTH

Our exclusive UV+ double strength resin gives the best protection against Australia's harsh sun



## FOOD GRADE

Our tanks are made from food-grade polyethylene and certified to AS/NZS4020, the Australian Standard for drinking water



## QUALITY ASSURANCE

Polymaster only produces quality products and service, certifying us for the international standard for quality management ISO9001



## EXTRA THICK WALLS

Each Polymaster tank undergoes ultrasonic thickness testing and impact testing to ensure material is correct thickness



## FITTINGS STANDARD

Rainwater Tanks come standard with fittings. Ask us what fittings come with the tank model you are interested in



## ONE PIECE TANK CONSTRUCTION

With no joins or seams, our new generation roof design eliminates the need for an internal support pole



## BPA FREE

For your peace of mind



## MADE IN AUSTRALIA

Family-owned and operated here in Australia since 1994



## WATERGUARD AVAILABLE

New technology with Sanitized® protection to keep your water fresher for longer. See pg.4

## 01

### Why buy a tank?

Reduce your water bill by catching rainwater in a Polymaster tank & using it for many applications



## 02

### Choose your tank

Follow our easy steps to find the right tank for you

#### Slimline Tanks 600 – 5000ltr

- Suburban homes
- Ideal for tight spaces
- Watering the garden/lawn
- Flushing the toilet

#### Small Round Water Tanks 200 – 7000ltr

- Suit small urban properties
- Watering the garden/lawn
- Flushing the toilet

#### Large Round Water Tanks 9000 – 50,000ltr

- Suit large rural properties
- Watering the garden/lawn
- Flushing the toilet
- Washing clothes
- Bathing & showering

#### Underground Tanks 3300 & 5000ltr

- Ideal when you don't have the room above ground
- You don't want to see the tank
- Watering the garden/lawn
- Flushing the toilet

## 03

### Where to buy?

Polymaster tanks are available at hardware & plumbing stores, and rural merchandise stores. Or contact us to find your local distributors 1800 062 064

# Slendastyle™ Tanks

The Slendastyle™ range provides slim-profile water storage options up to 5000L

## Premium range



## PolyChoice



| Features                     | Premium Range                     | POLYCHOICE                      |
|------------------------------|-----------------------------------|---------------------------------|
| Available colours            | 22 Colorbond® colours             | 12 Standard Colorbond® colours* |
| Warranty                     | 10 year warranty                  | 7 year warranty                 |
| Sizes available              | 600, 1050, 2000, 3000 & 5000 ltrs | 2000 & 3000 ltrs                |
| Fittings included            |                                   |                                 |
| - 90mm overflow              | ✓                                 | ✓                               |
| - 25mm outlet                | ✓                                 | ✓                               |
| - 25mm ball valve            | ✓                                 | ✗                               |
| - Mosquito proof mesh screen | ✓                                 | ✓                               |
| Fits through a doorway       | 600, 1050, 2000 ltr models        | 2000 ltr model                  |

→ See specs page 12

\* 5% surcharge on the optional colour range

## PUMP OPTIONS

\* Manufacturer's warranty on pumps

### 1 Submersible pump system

→ See page 12



### 2 Packaged pump unit

→ See page 9



→ PH400 OR PH550

### 3 40lpm garden pump systems

→ See page 12



# Tank & Pump Package - 2020L

Achieve a 6 star energy rating with our tank & pump combination on new home builds



Connects directly to house



Easy to install in 10 minutes

**2 PUMP OPTIONS**  
- Single Storey  
- Multi Storey

No need to bolt separate pump & cover to slab

## STANDARD FITTINGS



Pump pre-installed with rain/mains changeover



Flexible hoses for quick connection



Leaf & mosquito proof mesh screen



2 x Large 90mm overflows (1 each end) + 1 cap



2 x 25mm outlets (1 each end) + 1 plug



Door to conceal pump

→ Available in 12 Standard Colorbond® colours  
→ See specs page 13

## Antibacterial Protection



**WATER GUARD**

Waterguard is available on all domestic rainwater tanks → See specs page 13

Introducing Waterguard, Australia's only antimicrobial poly rainwater tank!

**Creating fresher, cleaner water for you and your family**

**NEW INNOVATION**



Reduces Odours



Reduces Bacteria



6 Star Energy Rating



Safely Treated with Antimicrobial Technology



Better for the Environment




Australian Made



BPA FREE



Antimicrobial Water Tank

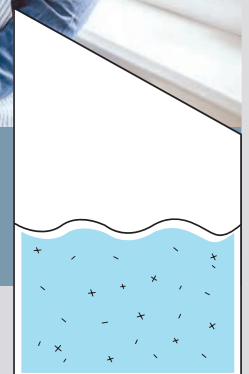

Regular Untreated Water Tank

\* For illustrative purposes only



# Round Tanks

Self-supporting roofs - stylish design



\* PCR Range

\* RWT Range

## Small 200 - 7,000ltr



## Large 9,000 - 50,000ltr



→ RWT range available in 22 Colorbond® colours

→ PCR range available in 12 Standard Colorbond® colours  
- Other colours available on request at 5% surcharge

→ See specs page 14-15



Mosquito proof leaf screen



Moulded lugs for easy lifting and tie-down points




90mm Overflow fitting



Solid Brass Threaded Outlet & Ball Valve [RWT range]

Large Tanks - 40mm  
Small Tanks - 25mm




Solid Brass Threaded Outlet [PCR range]

# Underground Water Tanks



Packages include vortex filter + pump

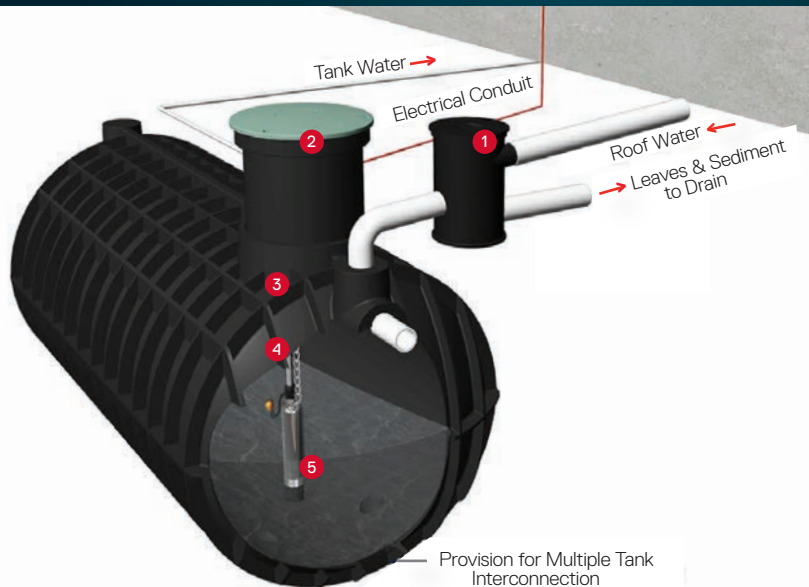

- 1 Vortex filter
  - 2 Tank lid riser (cut to height)
  - 3 3300ltr or 5000ltr underground tank
  - 4 Internal pipe work supplied
  - 5 Submersible pump with 10 mtr cable
- See specs page 15



- Shallow excavators
- One-piece tank (pre-assembled)
- Extremely tough (engineered for high traffic areas)
- Self-anchoring - no concrete required
- Dual pump option available
- Multi tank connections point

# Retention & Detention Tanks

Comply with council regulations

## WHAT ARE RETENTION - DETENTION TANKS?


Retention and Detention tanks are often prescribed by councils and government bodies to control the release of water into the stormwater system.

By installing a Polymaster Retention or Detention tank in sub-divisions and urban areas, you can both protect the drainage system and comply with local council regulations.

## CONTROLLED RELEASE OUTLETS

Polymaster offer a wide range of specialised outlets for this purpose. See available options online at [polymaster.com.au](http://polymaster.com.au)

AVAILABLE ON ALL POLYMASTER TANKS

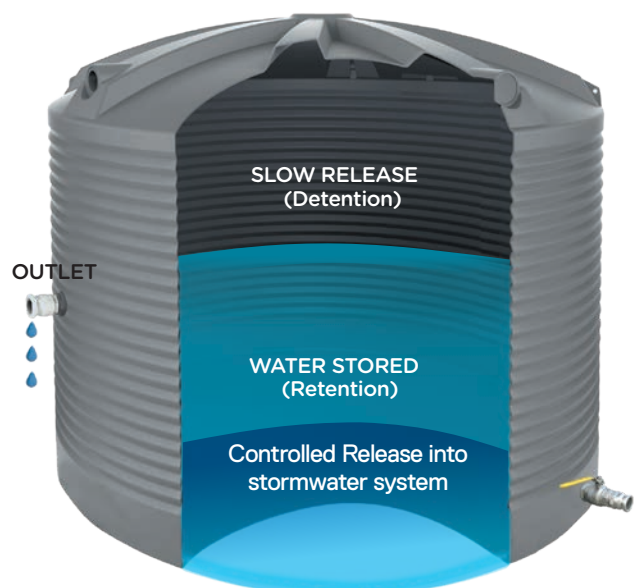

# Septic Tanks


DESIGN LIFE OF 15 YEARS

Approved VIC, SA & NSW



BSI Certified Product

AS/NZS  
1546.1:2008  
BMP 650823  
Australian/New  
Zealand Standards

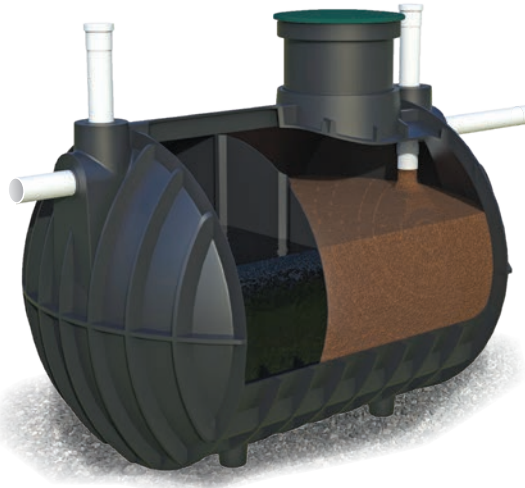

Inlet and outlet fittings come pre-assembled for a 10 minute hook-up



500mm extension available (URRM)






Heavy duty lid tested to 500kg loading

## HOOK UP IN ONLY 10 MINUTES!

- Fittings and baffle are pre-installed
- Australian manufactured, offering you maximum support and service
- Self-anchoring, does not require concrete
- Low profile design - minimal excavation depth
- See specs page 15



## Compare the Difference

| SEPTIC TANK FEATURES  | <div>  <span>VS</span>  <span>VS</span>  </div> |            |          |
|---|---|------------|----------|
|   | POLYMASTER  | OTHER POLY | CONCRETE |
| Pre-assembled fittings and baffle   | ✓   | ✗          | ✓        |
| 10 minute hook-up time  | ✓   | ✗          | ✗        |
| Lightweight   | ✓   | ✓          | ✗        |
| Transport to site on a standard ute with drop sides and lift into position with a small excavator | ✓   | ✓          | ✗        |
| Only small installation machinery required. Suits limited access sites                            | ✓   | ✓          | ✗        |
| No expensive crane required   | ✓   | ✓          | ✗        |
| Extremely tough and durable design, can withstand knocks and bumps during installation            | ✓   | ✗          | ✗        |
| Small diameter riser = much easier to fit   | ✓   | ✗          | ✗        |
| 500kg load-rated manhole cover with tamper-proof bolts. Easy to seal against water ingress        | ✓   | ✗          | ✗        |
| Unique design, self-anchored - no concrete required   | ✓   | ✗          | ✓        |
| Low profile tanks = easier to install in rocky & higher water table conditions                    | ✓   | ✗          | ✗        |




# Tank Accessories & Pumps

Polymaster offers a full range of tank accessories and pumps for all applications.

## Protection / Inspection Covers

An inspection cover is available as an option for every size tank.

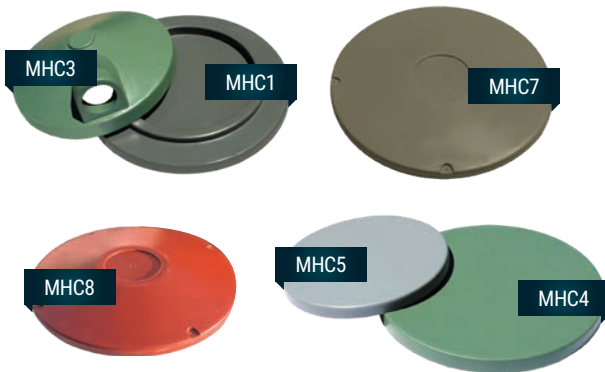

| CODE   | DESCRIPTION   |
|--------|---|
| MHC1   | Suits 600mm inspection opening (13,600 to 31,700L corrugated tanks)       |
| MHC3   | Suits all 400mm openings, Inlet pipe entry point                          |
| MHC4   | Suits 400mm opening (RWT9000, RWT7100, RWT5000, RWT4500 & RWT2270LP only) |
| MHC5   | Suits 300mm inspection opening  |
| MHC6   | Suits all 200mm openings  |
| MHC7   | Suits PCR tanks with 400mm opening  |
| MHC8   | Suits SLST1050, SLST2000, SLST3000 & SLST5000 tanks                       |
| MHC9   | Suits SLST600 tanks only  |
| MHCA   | Suits PolyChoice large tanks and RWT50KL tanks                            |
| PLC101 | 10" carbon filter cartridge   |
| NCP20  | 20" carbon filter cartridge   |

## Tank Stands



→ See table p.21


## Vortex Water Filters - for Polymaster Underground Tanks

Fitted to a horizontal drain pipe, it filters and diverts the rainwater to a storage tank.




→ Self Cleaning -

captures more than 90% of water while cleaning your filter as well

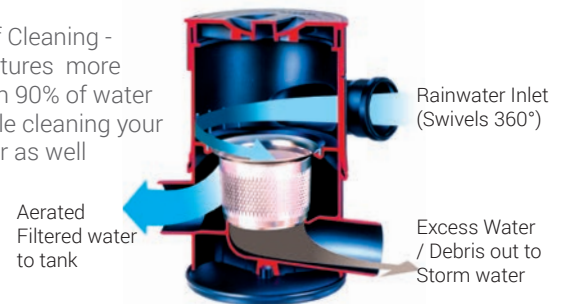


| CODE   | DESCRIPTION  |
|--------|--|
| URVF01 | Vortex filter - for roof areas up to 200sq metres  |
| URVF15 | Vortex filter - for roof areas up to 500sq metres  |
| URVF30 | Vortex filter - for roof areas up to 3000sq metres |

## Water Diverter



1



2

## How It Works

1. First flush of contaminated water is diverted into chamber
2. Once chamber is full fresh water flows to tank



## Water Level Indicators



→ Levetator

→ Liquidator

→ Dipstik


NEW

## Clock Level Gauge

- Rainwater tanks only
- UV - resistant material
- Adjustable tank height up to 270cm
- Flange mounting and 1½" BSP connection
- Approved for drinking water applications
- Precision mechanism



## Leaf Guards

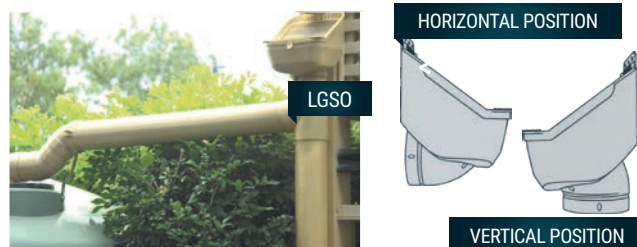

- Swivel outlet fits under gutter to prevent leaves from entering downpipe.
- UV resistant material
- Leaves blow off when dry
- Stainless steel internal screen
- Outlet can be Horizontal or Vertical

| CODE   | DESCRIPTION  |
|--------|--|
| LT01   | Levetator - shows the actual water level. Trouble free use - Aluminium, Stainless Steel and treated cord. In operation since 1985. |
| LQ01   | Liquidator - Ideal for chemical and liquid fertiliser tanks, only float in contact with liquid. (Pole not included)                |
| DPK1   | Dipstik - protrudes above roof / 360° all round visibility   |
| CLG    | Clock level gauge  |
| LGSO   | Leaf guard - swivel outlet   |
| LWD    | Leaf eater water diverter  |
| SSTS6  | 600ltr Slendastyle™ tank stand 1210L x 650W x 520H   |
| SSTS10 | 1,050ltr Slendastyle™ tank stand 1450L x 700W x 520H   |
| TS600  | 600ltr round tank stand 885W x 520H  |
| TS1000 | 1,000ltr round tank stand 1055W x 520H   |

## Pumps and Pump Covers



- A large range of quality pumps available for all tank needs
- Pump covers available in 22 colours to house and protect pumps
- Manufacturer's warranty on pumps



| CODE     | DESCRIPTION   |
|----------|---|
| SMHP45   | Onga S/Steel multi-stage pressure switch up to 55lpm                            |
| SMHP55   | Onga S/Steel multi-stage pressure switch up to 65lpm                            |
| SMHP75   | Onga S/Steel multi-stage pressure switch up to 80lpm                            |
| SMHP90   | Onga S/Steel multi-stage pressure switch up to 90lpm                            |
| SMHW35   | Onga 350watt pump with waterswitch for single storey dwellings up to 45lpm      |
| SMHW45   | Onga 450watt pump with waterswitch for multi storey dwellings up to 55lpm       |
| HSM370PC | Hyjet submersible pump  |
| HHR400   | Hyjet 370watt pump for single storey dwellings up to 55lpm with main changeover |
| HHR550   | Hyjet 550watt pump for multi storey dwellings up to 60lpm with main changeover  |
| PC01     | Pump cover 700L x 450W x 560H mm  |
| DHJ600P  | Hyjet garden pump 600watt up to 45lpm   |
| P45AP    | SMHW45 Onga pump & changeover device + pump cover (PC01)                        |
| PH400    | HHR400 Hyjet 370watt pump & changeover device + pump cover (PC01)               |
| PH550    | HHR550 Hyjet 550watt pump & changeover device + pump cover (PC01)               |

# Large Range of Tank Colours

At Polymaster we process our own resin and have developed a beautiful and comprehensive colour range of rainwater tanks. That's why we're the experts in Poly.



## THE STANDARD RANGE

With so many choices of Colorbond® matched hues, we've made it easy to perfectly blend your new tank with your home.

Our Standard Range takes the guesswork out of matching your tank colour with your exterior walls, guttering or roofing. No wonder this range is an Australian favourite.



## THE OPTIONAL RANGE

If you're looking for even more colour choices, you'll find other exciting Colorbond® shades in our Optional Range.

With a little extra imagination you can create a striking visual look in any outdoor space by choosing either a contrasting or complementary colour match.



Contact us to discuss your colour project on  
**1800 062 064**

Colours are shown for illustrative purposes only and may vary. Polymaster will not be held liable for incorrect colour impressions, request your Polymaster colour sample to view colours.

\*Colorbond® and colour names are registered trademarks of Blue Scope Steel Ltd.™ Polymaster tank colours represented match Colorbond® steel colours.

As we process our own resin we are able to offer a vast range of custom colours, available at an additional cost.

# Delivery & Installation

Polymaster's large tanks can be delivered direct to property where there is a properly made road and large turning area available.

It is the owner's responsibility to provide clear access to site, and to secure tank/s left at site. If the driver cannot reach the location, the tank/s will be left at the closest practical position at the driver's discretion.

We endeavour to get the tank as close as possible to the pad, however it is ultimately the purchaser's responsibility to position it perfectly

**ANY DELIVERY CAN BE ARRANGED, CALL US.**

## Free delivery to site:

13,600ltr / 22,500ltr / 31,700ltr & 50,000ltr  
(remote areas excl.)

## Free to store:

All other tanks (most areas)

## INSTALLATION GUIDE

Entry to tank is not required when installing a Polymaster tank!

- The tank site must be firm, level and flat.
- A well compacted sand base or other consolidated fill such as crushed dust is recommended. This fill must be free of any rocks, stones or any sharp objects. The base must be 75mm – 100mm deep and at least 600mm larger in diameter than the tank base. The outside of the base must be supported by a retaining wall to prevent erosion.
- The overflow must be piped well clear of the tank to avoid any undermining of the tank base.
- Ensure that a flexible hose of at least 300 mm (12") is installed after the tank valve to absorb any shocks or movement.
- If tank is placed on a stand, support pipework off the stand, never support pipework off the tank.

## DELIVERY REQUIREMENTS

Clearance required for truck and trailer is 19 metres long, 5 metres high, 3.5 metres wide.

- In accordance with OH&S requirements, the customer must be present at the time of delivery. If this is not possible, arrangement must be made with the distributor, friends or neighbours to ensure truck driver will have the necessary assistance as listed below.
- A minimum of three able bodied persons to help the driver place tanks 13,600 ltr and larger. This is to be arranged by the customer receiving the tank/s.
- Underground tanks will require a lifting device (forklift etc) to unload. This is not supplied by the driver.

## FREIGHT DETAILS

- Polymaster offers free delivery to site in Victoria and parts of South Australia and New South Wales for: 13,600ltr -50,000ltr tanks (remote areas excluded). For all other tanks, delivery is free to store.
- PolyChoice tanks are delivered free to selected areas. A delivery charge will be incurred for all other areas. Please contact us for delivery eligibility.
- Slendastyle™ tanks are delivered free to store & free to selected areas. Please contact us for more details.

## TANK INSTALLATION

1. Inlet strainer.
2. Pipe overflow away from tank base.
3. Brass Outlet and Ball Valve.
4. Use 300 mm flexible hose from outlet.
5. Tank base to be concrete pad or sand.



→ A full installation guide will be provided upon delivery of tank.

Note: Failure to properly install tank as per instructions will void warranty. Never enter a tank alone. Have an attendant stand by. Restricted Space - only enter after carrying out a Hazard Identification Risk Assessment (H.I.R.A.).

# Slendastyle™ Tanks

## SLENDASTYLE TANK STANDARD FITTINGS



1 Leaf & mosquito proof mesh screen




2 Large 90mm overflow



3 25mm solid brass outlet & ball valve [SLST Range]

## FITTING POSITIONS

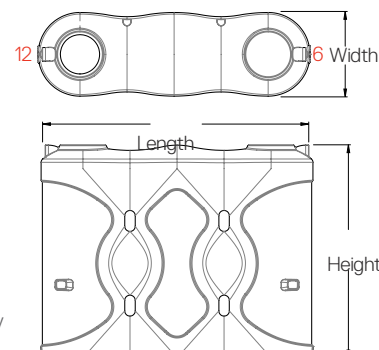

All measurements are approximate due to variable shrinkage during manufacture. Due to pigment variations with raw material manufacturers, colour shades may vary. Polymaster takes no responsibility for the quality of water held in a tank. \*Free delivery only applies to some regions and tank sizes.

## Premium Slendastyle™ Tanks

| CODE     | LITRES | DIMENSIONS (mm)       | OVERFLOW POSITION   | OUTLET POSITION     | SIEVE POSITION      |
|----------|--------|-----------------------|---------------------|---------------------|---------------------|
| SLST600  | 600    | 1220L x 580W x 1265H  | 12:00 Std /6:00 Alt | 6:00 Std /12:00 Alt | 6:00 Std /12:00 Alt |
| SLST1050 | 1050   | 1460L x 690W x 1515H  | 12:00 Std /6:00 Alt | 6:00 Std /12:00 Alt | 6:00 Std /12:00 Alt |
| SLST2000 | 2000   | 2370L x 600W x 2010H  | 12:00 Std /6:00 Alt | 6:00 Std /12:00 Alt | 6:00 Std /12:00 Alt |
| SLST3000 | 3000   | 2570L x 790W x 2050H  | 12:00 Std /6:00 Alt | 6:00 Std /12:00 Alt | 6:00 Std /12:00 Alt |
| SLST5000 | 5000   | 3290L x 1020W x 2010H | 12:00 Std /6:00 Alt | 6:00 Std /12:00 Alt | 6:00 Std /12:00 Alt |

### WITH OPTION 1 - SUBMERSIBLE PUMP

| CODE       | DESCRIPTION                      |
|------------|----------------------------------|
| SLST1050AP | 1050 ltr Tank + Submersible Pump |
| SLST2000AP | 2000 ltr Tank + Submersible Pump |
| SLST3000AP | 3000 ltr Tank + Submersible Pump |
| SLST5000AP | 5000 ltr Tank + Submersible Pump |

### WITH OPTION 3 - GARDEN PUMP

| CODE        | DESCRIPTION                 |
|-------------|-----------------------------|
| SLST1050GPS | 1050 ltr Tank + Garden Pump |
| SLST2000GPS | 2000 ltr Tank + Garden Pump |
| SLST3000GPS | 3000 ltr Tank + Garden Pump |
| SLST5000GPS | 5000 ltr Tank + Garden Pump |

Please specify which pump system you require at time of order.

## PolyChoice Slimline Tanks

| CODE     | DIMENSIONS (mm)      | LITRES | OVERFLOW POSITION  | OUTLET POSITION, SIZE    | SIEVE POSITION     |
|----------|----------------------|--------|--------------------|--------------------------|--------------------|
| PCST2000 | 2370L x 600W x 2010H | 2000   | 12:00 Std/6:00 Alt | 6:00 Std/12:00 Alt, 25mm | 6:00 Std/12:00 Alt |
| PCST3000 | 2570L x 790W x 2050H | 3000   | 12:00 Std/6:00 Alt | 6:00 Std/12:00 Alt, 25mm | 6:00 Std/12:00 Alt |

### WITH OPTION 1 - SUBMERSIBLE PUMP

| CODE       | DESCRIPTION                      |
|------------|----------------------------------|
| PCST2000AP | 2000 ltr tank + Submersible Pump |
| PCST3000AP | 3000 ltr tank + Submersible Pump |

### POLYCHOICE TANK STANDARD FITTINGS



1 Leaf & mosquito proof mesh screen



2 Large 90mm overflow



3 25mm solid brass outlet [PCST Range]




# Tank & Pump Package - 2020L

| CODE       | TANK DESCRIPTION  | DIMENSIONS (mm)      | PUMP WITH RAIN/MAINS CHANGEOVER DEVICE          |
|------------|-------------------|----------------------|---|
| BSLT2020H4 | 2020L Tank & Pump | 2105L x 735W x 2010H | Hyjet 370 watt pump for single storey dwellings |
| BSLT2020H5 | 2020L Tank & Pump | 2105L x 735W x 2010H | Hyjet 550 watt pump for multi storey dwellings  |



Pump installed with rain/mains changeover (sits behind door)

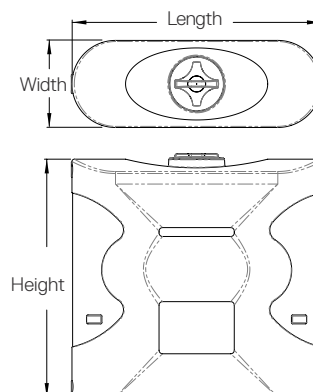

## Waterguard Tanks



### ROUND RAINWATER TANKS

| CODE     | LITRES          | DIAMETER | INLET HEIGHT | OVERALL HEIGHT | STRAINER (POSITION, SIZE) | OVERFLOW (ALTERNATIVE)     | OUTLET (Std) (POSITION, SIZE) |
|----------|-----------------|----------|--------------|----------------|---------------------------|----------------------------|-------------------------------|
| WG200    | 200             | 600 mm   | 900 mm       | 900 mm         | Centre, 200 mm            | 12                         | 6, 25 mm                      |
| WG600    | 600             | 1000 mm  | 950 mm       | 950 mm         | Centre, 200 mm            | 12                         | 6, 25 mm                      |
| WG1000   | 1000            | 1000 mm  | 1500 mm      | 1500 mm        | Centre, 200 mm            | 12                         | 6, 25 mm                      |
| WG1600   | 1600            | 1250 mm  | 1500 mm      | 1610 mm        | 12, 300 mm                | 4 / 11                     | 6, 25 mm                      |
| WG2270T  | 2270Tall        | 1300 mm  | 1920 mm      | 2000 mm        | 12, 300 mm                | 5 / 11                     | 6, 25 mm                      |
| WG2270LP | 2270Low Profile | 1700 mm  | 1200 mm      | 1310 mm        | 12, 400 mm                | 4 / 11                     | 6, 25 mm                      |
| WG3300   | 3300            | 1520 mm  | 2000 mm      | 2100 mm        | 12, 300 mm                | 4 / 11                     | 6, 25 mm                      |
| WG4500T  | 4500Tall        | 1700 mm  | 2100 mm      | 2200 mm        | 12, 400 mm                | 4 / 11                     | 6, 25 mm                      |
| WG4500LP | 4500Low Profile | 2150 mm  | 1380 mm      | 1580 mm        | 12, 400 mm                | 3 / 7 / 11                 | 6, 25 mm                      |
| WG5000   | 5000            | 1950 mm  | 1960 mm      | 2170 mm        | 12, 400 mm                | 3 / 7 / 11                 | 6, 25 mm                      |
| WG7100   | 7100            | 2150 mm  | 2120 mm      | 2300 mm        | 12, 400 mm                | 3 / 7 / 11                 | 6, 40 mm                      |
| WG9000   | 9,000           | 2500 mm  | 2050 mm      | 2260 mm        | 12, 400 mm                | 2.30 / 5.30 / 8.30 / 11.30 | 6, 40 mm                      |



### SLIMLINE RAINWATER TANKS

| CODE   | LITRES | DIMENSIONS (mm)      | OVERFLOW POSITION    | OUTLET POSITION      | SIEVE POSITION       |
|--------|--------|----------------------|----------------------|----------------------|----------------------|
| WG2000 | 2000   | 2370L x 600W x 2010H | 12:00 Std / 6:00 Alt | 6:00 Std / 12:00 Alt | 6:00 Std / 12:00 Alt |
| WG3000 | 3000   | 2570L x 790W x 2050H | 12:00 Std / 6:00 Alt | 6:00 Std / 12:00 Alt | 6:00 Std / 12:00 Alt |

### 2020L SLIMLINE TANK & PUMP PACKAGE

| CODE     | TANK DESCRIPTION  | DIMENSIONS (mm)      | PUMP WITH RAIN/MAINS CHANGEOVER DEVICE          |
|----------|-------------------|----------------------|---|
| WG2020H4 | 2020L Tank & Pump | 2105L x 735W x 2010H | Hyjet 370 watt pump for single storey dwellings |
| WG2020H5 | 2020L Tank & Pump | 2105L x 735W x 2010H | Hyjet 550 watt pump for multi storey dwellings  |

# Round Rainwater Tanks

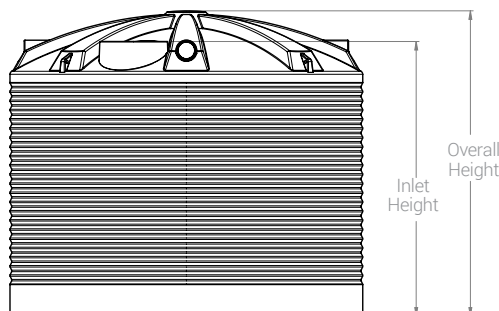

## TANK ROOF DIAGRAM FOR FITTING POSITIONS

Please see table and diagram to choose your preferred overflow and outlet positions. Brass outlets can be placed anywhere on flat skirt of tank.

\* Refer to table for strainer, overflow & outlet positions available for each tank size below

## Small Tanks 200 - 7,000ltr

### RWT - RAINWATER TANKS (CORRUGATED)

| CODE      | LITRES          | DIAMETER | INLET HEIGHT | OVERALL HEIGHT | STRAINER (POSITION, SIZE) | OVERFLOW (ALTERNATIVE) | OUTLET (Std) (POSITION, SIZE) |
|-----------|-----------------|----------|--------------|----------------|---------------------------|------------------------|-------------------------------|
| RWT200    | 200             | 600 mm   | 900 mm       | 900 mm         | Centre, 200 mm            | 12                     | 6, 25 mm                      |
| RWT600    | 600             | 1000 mm  | 950 mm       | 950 mm         | Centre, 200 mm            | 12                     | 6, 25 mm                      |
| RWT1000   | 1000            | 1000 mm  | 1500 mm      | 1500 mm        | Centre, 200 mm            | 12                     | 6, 25 mm                      |
| RWT1600   | 1600            | 1250 mm  | 1500 mm      | 1610 mm        | 12, 300 mm                | 4 / 11                 | 6, 25 mm                      |
| RWT2270T  | 2270Tall        | 1300 mm  | 1920 mm      | 2000 mm        | 12, 300 mm                | 5 / 11                 | 6, 25 mm                      |
| RWT2270LP | 2270Low Profile | 1700 mm  | 1200 mm      | 1310 mm        | 12, 400 mm                | 4 / 11                 | 6, 25 mm                      |
| RWT3300   | 3300            | 1520 mm  | 2000 mm      | 2100 mm        | 12, 300 mm                | 4 / 11                 | 6, 25 mm                      |
| RWT4500T  | 4500Tall        | 1700 mm  | 2100 mm      | 2200 mm        | 12, 400 mm                | 4 / 11                 | 6, 25 mm                      |
| RWT4500LP | 4500Low Profile | 2150 mm  | 1380 mm      | 1580 mm        | 12, 400 mm                | 3 / 7 / 11             | 6, 25 mm                      |
| RWT5000   | 5000            | 1950 mm  | 1960 mm      | 2170 mm        | 12, 400 mm                | 3 / 7 / 11             | 6, 25 mm                      |
| RWT7100   | 7100            | 2150 mm  | 2120 mm      | 2300 mm        | 12, 400 mm                | 3 / 7 / 11             | 6, 40 mm                      |

### PCR - RAINWATER TANKS (SMOOTH WALL)

| CODE    | LITRES | DIAMETER | INLET HEIGHT | OVERALL HEIGHT | STRAINER (POSITION, SIZE) | OVERFLOW (ALTERNATIVE)     | OUTLET (Std) (POSITION, SIZE) |
|---------|--------|----------|--------------|----------------|---------------------------|----------------------------|-------------------------------|
| PCR2000 | 2000   | 1175 mm  | 2185 mm      | 2255 mm        | 12, 300 mm                | 1.30 / 4.30 / 7.30 / 10.30 | 6, 25 mm                      |
| PCR4000 | 4000   | 1600 mm  | 2150 mm      | 2200 mm        | 12, 400 mm                | 1.30 / 4.30 / 7.30 / 10.30 | 6, 25 mm                      |
| PCR5000 | 5000   | 1800 mm  | 2120 mm      | 2200 mm        | 12, 400 mm                | 1.30 / 4.30 / 7.30 / 10.30 | 6, 25 mm                      |
| PCR7000 | 7000   | 2200 mm  | 2020 mm      | 2200 mm        | 12, 400 mm                | 1.30 / 4.30 / 7.30 / 10.30 | 6, 25 mm                      |

## Large Tanks 9,000 - 50,000ltr

### RWT - RAINWATER TANKS (CORRUGATED & SMOOTH WALL)


| CODE     | LITRES | DIAMETER | INLET HEIGHT | OVERALL HEIGHT | STRAINER (POSITION, SIZE) | OVERFLOW (ALTERNATIVE)     | OUTLET (Std) (POSITION, SIZE) |
|----------|--------|----------|--------------|----------------|---------------------------|----------------------------|-------------------------------|
| RWT9000  | 9,000  | 2500 mm  | 2050 mm      | 2260 mm        | 12, 400 mm                | 2.30 / 5.30 / 8.30 / 11.30 | 6, 40 mm                      |
| RWT13600 | 13,600 | 3100 mm  | 2100 mm      | 2450 mm        | 12, 400 mm                | 2 / 5 / 8 / 11 /           | 4, 40 mm                      |
| RWT22500 | 22,500 | 3560 mm  | 2470 mm      | 2800 mm        | 12, 400 mm                | 2.30 / 5.30 / 8.30 / 11.30 | 4, 40 mm                      |
| RWT31700 | 31,700 | 4100 mm  | 2610 mm      | 3040 mm        | 12, 400 mm                | 2.30 / 5.30 / 8.30 / 11.30 | 4, 40 mm                      |
| RWT50KL  | 50,000 | 4600 mm  | 3290 mm      | 3440 mm        | 12/6, 500 mm              | 2 / 4 / 6 / 8 / 10 / 12    | 4, 40 mm                      |

## PCR - RAINWATER TANKS (SMOOTH WALL)

| CODE     | LITRES | DIAMETER | INLET HEIGHT | OVERALL HEIGHT | STRAINER (POSITION, SIZE) | OVERFLOW (ALTERNATIVE)     | OUTLET (Std) (POSITION, SIZE) |
|----------|--------|----------|--------------|----------------|---------------------------|----------------------------|-------------------------------|
| PCR10000 | 10,000 | 2480 mm  | 2170 mm      | 2350 mm        | 12, 400 mm                | 1.30 / 4.30 / 7.30 / 10.30 | 6, 40 mm                      |
| PCR13500 | 13,500 | 2830 mm  | 2470 mm      | 2630 mm        | 12, 500 mm                | 1.30 / 4.30 / 7.30 / 10.30 | 6, 40 mm                      |
| PCR22500 | 22,500 | 3573 mm  | 2559 mm      | 2879 mm        | 12, 500 mm                | 1.30 / 4.30 / 7.30 / 10.30 | 6, 40 mm                      |
| PCR27000 | 27,000 | 3573 mm  | 3019 mm      | 3339 mm        | 12, 500 mm                | 1.30 / 4.30 / 7.30 / 10.30 | 6, 40 mm                      |


## Underground Tanks

| CODE     | CAPACITY  | DIMENSIONS (mm)       |
|----------|-----------|-----------------------|
| URT3300B | 3,300 Ltr | 2450L x 1640W x 2165H |
| URT5000B | 5,000 Ltr | 3520L x 1640W x 2165H |

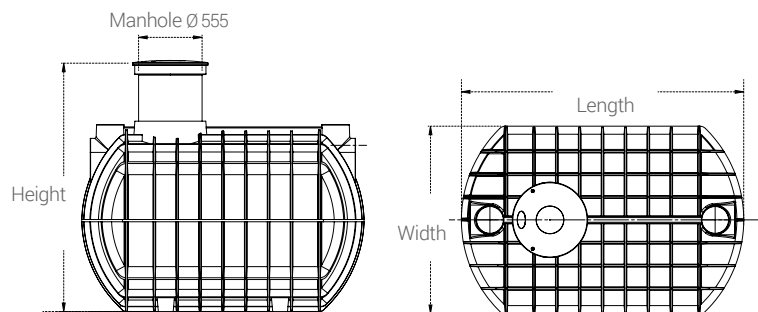


## Septic Tanks


| CODE   | CAPACITY                             | DIMENSIONS (mm)       |
|--------|--------------------------------------|-----------------------|
| ST3100 | 3,100 Ltr                            | 2450L x 1640W x 1665H |
| ST4550 | 4,550 Ltr                            | 3520L x 1640W x 1665H |
| URRM   | Optional riser extension 555W x 500H |                       |

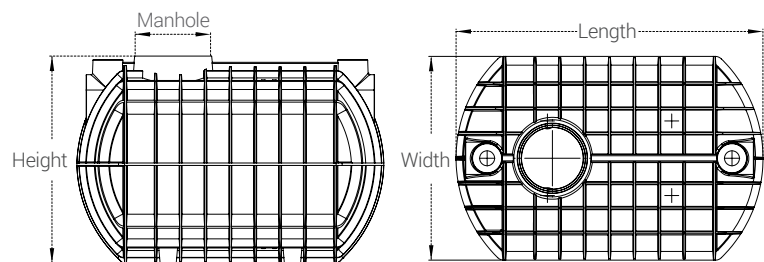


\* Shown without optional riser



**DETAIL A INLET**

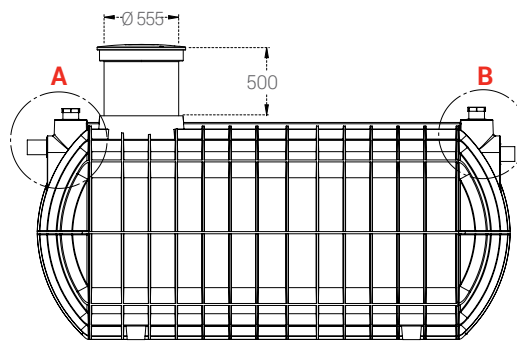

**SHOWN WITH RISER**



**DETAIL B OUTLET**



## SPECIFICATIONS

Due to the variable shrinkage rate of polyethylene, the product dimensions and capacities listed in this catalogue are approximate. Naturally occurring pigment variations in raw materials may also cause some variability in colour shades. While we attempt to come as close to the advertised shades as possible, we are unable to guarantee exact tank colour matches. Due to ongoing improvement and innovation, product details, design and specifications are subject to change without notice.

## EASY RETURNS

If you are not completely satisfied with your Polymaster purchase, simply return the product for credit within 14 days of receipt.

All returns are subject to a 15% restocking fee and freight charges

## COPYRIGHT®

This publication and all information is the property of Polymaster Pty Ltd. No content contained in this publication is to be duplicated or copied in any way or manner.

## PRODUCT SUITABILITY

The product recommendations used in this catalogue are intended only as a guide. While we make every effort to accurately represent the suitability of our products for a variety of uses, your situation may be unique and require additional investigation. Polymaster holds the right to change equipment and accessories in line with ongoing developments and product supply.

## SUSTAINABILITY

At Polymaster, special re-circulated heat processes are used to minimize greenhouse gases, excess materials are fully recycled, and water re-use programs help lessen our impact on Australia's precious natural resources.



SCAN QR TO BROWSE OR VISIT  
**POLYMASTER.COM.AU**

\* E & OE

# Together we hold the future.

**YOUR LOCAL DISTRIBUTOR**

→ 1800 062 064  
→ [polymaster.com.au](https://polymaster.com.au)

Follow us  Polymaster Group

Published 2019