



## Product Guide 2026





# Why choose Polymaster?

At Polymaster, we use only top-grade materials, rigorously trialled and tested throughout the design and manufacturing process. Our products meet global quality and process certifications, ensuring reliability and excellence. Manufactured in our purpose-built facilities, we maintain full control over the entire process, from raw material selection to the final product - guaranteeing superior quality at every stage.



## Manufactured Locally

Australian made & operated since 1994



## Custom Tank Builder

Industry leading technology to put you in control of your tank building journey



## Product Certification

Built to the Rainwater tank Standard AS/NZS 4766:2006 for peace of mind. Licence no. BMP657671 & BMP650824



## Fittings Standard

Rainwater Tanks come standard with fittings. Ask us what fittings come with the tank model you are interested in



## Quality Assurance

Polymaster only produces quality products and service, certifying us for the International Standard ISO9001 for quality management



## One Piece Tank Construction

With no joins or seams, our new generation roof design eliminates the need for an internal support pole



## BPA Free

For your peace of mind



## Messaging Service

Know where your tank is and when to expect its delivery



## Food Grade

Our tanks are made from food-grade polyethylene and certified to AS/NZS4020, the Australian Standard for drinking water



## Extra Thick Walls

Each Polymaster tank undergoes ultrasonic thickness testing and impact testing to ensure material is correct thickness



## UV+ Double Strength

Our exclusive UV+ double strength resin gives the best protection against Australia's harsh sun



## Delivery

Large fleet, fast turn around times & free to many sites. See Delivery & Installation for full details - page 68-69.



## Reliability

Our dedicated drivers and logistics team keep you informed every step of the way, ensuring a smooth delivery process.



## Store Locator

Looking for your nearest store? With our store locator you can find the nearest store to you.



# Contents

## **WATER TANKS**

|                               |    |
|-------------------------------|----|
| Round Water Tanks             | 10 |
| Underground Tanks             | 13 |
| Slimline Tanks & Pump Options | 14 |
| Builders Tanks                | 15 |
| Accessories                   | 16 |
| Water Pumps                   | 18 |

## **SEPTIC TANKS & PUMP WELLS**

|               |    |
|---------------|----|
| Septic Tanks  | 22 |
| Pump Wells    | 23 |
| Pump Stations | 24 |

## **DIESEL TANKS**

|                         |    |
|-------------------------|----|
| Ute Packs               | 28 |
| Single Skin Tanks       | 29 |
| Transfer Tanks          | 30 |
| Trailer Packages        | 31 |
| Self Bunded Tanks       | 32 |
| Dispensing Kits & Pumps | 34 |
| Accessories             | 35 |

## **ADBLUE® TANKS**

|                           |    |
|---------------------------|----|
| Ute Packs & Accessories   | 38 |
| Single Skin Storage Tanks | 39 |
| Self Bunded Tanks         | 40 |

## **FIRE FIGHTING**

|                       |    |
|-----------------------|----|
| Water Cartage Tanks   | 44 |
| Compact Packages      | 45 |
| Skid Mounted Packages | 46 |
| Trailer Packages      | 47 |
| Pumps & Accessories   | 48 |

## **AGRICULTURE & FARMING**

|                                |    |
|--------------------------------|----|
| Liquid Fertiliser Tanks        | 52 |
| Fertiliser Mixing Tanks        | 54 |
| Aquaculture                    | 55 |
| Round Water Troughs            | 56 |
| Long Water Troughs             | 58 |
| Equine                         | 60 |
| Calving & Cattle               | 61 |
| Calving / Lambing Milk Feeders | 62 |
| Footrot Baths                  | 63 |
| Farm Storage & Equipment       | 64 |
| Produce Bins & Liners          | 67 |

## **DELIVERY**

|                         |    |
|-------------------------|----|
| Delivery & Installation | 68 |
|-------------------------|----|






# Water Tanks



# Tank Colours

With so many choices of Colorbond® matched hues, we've made it easy to perfectly blend your new tank with your home or surroundings. This range takes the guesswork out of matching your tank colour with your exterior walls, guttering or roofing. No wonder this range is an Australian favourite.

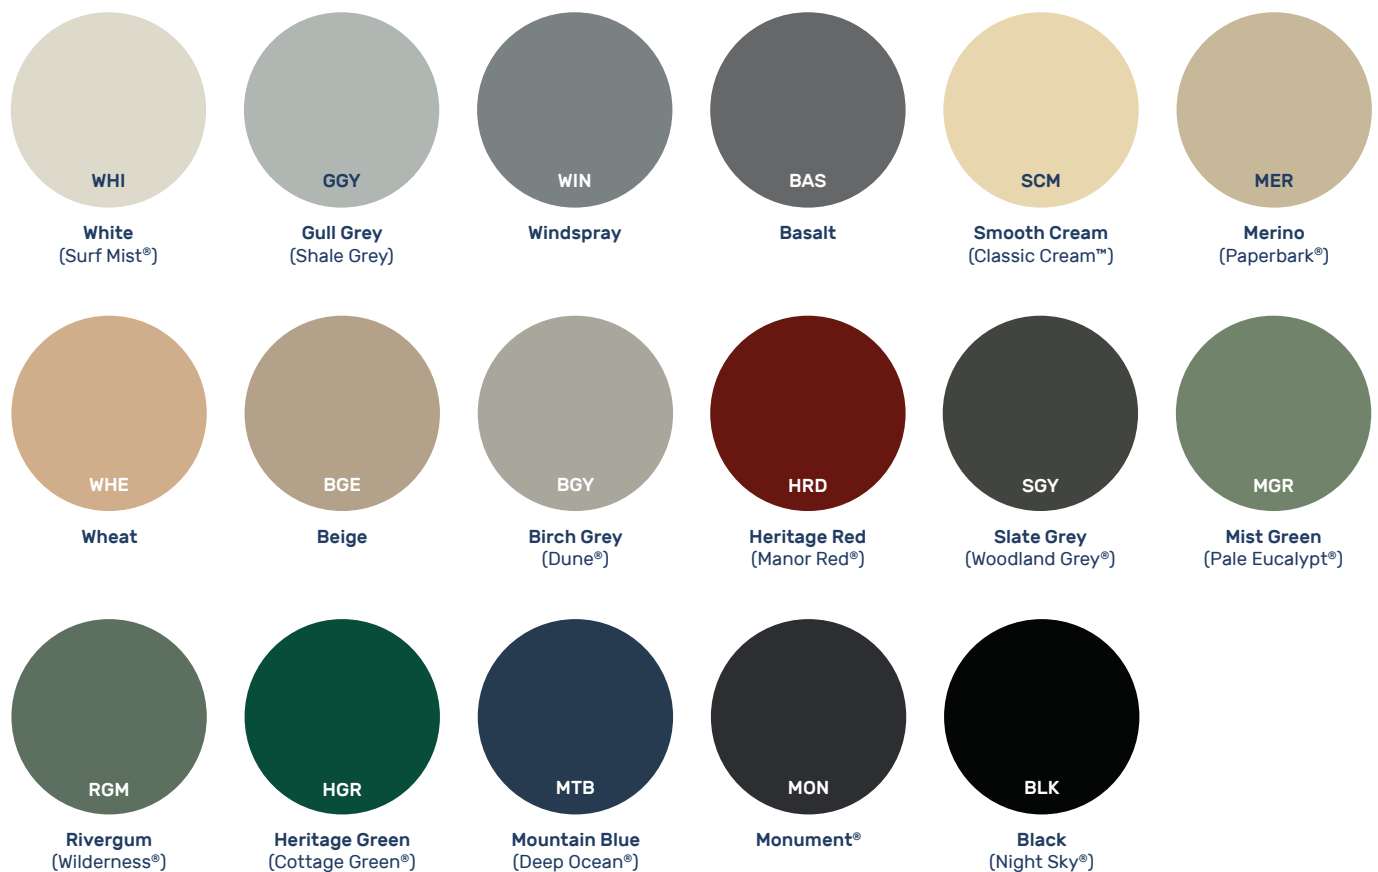

Contact us to discuss your colour project on 1800 062 064. Colours are shown for illustrative purposes only and may vary. Polymaster will not be held liable for incorrect colour impressions. Request your Polymaster colour sample to view colours. \*COLORBOND® and colour names are registered trademarks of Blue Scope Steel Ltd.™ Polymaster tank colours represented match COLORBOND® steel colours. As we process our own resin we are able to offer a vast range of custom colours, available at an additional cost.

# Water Tanks



## Key Features

- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Threaded outlet & ball valve as standard
- Upgraded outlet and ball valves are available at an additional cost
- Certified to AS/NZS 4766:2006 Standard
- Outlet position can be moved from standard based on positions on the 'Fit Out Clock' (below)
- Replacement manhole covers and strainers available
- Available in 17 Colours
- 90mm overflow as standard



Strainer



Overflow



Lifting Lugs





Threaded Outlet



Ball Valve

## Dimensions

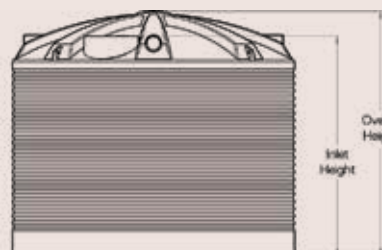

### Fit Out Clock


Refer to table for what overflow positions are available for each tank size.



RWT50KL



RWT31700

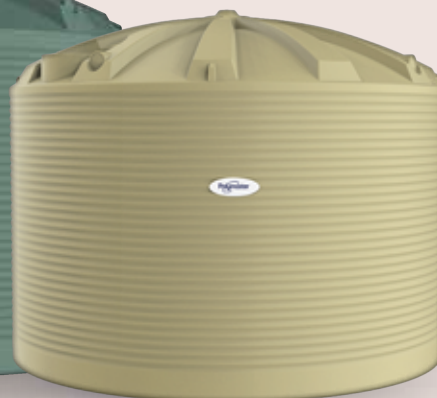

RWT22500

Premium Round Water Tanks

| Code       | Profile    | Capacity (Litres) | Diameter | Overall Height | Inlet Height | Strainer Size | Overflow (Alternative)   | Outlet Size | Upgrade Ball Valve & Outlet           |
|------------|------------|-------------------|----------|----------------|--------------|---------------|--------------------------|-------------|---------------------------------------|
| RWT200     | Corrugated | 200               | 600      | 900            | 900          | 200 (S2)      | 12                       | 25          | 40 - BV1.5A<br>50 - BV2A              |
| RWT600     | Corrugated | 600               | 1000     | 950            | 950          | 200 (S2)      | 12                       | 25          | 40 - BV1.5A<br>50 - BV2A              |
| RWT1000    | Corrugated | 1,000             | 1000     | 1500           | 1500         | 200 (S2)      | 12                       | 25          | 40 - BV1.5A<br>50 - BV2A              |
| RWT1600    | Corrugated | 1,600             | 1250     | 1610           | 1500         | 300 (S3)      | 11/4                     | 25          | 40 - BV1.5A<br>50 - BV2A              |
| RWT2270T*  | Corrugated | 2,270             | 1300     | 2000           | 1920         | 300 (S3)      | 11/5                     | 25          | 40 - BV1.5A<br>50 - BV2A              |
| RWT2270LP* | Corrugated | 2,270             | 1700     | 1310           | 1200         | 400 (S4)      | 11/4                     | 25          | 40 - BV1.5A<br>50 - BV2A              |
| RWT3300    | Corrugated | 3,300             | 1520     | 2100           | 2000         | 300 (S3)      | 11/4                     | 25          | 40 - BV1.5A<br>50 - BV2A              |
| RWT4500T*  | Corrugated | 4,500             | 1700     | 2200           | 2100         | 400 (S4)      | 11/4                     | 25          | 40 - BV1.5A<br>50 - BV2A<br>80 - BV3A |
| RWT4500LP* | Corrugated | 4,500             | 2150     | 1580           | 1380         | 400 (S4)      | 11/3/7                   | 25          | 40 - BV1.5A<br>50 - BV2A<br>80 - BV3A |
| RWT5000    | Corrugated | 5,000             | 1950     | 2170           | 1960         | 400 (S4)      | 11/3/7                   | 25          | 40 - BV1.5A<br>50 - BV2A<br>80 - BV3A |
| RWT7100    | Corrugated | 7,100             | 2150     | 2300           | 2120         | 400 (S4)      | 11/3/7                   | 40          | 50 - BV2A<br>80 - BV3A                |
| RWT9000    | Corrugated | 9,000             | 2500     | 2260           | 2050         | 400 (S4)      | 11.30/2.30/<br>5.30/8.30 | 40          | 50 - BV2A<br>80 - BV3A                |
| RWT13600   | Corrugated | 13,600            | 3100     | 2450           | 2100         | 400 (S4)      | 11/2/5/8                 | 40          | 50 - BV2A<br>80 - BV3A                |
| RWT22500   | Corrugated | 22,500            | 3560     | 2800           | 2470         | 400 (S4)      | 11.30/2.30/<br>5.30/8.30 | 40          | 50 - BV2A<br>80 - BV3A                |
| RWT31700   | Corrugated | 31,700            | 4100     | 3040           | 2610         | 400 (S4)      | 11.30/2.30/<br>5.30/8.30 | 40          | 50 - BV2A<br>80 - BV3A                |
| RWT50KL    | Smooth     | 50,000            | 4600     | 3440           | 3290         | 500 (S5)      | 2/4/6/8/10/12            | 40          | 50 - BV2A<br>80 - BV3A                |

\*T = Tall  
\*LP = Low Profile



# Round Water Tanks



## Key Features

- Outlet standard position is 6 o'clock
- Outlet position can be moved from standard based on positions on the 'Fit Out Clock' (below)
- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Threaded outlet and ball valve as standard
- Upgraded outlet and ball valves are available at an additional cost
- Replacement manhole covers and strainers available
- Available in 17 Colours
- Certified to AS/NZS 4766:2006 Standard



Strainer



Overflow



Lifting Lugs



Threaded Outlet




Ball Valve

## Product Range

| Code     | Profile | Capacity (Litres) | Diameter | Overall Height | Inlet Height | Strainer Size | Overflow (Alternative)  | Outlet Size | Upgrade Ball Valve & Outlet |
|----------|---------|-------------------|----------|----------------|--------------|---------------|-------------------------|-------------|-----------------------------|
| PCR2000  | Smooth  | 2,000             | 1175     | 2255           | 2185         | 300 (S3)      | 10.30, 1.30, 4.30, 7.30 | 25          | 40 - BV1.5A<br>50 - BV2A    |
| PCR4000  | Smooth  | 4,000             | 1600     | 2200           | 2150         | 400 (S4)      | 10.30, 1.30, 4.30, 7.30 | 25          | 40 - BV1.5A<br>50 - BV2A    |
| PCR5000  | Smooth  | 5,000             | 1800     | 2200           | 2120         | 400 (S4)      | 10.30, 1.30, 4.30, 7.30 | 25          | 40 - BV1.5A<br>50 - BV2A    |
| PCR7000  | Smooth  | 7,000             | 2200     | 2200           | 2020         | 400 (S4)      | 10.30, 1.30, 4.30, 7.30 | 25          | 40 - BV1.5A<br>50 - BV2A    |
| PCR10000 | Smooth  | 10,000            | 2480     | 2350           | 2170         | 400 (S4)      | 10.30, 1.30, 4.30, 7.30 | 40          | 50 - BV2A<br>80 - BV3A      |
| PCR13500 | Smooth  | 13,500            | 2830     | 2630           | 2470         | 500 (S5)      | 10.30, 1.30, 4.30, 7.30 | 40          | 50 - BV2A<br>80 - BV3A      |
| PCR22500 | Smooth  | 22,500            | 3573     | 2879           | 2559         | 500 (S5)      | 10.30, 1.30, 4.30, 7.30 | 40          | 50 - BV2A<br>80 - BV3A      |
| PCR27000 | Smooth  | 27,000            | 3573     | 3339           | 3019         | 500 (S5)      | 10.30, 1.30, 4.30, 7.30 | 40          | 50 - BV2A<br>80 - BV3A      |

## Dimensions



### Fit Out Clock

Refer to table for what overflow positions are available for each tank size.



PCR27000

PCR13500

PCR4000

# Underground Tanks



## Key Features

- Child-proof lid secured with tamper proof screws
- Self-anchoring
- Low profile design - minimal excavation required
- Rubber ring seal fitting provided for pipe connection.
- Tank to tank connection point
- Certified to AS/NZS 4766:2006 Standard

## Product Range

| Code         | Description                                                         | Capacity (Litres) | Length | Width | Height |
|--------------|---------------------------------------------------------------------|-------------------|--------|-------|--------|
| URT3300B     | Tank Only                                                           | 3,300             | 2470   | 1640  | 1665   |
| URT5000B     | Tank Only                                                           | 5,000             | 3520   | 1640  | 1665   |
| URT3300VF    | Tank with Vortex Filter                                             | 3,300             | 2470   | 1640  | 1665   |
| URT5000VF    | Tank with Vortex Filter                                             | 5,000             | 3520   | 1640  | 1665   |
| URT3300VF/PC | Tank with Vortex Filter & submersible pump + auto changeover device | 3,300             | 2470   | 1640  | 1665   |
| URT5000VF/PC | Tank with Vortex Filter & submersible pump + auto changeover device | 5,000             | 3520   | 1640  | 1665   |
| URT3300VF/GP | Tank with Vortex Filter & garden pump + press control               | 3,300             | 2470   | 1640  | 1665   |
| URT5000VF/GP | Tank with Vortex Filter & garden pump + press control               | 5,000             | 3520   | 1640  | 1665   |

## Pump Details

| Type                  | Voltage  | Power (KW)         | Head | Flow  | Warranty |
|-----------------------|----------|--------------------|------|-------|----------|
| Submersible Pump (PC) | 220-240v | 0.37kW (370 watts) | 36m  | 82LPM | 2 years  |
| Garden Pump (GP)      | 220-240v | 0.37kW (370 watts) | 36m  | 82LPM | 2 years  |



## Accessories

| Code   | Description                            |
|--------|----------------------------------------|
| URRM   | 500mm Riser - for deeper installations |
| U-LID  | Lid to suit Underground Tanks          |
| LID-CD | Heavy Duty Class D Lid                 |

## Vortex Fine Filter

Self cleaning filter removes sediment and debris, providing you with clean water for storage. Wall mounting bracket available. Example Setup Underground Tank with Vortex Filter and Submersible Pump options:

## Dimensions

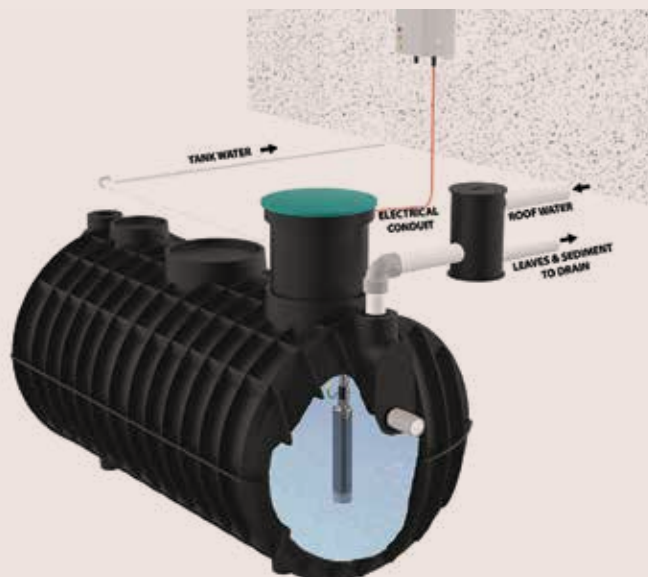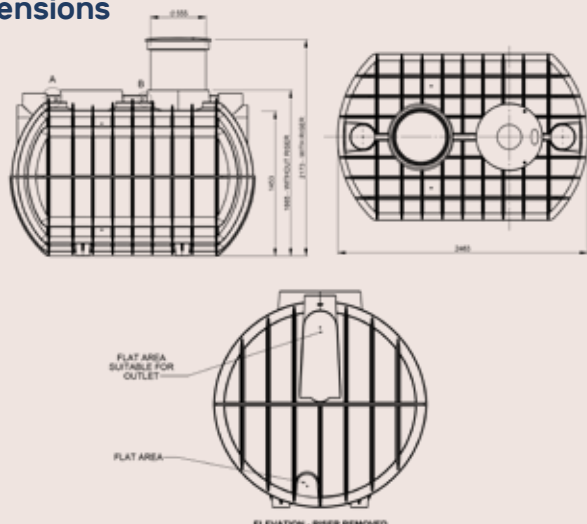

# Slimline Tanks & Pump Options



## Key Features


- Space saving modern design
- 25mm threaded outlet
- Moulded handgrips for easy lifting
- 90mm overflow
- Available in 17 Colours
- Certified to AS/NZS 4766:2006 Standard

## Pump Information

Automatic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

\*Refer to Page 18 for Pump Details.

## Dimensions

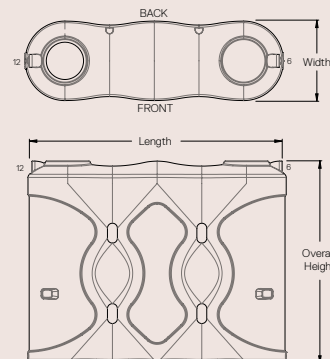

## Product Range

| Tank Only | Tank + Household Pump (HHR-370S-PC) | Tank + Garden Pump (DHJ600) | Capacity | Dimensions (L X W X H) |
|-----------|-------------------------------------|-----------------------------|----------|------------------------|
| PCST600   | -                                   | -                           | 600      | 1220 x 580 x 1265      |
| PCST1050  | PCST1050AP                          | PCST1050GPS                 | 1050     | 1460 x 690 x 1515      |
| PCST2000  | PCST2000AP                          | PCST2000GPS                 | 2000     | 2370 x 600 x 2010      |
| PCST3000  | PCST3000AP                          | PCST3000GPS                 | 3000     | 2570 x 790 x 2050      |
| PCST5000  | PCST5000AP                          | PCST5000GPS                 | 5000     | 3290 x 1020 x 2010     |

\*GPS models include separate pump cover (PC01)

| Capacity (Litres) | Strainer (mm) | Overflow Position | Outlet Position | Outlet Size | Manhole Cover |
|-------------------|---------------|-------------------|-----------------|-------------|---------------|
| 600               | 300 (S3)      | 12 STD / 6 ALT    | 6 STD / 12 ALT  | 25          | MHC9          |
| 1050              | 400 (S4)      | 12 STD / 6 ALT    | 6 STD / 12 ALT  | 25          | MHC8          |
| 2000              | 400 (S4)      | 12 STD / 6 ALT    | 6 STD / 12 ALT  | 25          | MHC8          |
| 3000              | 400 (S4)      | 12 STD / 6 ALT    | 6 STD / 12 ALT  | 25          | MHC8          |
| 5000              | 400 (S4)      | 12 STD / 6 ALT    | 6 STD / 12 ALT  | 25          | MHC8          |



PCST600

PCST1050

PCST2000

PCST3000

PCST5000

# Builders Tanks



## Key Features

- 10 minute quick install - pump built in, just hook it up
- Moulded handgrips for easy lifting
- 2 x 90mm overflows + 1 cap
- 2 x outlets + 1 cap
- Certified to AS/NZS 4766:2006 Standard
- Flexhose 20mm x 600mm female thread
- Hoses for connection at approximately 400mm high
- Available in 17 colours
- Fits through a standard doorway

## Pump Information

Automatic hydraulic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

\*Refer to Page 18 for Pump Details.


## Standard Fittings



Pump pre-installed with rain/mains changeover



Flexible hoses for quick connection



Leaf & mosquito proof mesh screen



2 x Large 90mm overflows (1 each end) + 1 cap



2 x 25mm outlets (1 each end) + 1 plug





Cover to conceal pump

## Builders Tank & Pump Packages

| Code       | Pump Capability         | Capacity (Litres) | Pump Code | Length | Width | Height | Inlet Height | Outlet (Position) | Outlet Size |
|------------|-------------------------|-------------------|-----------|--------|-------|--------|--------------|-------------------|-------------|
| BSLT2020H4 | Single Storey Dwellings | 2,020             | MHR20-370 | 2105   | 735   | 2010   | 2010         | 6&12              | 25          |
| BSLT2020H5 | Double Storey Dwellings | 2,020             | MHR20-550 | 2105   | 735   | 2010   | 2010         | 6&12              | 25          |

| Code       | Description             |
|------------|-------------------------|
| BSLT2020PC | Pump Cover for BSLT2020 |
| MHC8       | Inspection Cover 400mm  |
| S4         | Inlet Strainer 400mm    |

## Dimensions

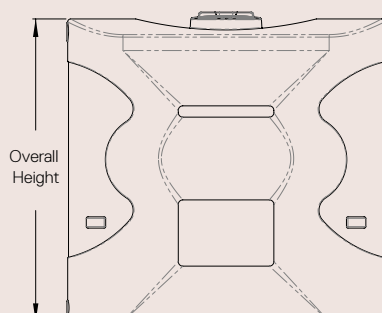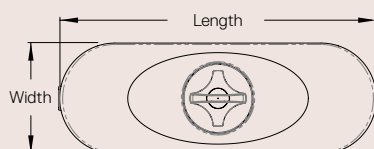

BSLT2020H4

# Accessories

## Inspection Covers

| Code | Description                                                                    |
|------|--------------------------------------------------------------------------------|
| MHC1 | Inspection Cover for 13,600L to 31,700L RWT Tanks                              |
| MHC3 | Water Entry Cover for Tanks with 400mm Sieve                                   |
| MHC4 | Inspection Cover for Tanks with 400mm Sieve                                    |
| MHC5 | Inspection Cover for <b>RWT3300</b> , <b>RWT2270T</b> and <b>RWT1600</b> Tanks |
| MHC6 | Inspection Cover for <b>RWT1000</b> , <b>RWT600</b> and <b>RWT200</b> Tanks    |
| MHC8 | Inspection Cover for Slimline Tanks 1,050L, 2,000L, 3,000L and 5,000L          |
| MHC9 | Inspection Cover for 600L Slimline Tank                                        |
| MHCA | Inspection for 13,500L to 27,000L PCR Tanks + <b>RWT50KL</b>                   |



MHC1

## Water Level Indicators

| Code    | Description                                                 |
|---------|-------------------------------------------------------------|
| DPK1    | Dipstick                                                    |
| DPK1EXT | Dipstick Extension for 50KL Tank                            |
| LT01    | Levetator - Water Level Indicator                           |
| LQ02    | Liquidator - Level Indicator Suitable for Corrosive Liquids |



DPK1

## Other Rainwater Accessories

| Code  | Description                      |
|-------|----------------------------------|
| LGSO  | Leaf Guard - Swivel Outlet       |
| LWD   | Downpipe Water Diverter          |
| OFF9  | 90mm Overflow Flanged            |
| OFF   | Plug To Fit 90mm Overflow        |
| OS9   | 90mm Overflow Screen             |
| OFF10 | 100mm Overflow Flanged           |
| PC01  | Pump Cover 700L x 450W x 560H mm |



LT01

## Underground Tank Accessories

| Code   | Description                            |
|--------|----------------------------------------|
| URRM   | 500mm Riser - For Deeper Installations |
| U-LID  | Lid To Suit Underground Tanks          |
| R10112 | Uniseal 100mm                          |



PC01

## Vortex Self-Cleaning Fine Filters

| Code   | Description                                               |
|--------|-----------------------------------------------------------|
| URVF01 | Vortex Filter Suitable For Roof Areas Up To 200Sq Metres  |
| URVF15 | Vortex Filter Suitable For Roof Areas Up To 500Sq Metres  |
| URVF30 | Vortex Filter Suitable For Roof Areas Up To 3000Sq Metres |
| URVFR  | Riser Only - For Vortex Self Cleaning Filter              |
| URVFWM | Vortex Filter Wall Mount                                  |



URVF01

## Tank Inlet Filter


| Code | Description                             |
|------|-----------------------------------------|
| TIF3 | Tank Inlet Filter 300mm including Sieve |
| TIF4 | Tank Inlet Filter 400mm including Sieve |



TIF4

## Inlet Strainers

| Code | Description |
|------|-------------|
| S2   | Sieve 200mm |
| S3   | Sieve 300mm |
| S4   | Sieve 400mm |
| S5   | Sieve 500mm |

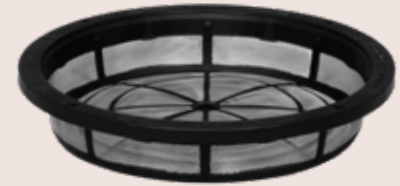

S4

## Rural Fire Tank Fittings

| Code | Description                                                        |
|------|--------------------------------------------------------------------|
| CFA1 | 65mm CFA Coupling Only (VIC)                                       |
| CFA2 | 65mm CFA Coupling complete with 50mm (2") Outlet & Ball Valve      |
| CFAC | Cap to suit CFA1                                                   |
| CFS1 | 65mm CFS Coupling Only (SA)                                        |
| CFS2 | 65mm CFS Coupling (SA) Complete with 50mm (2") Outlet & Ball Valve |
| RFS  | Rural Fire Service Fitting (NSW)                                   |
| RFS2 | RFS Coupling Complete (VIC Metro, NSW Rural)                       |



AFV2LB

## Fittings for Pipeline Tanks

| Code    | Description                                                                                            |
|---------|--------------------------------------------------------------------------------------------------------|
| AFV2L-A | 25mm (1") plastic Sleeve Valve - Long Arm                                                              |
| AFV2LB  | 25mm (1") Plastic Sleeve Valve - Long Arm including M & F Threaded Outlet                              |
| AFV4B   | 40mm (1½") Plastic Sleeve Valve - High Volume incl M & F Outlet. Pressure range 0 - 450kpa (0 - 65psi) |
| AFV5B   | 50mm (2") Plastic Sleeve Valve - High Volume incl M & F Outlet. Pressure range 0 - 450kpa (0 - 65psi)  |
| PLTIP25 | Pipeline Tank Internal Pipework 25mm                                                                   |
| PLTIP40 | Pipeline Tank Internal Pipework 40mm                                                                   |
| PT2140  | 40mm (1 1/2") Dual Level reservoir valve                                                               |
| PT2150  | 50mm (2") Dual Level reservoir valve                                                                   |



LH01.5



BV1.5

## Outlets

| Code   | Description     |
|--------|-----------------|
| LH01   | 25mm (1") M+F   |
| LH01.5 | 40mm (1.5") M+F |
| LH02   | 50mm (2") M+F   |
| LH03   | (3") 80mm M     |

## Ball Valves

| Code  | Description |
|-------|-------------|
| BV1   | 25mm (1")   |
| BV1.5 | 40mm (1.5") |
| BV2   | 50mm (2")   |
| BV3   | 80mm (3")   |

# Water Pumps

## Household Pumps with Brass Rain/Mains Changeover Device

| Code      | Description       | Wattage | Max Flow (LPM) | Power (kW) | Inlet     | Outlet    | Warranty |
|-----------|-------------------|---------|----------------|------------|-----------|-----------|----------|
| MHR20-370 | Single Story Pump | 370W    | 55             | 0.37       | 25mm BSPF | 20mm BSPF | 3 years  |
| MHR20-550 | Double Story Pump | 550W    | 70             | 0.55       | 25mm BSPF | 20mm BSPF | 3 years  |

## Submersible Pumps

| Code           | Description                                | Wattage | Max Flow (LPM) | Power (kW) | Inlet | Outlet    | Warranty |
|----------------|--------------------------------------------|---------|----------------|------------|-------|-----------|----------|
| HHR-370S-PC    | Pump & Press Control                       | 370W    | 82             | 0.37       | 5m    | 20mm BSPM | 2 years  |
| HHR-370S-PC+CO | Pump w/ Press Control & Change-over Device | 370W    | 82             | 0.37       | 5m    | 32mm BSPF | 2 years  |

## Garden Pumps with Press Control

| Code    | Description          | Wattage | Max Flow (LPM) | Power (kW) | Inlet     | Outlet    | Warranty |
|---------|----------------------|---------|----------------|------------|-----------|-----------|----------|
| DHJ600  | Pump & Press Control | 600W    | 45             | 0.6        | 25mm BSPF | 25mm BSPM | 2 years  |
| DHJ800  | Pump & Press Control | 800W    | 55             | 0.8        | 25mm BSPF | 25mm BSPM | 2 years  |
| HSJ1000 | Pump & Press Control | 1000W   | 85             | 1          | 25mm BSPF | 25mm BSPM | 3 years  |



HHR-370S-PC



HHR-370S-PC+CO



MHR20-370



MHR20-550



DHJ600



DHJ800



HSJ1000







# Septic Tanks & Pump Wells



# Septic Tanks

## Key Features

- Self anchoring – does not require concrete
- Fittings and baffle pre-installed
- Certified for NSW, VIC, SA, QLD, NT
- 10 minute hook up
- Low profile design – minimal excavation required
- One piece construction
- 100mm inlet and outlet pre-installed
- Heavy duty lid tested to 500kg loading
- 500mm riser extension available
- Certified to AS/NZS 1546.1:2008 Standard

## Product Range

| Code   | Capacity (Litres) | Weight (kg) | Length | Width | Height | Inlet Size | Outlet Size | No. of Persons |
|--------|-------------------|-------------|--------|-------|--------|------------|-------------|----------------|
| ST3100 | 3,100             | 200         | 2470   | 1640  | 1700   | 100        | 100         | 1-5 people     |
| ST4550 | 4,550             | 325         | 3520   | 1640  | 1700   | 100        | 100         | 6-10 people    |

## Accessories

| Code   | Description                            |
|--------|----------------------------------------|
| U-LID  | Lid to suit Septic Tank                |
| URRM   | 500mm Riser - for deeper installations |
| LID-CD | Heavy Duty Class D Lid                 |



Class D Lid Available



Fittings & Baffle Pre-Assembled



Heavy Duty Lid





Optional Riser Available




ST3100

## Dimensions

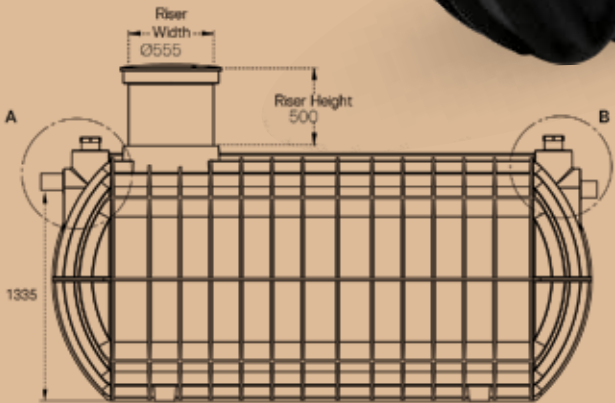

DETAIL A (INLET)



DETAIL B (OUTLET)

# Pump Wells



## Key Features


- Round / square lids available
- Optional riser available
- Variable Inlet / outlet heights
- Tough rotationally moulded polyethylene vessel
- Designed & certified to AS/NZS 1546.1:2008 Standard
- Flat base, perfect for pump to sit on
- One piece construction
- Rubber ring seal fitting provided for pipe connection.

## Product Range

| Capacity (Litres) | Tank w/Round Lid | Dimensions (mm)  | Tank w/Square Lid | Dimensions (mm)  |
|-------------------|------------------|------------------|-------------------|------------------|
| 700               | PW700-RND        | 1090 DIA x 1313H | PW700-SQR         | 1090 DIA x 1255H |
| 1,000             | PW1000-RND       | 1090 DIA x 1703H | PW1000-SQR        | 1090 DIA x 1645H |
| 1,300             | PW1300-RND       | 1090 DIA x 2093H | PW1300-SQR        | 1090 DIA x 2035H |

## Accessories

| Code   | Description                            |
|--------|----------------------------------------|
| U-LID  | Lid to suit Pump Well                  |
| URRM   | 500mm Riser - for deeper installations |
| LID-CD | Heavy Duty Class D Lid                 |



Class D Lid Available



Square Lids Available



Optional 500mm Riser Available

Round / Square lids available  
- Optional riser  
- Class D (heavy duty) lid available


Lifting Points

Variable Inlet / Outlet heights

Tough rotationally moulded polyethylene vessel

Designed & Certified to AS/NZS 1546.1:2008 Standard

Flat base, perfect for pump to sit on

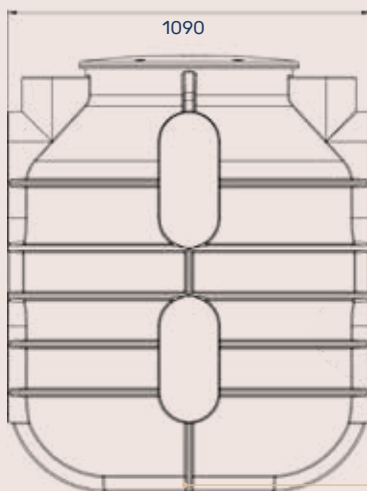

PW700-RND



PW700-RND

# Pump Stations



Pre-installed stand with mount for:

- High level visual and audible liquid alarm
- Outdoor power point for electrical connectivity

Pump is easily lifted out via the PVC without touching liquid

Lid load-rated to 500kg

Lifting lugs

Outlet with 40mm Poly Pipe connector


Completely pre-plumbed with ball valve, swing check valve & barrel union

Ribbing adds strength & creates self-anchoring tank

High level alarm float switch

Large flat spots around chamber to provide variable inlet positions

Stormwater / grey water pump  
\*sewer / black water pump also available

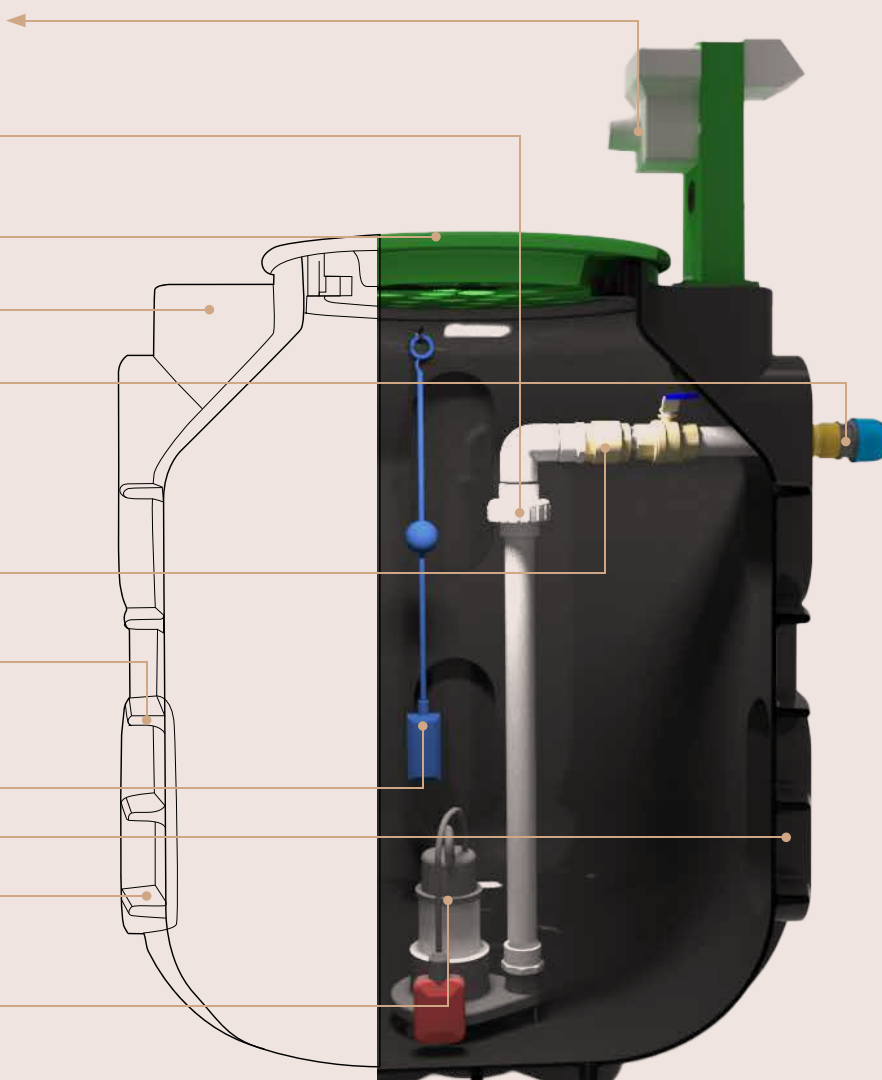

| Capacity (Litres) | Stormwater / Grey Water | Sewer / Black Water | Dimensions (mm)  |
|-------------------|-------------------------|---------------------|------------------|
| 700               | PS700-STM               | PS700-SWR           | 1090 DIA x 1650H |
| 1000              | PS1000-STM              | PS1000-SWR          | 1092 DIA x 2030H |
| 1300              | PS1300-STM              | PS1300-SWR          | 1094 DIA x 2420H |

| Code         | Description                       | AMPS | Max Flow (L/MIN) | Power | Outlet | Warranty |
|--------------|-----------------------------------|------|------------------|-------|--------|----------|
| PUMP-SSP-STM | Stormwater / Grey Water Sump Pump | 2    | 200              | 240V  | 40     | 2 years  |
| PUMP-SSP-SWR | Sewer / Black Water Grinder Pump  | 9.5  | 350              | 240V  | 50     | 1 year   |







# Diesel Tanks

# Ute Packs



## Key Features

- High quality Piusi Italian pump
- Lockable lid
- UV protected
- Earth strap
- 4m Diesel hose
- In-line mesh filter
- Pump isolation switch
- Auto shutoff nozzle with swivel
- 4m pump cable + alligator clips
- Vented fill cap

## Optional Extras

- Gas Struts - Only available on cube ute packs
- Fuel Gauge
- Digital fluid meter
- Bund available - cube ute packs



Pump



Nozzle



Vented Filler Cap +  
Inline Filter



Alligator Clips



Lockable Lid



Base Wear Pads

## Product Range

| Code                  | Capacity<br>(Litres) | Dimensions<br>(L x W x H) | Pump*    | Pump Flow<br>(LPM) | Hose Length<br>(m) | Auto Trigger Nozzle |
|-----------------------|----------------------|---------------------------|----------|--------------------|--------------------|---------------------|
| DMP100E               | 100                  | 770 x 540 x 500           | DP50PUMP | 50                 | 4                  | Yes                 |
| DMP200E               | 200                  | 1000 x 750 x 605          | DP50PUMP | 50                 | 4                  | Yes                 |
| DMP400E               | 400                  | 1620 x 750 x 665          | DP50PUMP | 50                 | 4                  | Yes                 |
| DMPQ400E              | 400                  | 930 x 1200 x 685          | DP50PUMP | 50                 | 4                  | Yes                 |
| DMPQB400E<br>(Bunded) | 400                  | 1130 x 1380 x 832         | DP50PUMP | 50                 | 4                  | Yes                 |
| DMP600E               | 600                  | 1720 x 890 x 755          | DP50PUMP | 50                 | 4                  | Yes                 |
| DMP800E               | 800                  | 1720 x 890 x 925          | DP50PUMP | 50                 | 4                  | Yes                 |

\*Refer to Diesel Pump page for full pump details on page 34



# Single Skin Tanks



## Key Features

- High quality diesel grade material
- UV resistant for Australian conditions
- Plug & play installation, easy to relocate
- Clock-type level gauge
- Galvanised pipework
- 2" aluminium camlock
- Lockable ball valve
- Earthing rod
- Breather vent
- Mechanical overfill protection
- Australian made tank
- Complies to Australian standards AS1940:2017 with approved bund
- Quality Italian pumps available in 240V & 12V
- Lockable pump
- 70LPM pump (56LPM on 12V unit)
- Water captor filter
- 6m diesel hose (4m on 12V unit)
- Auto shutoff nozzle
- Mechanical fluid meter

## Product Range

| Capacity (Litres) | Tank Only | Tank + Dispenser 240V | Tank + Dispenser 12V |
|-------------------|-----------|-----------------------|----------------------|
| 5,000             | DSW5000   | DSW5000+DK-240V       | DSW5000+DK-12V       |
| 7,000             | DSW7000   | DSW7000+DK-240V       | DSW7000+DK-12V       |
| 10,000            | DSW10000  | DSW10000+DK-240V      | DSW10000+DK-12V      |



# Transfer Tanks



## Key Features

- High quality Piusi Italian pumps
  - Pin mounting feet to secure to trailer or flat bed
  - 4m Diesel hose
  - Site tube with ball valve
  - Auto shutoff nozzle with swivel
  - 4m pump cable + alligator clips
  - Vented fill cap
  - Earth strap
  - Pump isolation switch
  - UV protected
- \*Refer to Diesel Pump page for full pump details on page 35



Breather



Site Tube



Pump



Nozzle



Alligator Clips



Pin Mounts

## Product Range

| Capacity (Litres) | Tank Only | Tank + 12v Pump | Tank + Fastflow 12v Pump | Tank + Dual 24/ 12v Pump | Tank + 240v Pump | Dimensions (L X W X H) |
|-------------------|-----------|-----------------|--------------------------|--------------------------|------------------|------------------------|
| 1200              | DM1200-S  | DMP1200-S       | DMPF1200-S               | DMPD1200-S               | DMP1200-S-240V   | 1500 x 1190 x 920      |
| 2000              | DM2000-S  | DMP2000-S       | DMPF2000-S               | DMPD2000-S               | DMP2000-S-240V   | 2280 x 1280 x 990      |
| 3000              | DM3000-S  | DMP3000-S       | DMPF3000-S               | DMPD3000-S               | DMP3000-S-240V   | 2280 x 1540 x 1220     |

## Pump Options

| Pump Code      | Pump Type    | Voltage | Power (kW) | Flow (LPM) |
|----------------|--------------|---------|------------|------------|
| DP50PUMP12-ASY | 12V          | 12      | 0.3        | 50         |
| DP85PUMP       | FASTFLOW 12V | 12      | 0.5        | 85         |
| DP1224PUMP     | DUAL 24/12V  | 24 / 12 | 0.42/0.15  | 70/35      |
| DP72PUMP       | 240V         | 240     | 240        | 75         |



DMP3000-S



DMP1200-S

# Trailer Packages



## Key Features

- Hot dip galvanised dual axle trailer
- 5 Stud wheel pattern
- Electric brakes - 2000L
- Hydraulic brakes - 1200L
- Road pack including brakes and LED lights
- Emergency breakaway protection
- Compliance plate - road registrable
- 85LPM 12V Diesel pump with by-pass valve and integrated on/off switch
- Auto shutoff nozzle with 6m hose
- 4m pump cable + alligator clips
- Breather vent
- Trailer mounted toolbox to protect the hose, pump and nozzle
- 10m retractable hose reel (optional extra)

\*Refer to Diesel Pump page for full pump details



**Mechanical fluid meter**

**Diesel pump with by-pass valve & integrated on/off switch**  
voltage - 12v - flow rate - 85 l/min - duty cycle - 30mins

**Auto shutoff nozzle with 6m hose as standard**

## Product Range

| Code        | Capacity (Litres) | Tank Dimensions (L x W x H) | Trailer Dimensions (L x W x H) | Pump*    | Pump Flow LPM | Hose Length (m) | Auto Trigger Nozzle |
|-------------|-------------------|-----------------------------|--------------------------------|----------|---------------|-----------------|---------------------|
| DMPFT1200-S | 1200              | 1450 x 1200 x 1000          | 3940 x 1770 x 1500             | DP85PUMP | 85            | 6               | Yes                 |
| DMPFT2000-S | 2000              | 1900 x 1450 x 1200          | 4460 x 1970 x 1650             | DP85PUMP | 85            | 6               | Yes                 |

Breather vent

Certified diesel grade polyethylene tank

DMPFT1200-S

Hydraulic braking system (DMPFT1200-S)

50mm coupling

Hot-dip galvanised trailer rated for gross weight  
1200l - 2 Tones  
2000l - 2.8 Tones

Dual axle heavy duty suspension with 14" rims and tyres

Heavy duty jockey wheel

Trailer safety chain




# Self Bunded Tanks

Three models available: Essential, Ranger or Quantum



## Cabinet Details (Essential Model Shown)

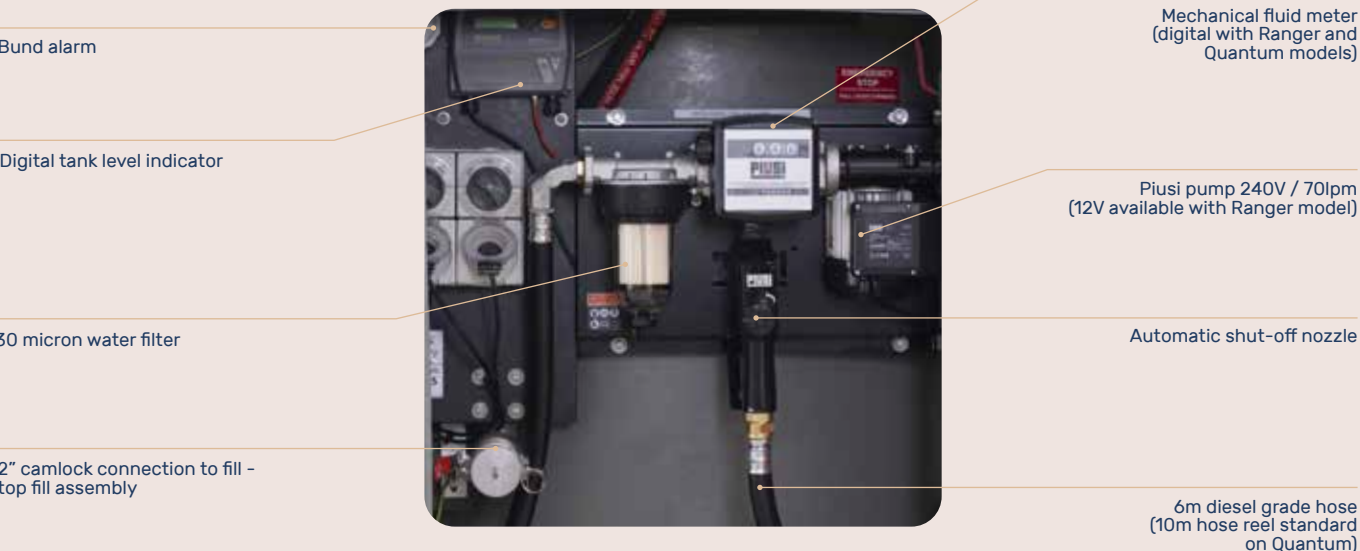

## Bunded Tanks Comparison Chart


| Features                                                       | *Essential | Ranger | Quantum |
|----------------------------------------------------------------|------------|--------|---------|
| Power supply - 240V                                            | •          | •      | •       |
| Power supply - 12V                                             |            | •      |         |
| 70LPM Piusi pump                                               | •          | •      | •       |
| 6mtr dispensing hose with auto-shut off trigger nozzle         | •          | •      |         |
| 10mtr hose reel with auto-shutoff trigger nozzle               |            |        | •       |
| Auto-shutoff nozzle holster                                    |            | •      | •       |
| 30 micron clear water capture filter - to 150LPM               | •          | •      | •       |
| 2" camlock connection to fill - top fill assembly              | •          | •      | •       |
| Anti-splash/anti-static top fill assembly                      | •          | •      | •       |
| Mechanical overfill protection                                 | •          | •      | •       |
| High/Low level electronic audible alarm                        |            | •      | •       |
| Bund alarm                                                     | •          | •      | •       |
| 110% secondary containment bund capacity                       | •          | •      | •       |
| Flame retardant outer tank material                            | •          | •      | •       |
| Digital level indicator                                        | •          | •      | •       |
| Secured lockable cabinet to protect equipment                  | •          | •      | •       |
| Mechanical fluid meter to measure vehicle usage                | •          |        |         |
| Digital fluid meter to measure vehicle usage                   |            | •      | •       |
| Power control box with auto time out (10mins) & emergency stop |            | •      | •       |
| Fuel management system for up to 120 users                     |            |        | •       |

## Specifications

| Code      | Capacity (Litres) | A    | B    | C    | D    |
|-----------|-------------------|------|------|------|------|
| DMDS5000  | 5,000             | 2200 | 2080 | 2260 | 2750 |
| DMDS7000  | 7,000             | 2500 | 2190 | 2350 | 3070 |
| DMDS10000 | 10,000            | 2500 | 2520 | 2710 | 3062 |

\*Essential model only available in 10,000L

## Dimensions

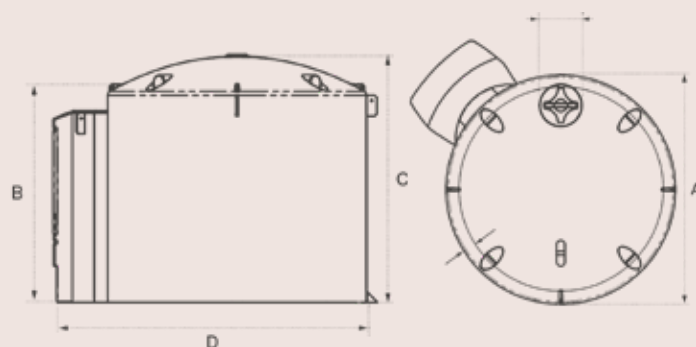

# Dispensing Kits & Pumps

## Key Features

- Mechanical Digit Meters
- Auto shutoff nozzles
- 12V and 240V Options available
- High quality Piusi Italian pumps
- Lockable (CUBE Models)
- Steel backing board (pre-assembled)

## Product Range

| Code        | Flow Rate (LPM) | Voltage | Hose Length (m) | Hose Diameter | Outlet (BSP) |
|-------------|-----------------|---------|-----------------|---------------|--------------|
| DP72KA      | 70              | 240v    | 6               | 20            | 25           |
| CUBE56-12V  | 56              | 12v     | 4               | 25            | 25           |
| CUBE70-240V | 70              | 240v    | 6               | 25            | 25           |

CUBE70-240V



DP72KA



CUBE56-12V



## Diesel Pumps

| Code            | Description           | Voltage | Power (kW) | Flow (LPM) | Inlet | Outlet | Warranty (yrs) | Kit     |
|-----------------|-----------------------|---------|------------|------------|-------|--------|----------------|---------|
| DP50PUMP12V-ASY | 50Lpm                 | 12v     | 0.3        | 50         | 25mm  | 25mm   | 1              | DP50K   |
| DP72PUMP        | 72Lpm                 | 240v    | 0.5        | 72         | 25mm  | 25mm   | 1              | DP72K   |
| DP85PUMP        | 85Lpm Fast Flow       | 12v     | 0.5        | 85         | 25mm  | 25mm   | 1              | DP85K   |
| DP1224PUMP      | 70/35Lpm Dual Voltage | 12v/24v | 0.42/0.15  | 70/35      | 25mm  | 25mm   | 1              | DP1224K |

# Accessories

## Filters

| Code         | Description                                                         |
|--------------|---------------------------------------------------------------------|
| DCF-150-A    | Water Captor Filter 150lpm (Metal) - Full Assembly                  |
| DCF-150-CART | Water Captor Filter 150lpm (Metal) - Cartridge Only                 |
| DCF-100-A    | Water Captor Filter 100lpm (Clear) - Full Assembly - 2 x Cartridges |
| DCF-100-CART | Water Captor Filter 100lpm (Clear) - Cartridge Only                 |
| DCF-70-A     | Water Captor Filter 70lpm (Metal) - Full Assembly - 2 x Cartridges  |
| DCF-70-CART  | Water Captor Filter 70lpm (Metal) - Cartridge Only                  |

## Meters & Gauges

| Code   | Description                                  |
|--------|----------------------------------------------|
| CLG-D  | Diesel Clock Level Gauge                     |
| DMDT   | Digital Turbine Meter                        |
| DMM4   | 4 Digit Mechanical Meter                     |
| DPM    | Diesel Pulse Meter                           |
| DFG100 | Diesel Fuel Gauge - Suits DMP100E            |
| DFG200 | Diesel Fuel Gauge - Suits DMP200E            |
| DFG400 | Diesel Fuel Gauge - Suits DMP400E            |
| DFG600 | Diesel Fuel Gauge - Suits DMP600E + DMPQ400E |
| DFG800 | Diesel Fuel Gauge - Suits DMP800E            |



DPM



DMDT



DMM4




BMCB-D



DCF-150-A



CLG-D



DHR10M25



ATN90

## Accessories

| Code             | Description                                           |
|------------------|-------------------------------------------------------|
| ATN65            | 65LPM Diesel Auto Nozzle                              |
| ATN90            | 90LPM Diesel Auto Nozzle                              |
| BMCB-D           | Diesel MC Box                                         |
| D-CONNECT2KIT    | Diesel Connection Hose to Kits                        |
| DH2025-4M        | 4m Diesel hose - 20 x 25 Male connectors              |
| DH2025-6M        | 6m Diesel hose - 20 x 25 Male connectors              |
| DHR10M25         | 10m Diesel Retractable Hose Reel                      |
| FCV              | Diesel Vented Filling Cap - Plastic - Suits DMP Range |
| MCBKEYS          | MC Box User Keys (Pk 10)                              |
| MCBKEYS-RED      | MC Box User Keys - Red Manager                        |
| MCBPCIF          | MC Box PC Software & USB Convert                      |
| MCBSW            | MC Box Software                                       |
| SPK              | Solar Panel Kit                                       |
| DM400QBUND       | Diesel 400L Cube Outer Bund                           |
| STRUT-430MM-200N | Gas Strut 430MM L 200N - Suits Cube Range             |






AdBlue<sup>®</sup>  
Tanks

# Ute Packs & Accessories



## Portable Ute Packs

| Code       | Description             | Capacity (Litres) | Dimensions (L x W x H) | Pump    | Pump Flow | Hose Length |
|------------|-------------------------|-------------------|------------------------|---------|-----------|-------------|
| BM200B-P12 | Tank + 12 Volt Pump Kit | 200               | 1000 x 750 x 605       | B12VP-P | 35        | 4           |
| BM400B-P12 | Tank + 12 Volt Pump Kit | 400               | 1620 x 750 x 665       | B12VP-P | 35        | 4           |

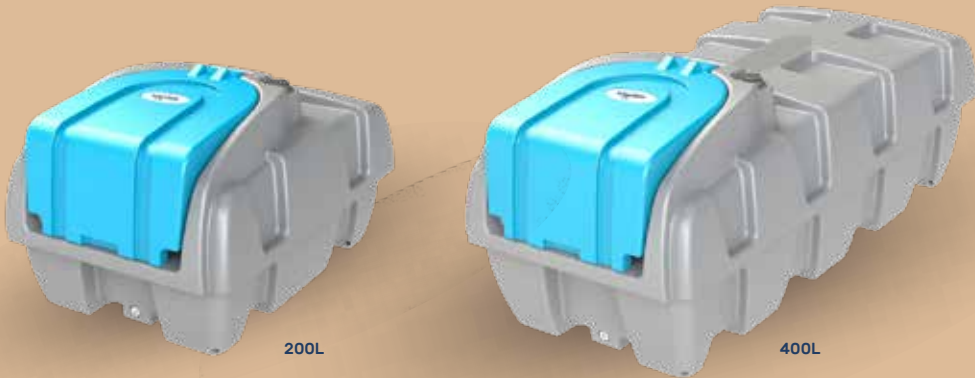

## Accessories

| Code    | Description                             |
|---------|-----------------------------------------|
| BATN-P  | AdBlue® Auto Shutoff Nozzle (Piusi)     |
| BDM-P   | AdBlue® Digital Meter                   |
| BMCB-A  | AdBlue® McBox                           |
| BMHR8-P | AdBlue® Hose Reel Retractable 20mm x 8m |
| BMLI    | Level Indicator (Ocio) AdBlue®          |
| BMTN-P  | Nozzle Manual AdBlue® - Plastic Piusi   |



# Single Skin Storage Tanks



## Key Features

- External Liquid Level Indicator
- SS Pipework
- 2" SS Dry Break
- 2" Outlet and Ball Valve
- Earthing Rod
- Breather Vents
- Screw Lid - Inspection Hatch

## Round Tanks

| Code        | Capacity (Litres) | Dimensions (MM)  |
|-------------|-------------------|------------------|
| BMS2000RPB  | 2,000             | 1175 Dia x 2355H |
| BMS4000RPB  | 4,000             | 1600 Dia x 2300H |
| BMS5000RPB  | 5,000             | 1800 Dia x 2300H |
| BMS7000RPB  | 7,000             | 2200 Dia x 2300H |
| BMS10000RPB | 10,000            | 2480 Dia x 2450H |



BMS5000RPB

## Slimline Tanks

| Code        | Capacity (Litres) | Dimensions (L x W x H) |
|-------------|-------------------|------------------------|
| BMSL2000RPB | 2,000             | 2590 x 750 x 2110      |
| BMSL3000RPB | 3,000             | 2870 x 940 x 2150      |
| BMSL5000RPB | 5,000             | 3590 x 1170 x 2110     |



BMSL5000RPB



AdBlue® Level Gauge



SS Pipework & 2" SS Dry Break



2" Outlet and Ball Valve

## Single Skin Slimline Tank + Cabinet

### Key Features

- Optimised Fleet Solutions for AdBlue® storage and dispensing to SCR/DEF equipped vehicles.
- Slimline Submersible Pump Available in Calpeda or Franklin options
- Simplifies dispensing operation
- Plug 'n' play set up for fast installation



BMSL5000GY-C

| Code         | Description                     | Capacity (Litres) | Dimensions (L x W x H) | Pump     | Pump Flow | Hose Length |
|--------------|---------------------------------|-------------------|------------------------|----------|-----------|-------------|
| BMSL5000LG-C | Slimline AdBlue® Tank + Cabinet | 5,000             | 4140 x 1170 x 2110     | B240VP-P | 35        | 5           |



# Self Bunded Tanks

Three models available: DEPOT, TERMINAL, SUBMERSIBLE



## Cabinet Details Depot Range



## Terminal Range Standard Features



8m Hose Reel




MC Box (User management system)

## Bunded Tanks Comparison Chart

| Features                                      | Depot       | Terminal    | Submersible |
|-----------------------------------------------|-------------|-------------|-------------|
| Australian made                               | •           | •           | •           |
| 110% Bund capacity                            | •           | •           | •           |
| Bund alarm                                    | •           | •           | •           |
| Digital tank volume measurement               | •           | •           | •           |
| 50mm (2") Stainless Steel Drybreak (fill)     | •           | •           | •           |
| Mechanical Overfill protection                | •           | •           | •           |
| High/Low level audible alarms                 | •           | •           | •           |
| Power control panel with emergency stop       | •           | •           | •           |
| Earth rod                                     | •           | •           | •           |
| Auto timeout - 10mins                         | •           | •           | •           |
| Lockable cabinet                              | •           | •           | •           |
| Digital delivery meter                        | •           | •           |             |
| 120 User Piusi fuel management system         |             | •           |             |
| 5mtr delivery hose                            | •           |             |             |
| 8mtr retractable delivery hose reel           | Optional    | •           |             |
| Auto shut off nozzle and holster              | •           | •           |             |
| 25mm Discharge line terminated in the cabinet |             |             | •           |
| Warranty                                      | 5yr on Tank | 5yr on Tank | 5yr on Tank |
| 240V - 35LP Piusi AdBlue® Pump                | Standard    | Standard    |             |
| 12V - 35LPM Piusi AdBlue® Pump                | Optional    |             |             |
| 240V - Calpeda Submersible AdBlue® Pump       |             |             | Standard    |
| Globe valve to regulate flow rate             |             |             | •           |
| ATG Probe Tube                                | Optional    | Optional    | Optional    |

## Specification AdBlue® Self Bunded Tanks

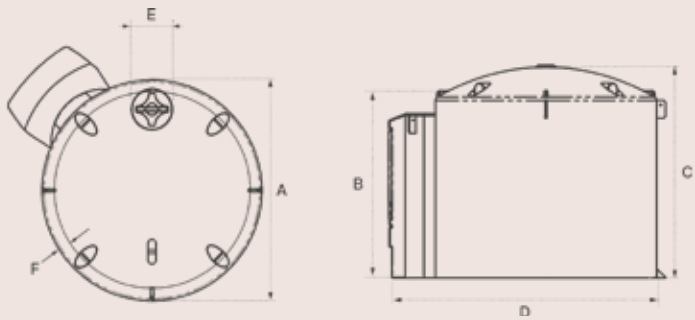

| Code      | Capacity<br>(Litres) | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) |
|-----------|----------------------|-----------|-----------|-----------|-----------|
| BMDS2300  | 2300                 | 1600      | 2160      | 2200      | 2120      |
| BMDS3300  | 3300                 | 1800      | 2130      | 2200      | 2300      |
| BMDS5000  | 5000                 | 2200      | 2080      | 2260      | 2750      |
| BMDS7000  | 7000                 | 2500      | 2190      | 2350      | 3070      |
| BMDS10000 | 10,000               | 2500      | 2520      | 2710      | 3062      |





# Fire Fighting

# Water Cartage Tanks



## Ute Packs - Key Features


- Moulded internal baffles for vehicle stability
- Threaded outlet
- Tough and durable one-piece moulding
- 140mm vented lid
- High strength, lightweight polyethylene construction
- Provision for strap
- Wear pads to allow airflow underneath and protect ute tray

| Code    | Capacity (Litres) | Dimensions (L x W x H) | Outlet |
|---------|-------------------|------------------------|--------|
| FTR200  | 200               | 1050 x 750 x 600       | 25mm   |
| FTR400  | 400               | 1680 x 750 x 600       | 25mm   |
| FTR600U | 600               | 1720 x 890 x 755       | 25mm   |
| FTR800U | 800               | 1720 x 890 x 925       | 25mm   |

## Water Cartage Tanks - Key Features

- Threaded outlet
- Forklift galvanised skids available
- Tough and durable one-piece moulding
- 400mm 1/4 turn hinged lid
- Sits directly on any flat surface
- High strength, lightweight polyethylene construction
- Provision for strap or pin mounting

| Code      | Capacity (Litres) | Dimensions (L x W x H) | Outlet |
|-----------|-------------------|------------------------|--------|
| FTR600-S  | 600               | 1200 x 1120 x 710      | 50mm   |
| FTR800-S  | 800               | 1500 x 1190 x 710      | 50mm   |
| FTR1200-S | 1,200             | 1500 x 1190 x 975      | 50mm   |
| FTR2000-S | 2,000             | 2280 x 1280 x 1040     | 50mm   |
| FTR3000-S | 3,000             | 2280 x 1540 x 1270     | 50mm   |

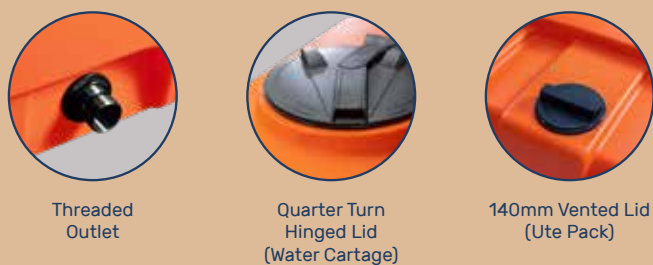

# Compact Packages



## Key Features

- Tough and durable one-piece moulding
- Sits directly on any flat surface
- High strength, lightweight polyethylene construction
- 12m hose with fire fighting nozzle
- Optional Bottom Fill Kit (BFK) available.
- Wear pads to allow airflow underneath and protect ute tray
- 36m Hose Reel & Fire-Fighting Nozzle with all -HR models
- Provision for strap
- Moulded internal baffles for vehicle stability

\*Refer to Water Cartage & Fire Fighting Pumps page 48 for full pump details

| Code           | Capacity (Litres) | Power (HP) | Dimensions (L x W x H) | Pump Code | Engine/Pump | Starter     |
|----------------|-------------------|------------|------------------------|-----------|-------------|-------------|
| FTRC200-25     | 200               | 2.5        | 1050 X 750 X 600       | MB25L     | Loncin/Onga | Pull Petrol |
| FTRC200-55     | 200               | 5.5        | 1050 X 750 X 970       | B55H      | Honda/Onga  | Pull Petrol |
| FTRC400-25     | 400               | 2.5        | 1680 X 750 X 600       | MB25L     | Loncin/Onga | Pull Petrol |
| FTRC400-55     | 400               | 5.5        | 1680 X 750 X 970       | B55H      | Honda/Onga  | Pull Petrol |
| FTRC400-55-HR* | 400               | 5.5        | 1680 X 750 X 1070      | B55H      | Honda/Onga  | Pull Petrol |
| FTRC600-55     | 600               | 5.5        | 1720 X 890 X 1050      | B55H      | Honda/Onga  | Pull Petrol |
| FTRC600-55-HR* | 600               | 5.5        | 1720 X 890 X 1150      | B55H      | Honda/Onga  | Pull Petrol |
| FTRC800-55     | 800               | 5.5        | 1720 X 890 X 1260      | B55H      | Honda/Onga  | Pull Petrol |
| FTRC800-55-HR* | 800               | 5.5        | 1720 x 890 x 1360      | B55H      | Honda/Onga  | Pull Petrol |


\*HR - Includes 36m Hose Reel



Pump



Hose Reel



Nozzle



FTRC400-55



FTRC800-55-HR



# Skid Mounted Packages

## Key Features

- 6.5HP Honda powered twin-impeller onga (pentair) pump
- 36m hose reel and fire fighting nozzle included
- Heavy duty galvanised skid frame
- Fork on - fork off capability
- Bottom fill manifold with 6m suction hose
- Optional dust suppression nozzle kit available (DSN20K)

\*Refer to Pump page 48 for full pump details

## Product Range

| Code          | Capacity (Litres) | Starter         | Dimensions (L x W x H) | Pump Code |
|---------------|-------------------|-----------------|------------------------|-----------|
| FTRS600-S     | 600               | Pull-Petrol     | 1685 x 1160 x 810      | B65HT     |
| FTRS800-S     | 800               | Pull-Petrol     | 1720 x 1500 x 810      | B65HT     |
| FTRS1200-S    | 1,200             | Pull-Petrol     | 1720 x 1500 x 1075     | B65HT     |
| FTRS1200ES-S  | 1,200             | Electric-Petrol | 1720 x 1500 x 1075     | B65HTES   |
| FTRS2000-S    | 2,000             | Pull-Petrol     | 2850 x 1480 x 1145     | B65HT     |
| FTRS2000ES-S  | 2,000             | Electric-Petrol | 2850 x 1480 x 1145     | B65HTES   |
| FTRS2000ESD-S | 2,000             | Electric-Diesel | 2850 x 1480 x 1145     | FFDPTES   |
| FTRS3000-S    | 3,000             | Pull-Petrol     | 2850 x 1540 x 1370     | B65HT     |
| FTRS3000ES-S  | 3,000             | Electric-Petrol | 2850 x 1540 x 1370     | B65HTES   |
| FTRS3000ESD-S | 3,000             | Electric-Diesel | 2850 x 1540 x 1370     | FFDPTES   |



# Trailer Packages



## Key Features

- 6.5HP Honda powered twin-impeller onga (pentair) pump
- Hot dip galvanised dual axle trailer
- 14" wheels - 5 stud pattern
- Electric brakes - 2000L
- Hydraulic brakes - 1200L
- Road pack including brakes and LED lights
- Emergency breakaway protection - 2000L
- Compliance plate - road registrable
- 400mm 1/4 turn hinged lid
- Trailer mounted toolbox to protect the hose
- Suction return manifold with 6m suction hose
- 36m Hose reel & fire fighting nozzle
- Optional dust suppression nozzle kit available (**DSN20K**)

\*Refer to Water Cartage & Fire Fighting Pumps page 48 for full pump details

## Product Range

| Code           | Capacity (Litres) | Pump*   | Starter           | Engine/Pump | Tank Dimensions (L x W x H) | Trailer Dimensions (L x W x H) |
|----------------|-------------------|---------|-------------------|-------------|-----------------------------|--------------------------------|
| FTRT1200-S     | 1200              | B65HT   | Pull - Petrol     | Honda/Onga  | 1500 x 1190 x 975           | 3940 x 1770 x 1500             |
| FTRT1200TES-S  | 1200              | B65HTES | Electric - Petrol | Honda/Onga  | 1500 x 1190 x 975           | 3940 x 1770 x 1500             |
| FTRT1200TESD-S | 1200              | FFDPTES | Electric - Diesel | Yanmar/Onga | 1500 x 1190 x 975           | 3940 x 1770 x 1500             |
| FTRT2000-S     | 2,000             | B65HT   | Pull - Petrol     | Honda/Onga  | 2280 x 1280 x 1040          | 4460 x 1970 x 1650             |
| FTRT2000ES-S   | 2,000             | B65HTES | Electric - Petrol | Honda/Onga  | 2280 x 1280 x 1040          | 4460 x 1970 x 1650             |
| FTRT2000ESD-S  | 2,000             | FFDPTES | Electric - Diesel | Yanmar/Onga | 2280 x 1280 x 1040          | 4460 x 1970 x 1650             |



FTRT2000-S

# Pumps & Accessories

| Code    | Description                                 | Engine/<br>Pump | Starter              | Power<br>(HP) | Head<br>(m) | Flow<br>(LPM) | Inlet        | Outlet                         | # of<br>Outlets | Warranty<br>(yrs) |
|---------|---------------------------------------------|-----------------|----------------------|---------------|-------------|---------------|--------------|--------------------------------|-----------------|-------------------|
| MB25L   | Mini Blaze 2.5HP                            | Loncin/<br>Onga | Pull - Petrol        | 2.5           | 21          | 133           | 25mm<br>BSPM | 25mm<br>BSPM                   | 1               | 1                 |
| B55H    | Honda 5.5HP<br>Single Impeller              | Honda/<br>Onga  | Pull - Petrol        | 5.5           | 60          | 585           | 32mm<br>BSPM | 25mm,<br>25mm,<br>40mm<br>BSPM | 3               | 2                 |
| B65HT   | Honda 6.5HP Twin<br>Impeller                | Honda/<br>Onga  | Pull - Petrol        | 6.5           | 100         | 373           | 50mm<br>BSPM | 25mm,<br>25mm,<br>40mm<br>BSPM | 3               | 2                 |
| B65HTES | Honda 6.5HP Twin<br>Impeller Electric Start | Honda/<br>Onga  | Electric -<br>Petrol | 6.5           | 100         | 373           | 50mm<br>BSPM | 25mm,<br>25mm,<br>40mm<br>BSPM | 3               | 2                 |
| FFDPTES | Yanmar 7HP Diesel<br>Electric Start         | Yanmar/<br>Onga | Electric -<br>Diesel | 7             | 100         | 450           | 50mm<br>BSPM | 25mm,<br>25mm,<br>40mm<br>BSPM | 3               | 2                 |



MB25L



B55H



FFDPTES

## Fire Fighting Accessories

| Code   | Description                                              | Dimensions<br>(L x W x H) |
|--------|----------------------------------------------------------|---------------------------|
| BFK    | Bottom Fill Kit - Suits FTRC 5.5HP<br>Compact Fire Units |                           |
| FFHR1  | Hose Reel 20mm x 36mtr                                   | 555 DIA x 165W            |
| FHR    | Manual Hose Reel 20mm x 36mtr                            | 427 x 391 x 380           |
| DSN20K | Dust Suppression Nozzle                                  |                           |



FHR



FFHR1



POLYMASTER

Polymaster

Polymaster





# Agriculture & Farming

# Liquid Fertiliser Storage



## Self Draining Tanks – Key Features

- Completely self-draining tank base (100% drainage)
- To suit liquids up to to 1.5SG
- Top fill kit – 2" (50mm) SS camlock with ball valve
- Sight tube level indicator
- 2" (50mm) SS outlet with ball valve + camlock
- 90mm overflow/breather (mesh screen)
- 600mm vented screw lid for easy access

## Colour Range



## Self Draining Tanks – Product Range

| Code        | Capacity (Litres) | Diameter (mm) | Overall Height |
|-------------|-------------------|---------------|----------------|
| LFTSDT23000 | 23,000            | 3450          | 3054           |
| LFTSDT28000 | 28,000            | 3450          | 3601           |
| LFTSDT33000 | 33,000            | 3450          | 4149           |





## Flat Bottom Tanks – Key Features

- Heavy duty construction to suit liquids up to 1.5SG
- Level indicator as standard
- Optional top fill kit
- Inspection cover
- Standard with 50mm Threaded Outlet, Ball Valve and Camlock

## Flat Bottom Tanks – Product Range


| Code     | Capacity (Litres) | Diameter | Overall Height | Outlet Size | Top Fill Kit |
|----------|-------------------|----------|----------------|-------------|--------------|
| LFT9000  | 9,000             | 2500     | 2260           | 50          | LFTK         |
| LFT13600 | 13,600            | 3100     | 2450           | 50          | LFTK         |
| LFT22500 | 22,500            | 3560     | 2800           | 50          | LFTK         |
| LFT31700 | 31,700            | 4100     | 3040           | 50          | LFTK         |
| LFT50KL  | 50,000            | 4600     | 3440           | 50          | LFTK         |

| Standard Fittings and Locations |                                              |
|---------------------------------|----------------------------------------------|
| 12:00                           | Inspection Cover                             |
| 12:30                           | 2" Threaded Outlet (LH02)                    |
| 12:30                           | 2" Threaded Camlock (bottom fill connection) |
| 12.30                           | 2" Threaded Ball Valve                       |
| 1:30                            | Liquidator - True Level Indicator (LQ01)     |
| 2:30                            | Breather / Overflow                          |

| 3" Upgrade Option   |
|---------------------|
| 3" Outlet (LH03)    |
| 3" Ball Valve (BV3) |
| 3" Camlock (PC80-F) |



LFTK  
\*Optional extra

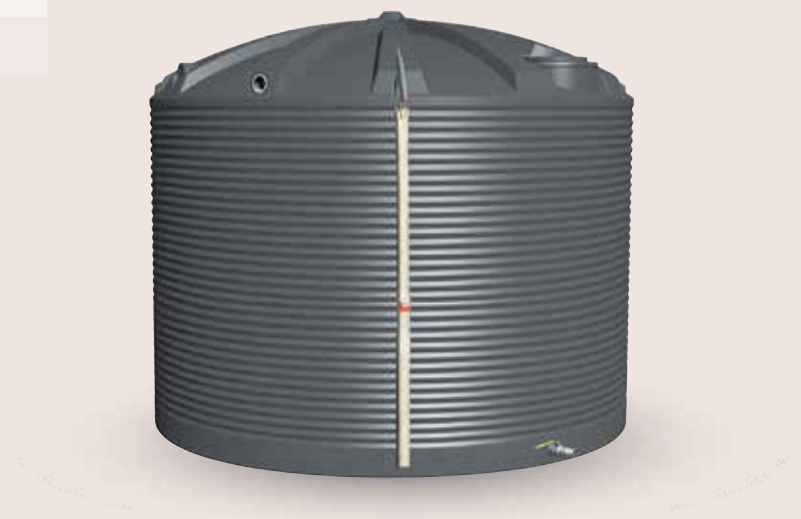

LFT22500  
\*Pole not included

# Fertiliser Mixing Tanks



## Key Features

- No internal pipework within tank to get in the way
- Self draining base with integrated moulded sump connects to PVC 65mm, 100mm for 5,000L & 9,000L
- 10 degree sloping base
- 50mm Camlock with base & venturi set up
- Pumps to suit venturi system available


## Fertigation Tank + Base & Venturi Fitout – Product Range

| Code      | Capacity (Litres)                   | Dimensions        | Lid      |
|-----------|-------------------------------------|-------------------|----------|
| FT2000B+V | 2,000                               | 2000 DIA x 1000 H | FTL2000  |
| FT5000B+V | 5,000                               | 2850 DIA x 1180 H |          |
| FT9000B+V | 9,000                               | 3500 DIA x 1280 H |          |
| FTL2000   | Lid to suit 2,000L Fertigation Tank |                   | 2180 DIA |

## Recommended Pump for Venturi Setup

| Code     | Description                        | Engine/Pump | Power (HP) | Head | Flow (LPM) | Inlet | Outlet | Warranty |
|----------|------------------------------------|-------------|------------|------|------------|-------|--------|----------|
| HTP750VR | Chemical Transfer Pump Honda 6.5HP | Honda/Onga  | 6.5        | 40m  | 750        | 50mm  | 50mm   | 2 years  |

## Diagram

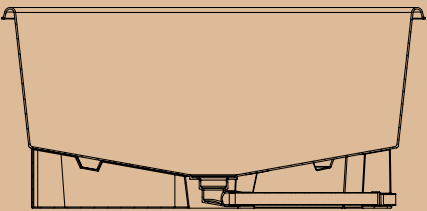

Vortex Plate



Venturi Agitators



Camlock Connection



Petrol or Diesel pumps available



\*PVC pipe not included




# Aquaculture



## Product Range

| Code    | Capacity (Litres)       | Diameter          | Poly Riser Screen | Base Slope | Outlet Size |
|---------|-------------------------|-------------------|-------------------|------------|-------------|
| FT200   | 200L Flat Bottom Tank   | 800 DIA x 560 H   |                   |            |             |
| FT500B  | 500L Tank + Base        | 1000 DIA x 1000 H | APRS              | 80mm       | 65mm        |
| FT1000B | 1,000L Tank + Base      | 1040 DIA x 1200 H | APRS              | 40mm       | 65mm        |
| FT2000B | 2,000L Tank + Base      | 2140 DIA x 1000 H | APRS              | 150mm      | 65mm        |
| FT5000B | 5,000L Tank + Base      | 2850 DIA x 1180 H | APRS              | 120mm      | 100mm       |
| FT9000B | 9,000L Tank + Base      | 3500 DIA x 1280 H | APRS              | 100mm      | 100mm       |
| FTL2000 | Lid to suit 2,000L Tank | 2180 DIA          |                   |            |             |

## Diagram

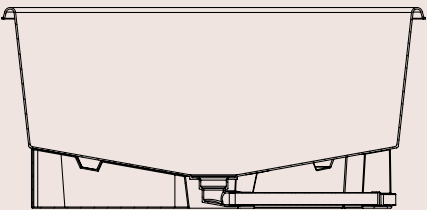

\*PVC pipe not included



FT9000B



FT5000B



FT1000B

# Round Water Troughs



## Master Tub Troughs – Key Features


- Easy to service float valves
- Full float protection
- Drain cap at very base of trough so maximum amount of water will empty when draining
- Raised float allows trough to fill completely

## Master Tub Troughs with float – Product Range

| Code | Capacity (Litres) | Dimensions      | Float Inlet | Pressure         | Drain | Drain Cap | Float | Float Cover |
|------|-------------------|-----------------|-------------|------------------|-------|-----------|-------|-------------|
| MT2  | 200               | 970 DIA x 375H  | 25mm BSPM   | 140psi / 965 kPa | 75    | DC3       | AFV2  | MTFC        |
| MT6  | 600               | 1400 DIA x 520H | 25mm BSPM   | 140psi / 965 kPa | 75    | DC3       | AFV2  | MTFC        |
| MT12 | 1,200             | 1765 DIA x 600H | 25mm BSPM   | 140psi / 965 kPa | 75    | DC3       | AFV2  | MTFC        |
| MT24 | 2,400             | 2380 DIA x 650H | 25mm BSPM   | 140psi / 965 kPa | 75    | DC3       | AFV2  | MT05        |
| MT45 | 4,500             | 3730 DIA x 650H | 25mm BSPM   | 140psi / 965 kPa | 75    | DC3       | AFV2  | MT04        |



Float + Float Cover



75mm Drain Cap



MT12



MT6



MT2

Bare Round Water Troughs no float – Product Range

| Code  | Capacity (Litres) | Dimensions      | Drain | Drain Cap |
|-------|-------------------|-----------------|-------|-----------|
| PT12W | 250               | 1000 DIA x 420H | 75    | DC3       |
| PT10W | 500               | 1200 DIA x 500H | 75    | DC3       |
| PT11W | 1,000             | 1650 DIA x 600H | 75    | DC3       |
| PT13W | 2,000             | 2100 DIA x 600H | 75    | DC3       |



Stock Water Tank & Trough – Key Features

- 1. Inspection cover
- 2. Full float cover to protect valve from stock damage
- 3. Inlet connection
- 4. 25mm float valve mounted in bottom of wall to maintain level in trough
- 5. 75mm drain cap in trough
- 6. 25mm tank inlet and 25mm float valve supplied



Stock Water Tank & Trough – Product Range

| Code    | Description                           | Capacity | Dimensions       | Float Inlet | Drain | Drain Cap | Float Cover |
|---------|---------------------------------------|----------|------------------|-------------|-------|-----------|-------------|
| SWT4500 | Tank & Trough Combination             | 4500L    | 2500 DIA x 2000H | 25mm BSPM   | 75    | DC3       | SWTC        |
| SWT15   | Trough Only – inc Float Valve & Cover | 1500L    | 2500 DIA x 375H  | 25mm BSPM   | 75    | DC3       | SWTC        |

# Long Water Troughs



## Supa Troughs with float – Key Features

- One-piece trough incorporating float cover
- Long lasting UV resistant polyethylene
- Flexible and durable
- Raised cover allows trough to fill fully
- 25mm Float Valve & Cover + 75mm drain cap each end

## Supa Troughs with float – Product Range

| Code  | Description | Capacity (Litres) | Pressure         | Dimensions (L x W x H) | Float cover | Float | Drain Cap |
|-------|-------------|-------------------|------------------|------------------------|-------------|-------|-----------|
| SPT5  | 5 foot      | 250               | 140psi / 965 kPa | 1500 x 600 x 375       | SPTA        | AFV2  | DC3       |
| SPT9  | 9 foot      | 450               | 140psi / 965 kPa | 2700 x 600 x 375       | SPTA        | AFV2  | DC3       |
| SPT12 | 12 foot     | 600               | 140psi / 965 kPa | 3700 x 600 x 375       | SPTAL       | AFV2  | DC3       |



Float + Float Cover



75mm Drain Cap



## Sweep Ballast Troughs – Key Features

- Easy cleaning – smooth sweep out end
- Flexible and durable
- Hinged float cover prevents any damage to inlet
- Tough double skin unit for extra strength
- 50mm Drain Plug
- Contoured brooms available for easy sweep out cleaning

## Sweep Ballast Troughs – Product Range


| Code      | Description                  | Capacity (Litres) | Dimensions (L x W x H) | Float Cover | Float | Broom  | Drain Plug |
|-----------|------------------------------|-------------------|------------------------|-------------|-------|--------|------------|
| SWP250    | Trough with 25mm Float Valve | 250               | 3492 x 580 x 350       | SWP250FC    | AFV2  | STB250 | DP2        |
| SWP250-40 | Trough with 40mm Float Valve | 250               | 3492 x 580 x 350       | SWP250FC    | AFV2  | STB250 | DP2        |
| SWP450    | Trough with 25mm Float Valve | 450               | 3495 x 772 x 375       | SWP450FC    | AFV2  | STB450 | DP2        |
| SWP450-40 | Trough with 40mm Float Valve | 450               | 3495 x 772 x 375       | SWP450FC    | AFV2  | STB450 | DP2        |
| SWP450-50 | Trough with 50mm Float Valve | 450               | 3495 x 772 x 375       | SWP450FC    | AFV2  | STB450 | DP2        |



Float Cover  
SWP250



Float Cover  
SWP450



Drain Cap



# Equine



## Fence & Stable Drinkers with float

| Drinker Only | Drinker + Fence Brackets | Capacity (Litres) | Dimensions (L x W x H) | Brackets & Mounts | Float Valve | Drain Cap |
|--------------|--------------------------|-------------------|------------------------|-------------------|-------------|-----------|
| PT48W        | PT48WB                   | 8                 | 300 x 300 x 224        | PT14BR            | PTWK7       | DC2       |
| PT49W        | PT49WB                   | 25                | 440 x 380 x 350        | PT14BR            | AFV0L       | DC2       |
| PT50W        | PT50WB                   | 45                | 490 x 430 x 440        | PT49BRS           | AFV0L       | DC2       |
|              | PT90W                    | 90                | 550 x 1090 x 400       | PT90BRS           | AFV2        | DC2       |



PT90W



PT48W



PT49W



PT50W

## Fence & Stable Feeders

| Code  | Fence Brackets                      | Capacity (Litres) | Dimensions (L x W x H) | Brackets & Mounts |
|-------|-------------------------------------|-------------------|------------------------|-------------------|
| PT02  | Feeder + fence brackets             | 45                | 540 x 410 x 380        | PT49BRS           |
| PT03  | Hayrack (suitable to hang on fence) |                   | 600 x 500 x 700        | PT03R             |
| PT14  | Fence Feeder 'D' Type               | 32                | 440 x 400 x 250        | PT14BR            |
| PTF18 | Tyre Feeder                         | 18                | 350 DIA x 195H         |                   |



PTF18



PT03



PT14



PT02

## Feed Storage Bin & Handi Step

| Code   | Description                           | Dimensions (L x W x H) |
|--------|---------------------------------------|------------------------|
| FSB200 | Feed Storage Bin 200L-Hinged Lid      | 520 x 560 x 860        |
| HSP    | Mounting Block - Handi Step 120kg SWL | 700 x 520 x 670        |



FSB200



HSP

# Calving & Cattle




## Molasses Storage Tanks – Key Features

- Heavy duty wall thickness
- Ideal for liquids up to 1.4SG
- Standard with 80mm threaded outlet and inspection cover
- Fitted with overflow as breather and screen

## Molasses Storage Tanks – Product Range

| Code     | Profile    | Capacity (Litres) | Diameter | Overall Height | Inlet Height | Outlet Size |
|----------|------------|-------------------|----------|----------------|--------------|-------------|
| MOL13600 | Corrugated | 13,600            | 3100     | 2450           | 2100         | 80          |
| MOL22500 | Corrugated | 22,500            | 3560     | 2800           | 2470         | 80          |
| MOL31700 | Corrugated | 31,700            | 4100     | 3040           | 2610         | 80          |
| MOL50KL  | Smooth     | 50,000            | 4600     | 3440           | 3290         | 80          |

## Dimensions



Fit Out Clock



MOL31700

## Molasses Feeder – Key Features

- Urea feeding and bloat control
- Removable roller for cleaning
- Floating roller - no metal bearings

## Molasses Feeder – Product Range

| Code  | Description      | Dimensions (L x W x H) |
|-------|------------------|------------------------|
| PT05  | Licker Drum 100L | 800 X 700 X 425        |
| PT05C | Case only        |                        |
| PT05R | Roller only      |                        |



PT05



# Calving / Lambing Milk Feeders

## Key Features

- Generous spacing between teats
- Teat caps easily unscrew to wash out feeder
- Galvanised hanging brackets to suit rail spacing
- UV stabilised poly for long outdoor use

## Calf Milk Feeders

| Code | Description                | Capacity (Litres) | Dimensions (L x W x H) | Brackets & Mounts | Teat & Caps | Teats |
|------|----------------------------|-------------------|------------------------|-------------------|-------------|-------|
| MBP  | Single Teat Milk Bottle    | 2                 | 100 x 180 x 250        |                   | PCT/SCIT    | PCT   |
| MM1P | Single Teat Feeder         | 5                 | 200 x 200 x 300        |                   | PCT/SCIT    | PCT   |
| MM5P | 5 Teat Feeder - Divisional | 30                | 270 x 760 x 300        | MM5BR             | PCT/SCIT    | PCT   |
| MM8P | 8 Teat Feeder - Divisional | 40                | 340 x 1130 x 300       | MM12BR            | PCT/SCIT    | PCT   |




MBP



MM1P



MM5P

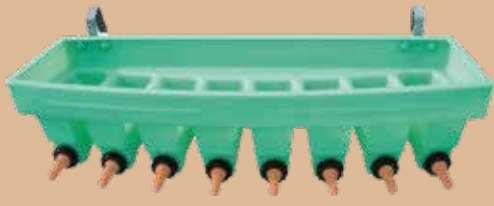

MM8P

## Lamb Milk Feeders

| Code | Description                | Capacity (Litres) | Dimensions (L x W x H) | Brackets & Mounts | Teat & Caps | Teats |
|------|----------------------------|-------------------|------------------------|-------------------|-------------|-------|
| MBL  | Single Teat Milk Bottle    | 2                 | 100 x 180 x 250        |                   | LT/SC       | LT    |
| MM1L | Single Teat Feeder         | 5                 | 200 x 200 x 300        |                   | LT/SC       | LT    |
| MM5L | 5 Teat Feeder - Divisional | 30                | 270 x 760 x 300        | MM5BR             | LT/SC       | LT    |
| MM8L | 8 Teat Feeder - Divisional | 40                | 340 x 1130 x 300       | MM12BR            | LT/SC       | LT    |



MM8L



MM5L



# Footrot Baths

## Standing – Key Features

- Control hoof diseases in sheep and goats
- Use with portable yard to keep animals confined
- Lightweight for ease of handling
- Non slip dimpled floor
- End to end linking feature
- Will not rot, rust or flake and fully chemical resistant

\*Not recommended for cattle and horses


## Race – Key Features

- Control hoof diseases in sheep and goats
- Unique pyramid shaped rib through centre of trough
- Keep hooves either side of the trough
- Added strength and support to trough floor
- Reduce amount of solution needed to treat stock
- Non slip dimpled floor
- End to end linking feature is ideal for placing in sheep race
- Will not rot, rust or flake and fully chemical resistant

\*Not recommended for cattle and horses

## Product Range

| Code | Description       | Dimensions<br>(L x W x H) | Capacity<br>(Max Litres) |
|------|-------------------|---------------------------|--------------------------|
| FRB  | FRB Standing Type | 2530 x 1000 x 200         | 300                      |
| RFRB | RFRB Race Type    | 2400 x 480 x 200          | 80                       |

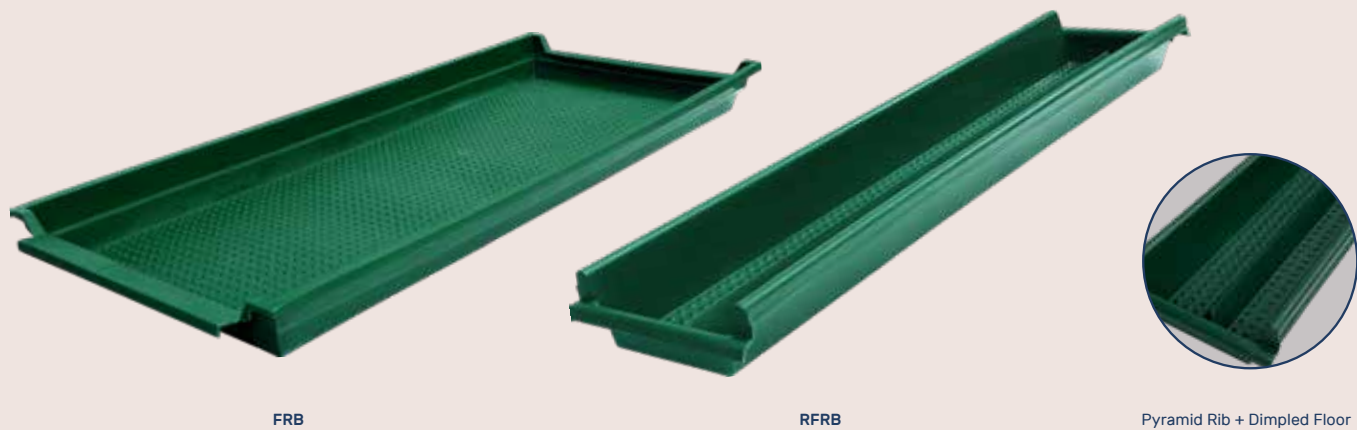

FRB

RFRB

Pyramid Rib + Dimpled Floor

# Farm Storage & Equipment



## Key Features

- Sturdy galvanised steel frame and rust proof poly tank
- Integrated forklift channels
- Rodent and weather proof
- Screw lid

## Silomaster / Cone Bottom Tanks

| Dry Outlet | Liquid Outlet | Capacity (Litres) | Dimensions      |
|------------|---------------|-------------------|-----------------|
| SM5000D    | SM5000L       | 5,000             | 2380DIA x 3030H |
| SM7500D    | SM7500L       | 7,500             | 2380DIA x 3620H |
| SM10000D   | SM10000L      | 10,000            | 2380DIA x 4210H |
| SM20000D   | SM20000L      | 20,000            | 3450DIA x 4376H |
| SM25000D   | SM25000L      | 25,000            | 3450DIA x 4923H |
| SM30000D   | SM30000L      | 30,000            | 3450DIA x 5471H |



SM30000L



SM10000L

## Heavy Duty - Suitable to hold liquids up to 1.5SG

| Dry Outlet   | Liquid Outlet | Capacity (Litres) | Dimensions      |
|--------------|---------------|-------------------|-----------------|
| SM5000D-1.5  | SM5000L-1.5   | 5,000             | 2380DIA x 3530H |
| SM7500D-1.5  | SM7500L-1.5   | 7,500             | 2380DIA x 4115H |
| SM10000D-1.5 | SM10000L-1.5  | 10,000            | 2380DIA x 4705H |
| SM20000D-1.5 | SM20000L-15   | 20,000            | 3450DIA x 4376H |
| SM25000D-1.5 | SM25000L-1.5  | 25,000            | 3450DIA x 4923H |
| SM30000D-1.5 | SM30000L-1.5  | 30,000            | 3450DIA x 5471H |



Liquid Outlet



Tank Frame Connection Pins

## Dry Feed Frame – Product Range

| Code      | Capacity (Litres) | Dimensions      |
|-----------|-------------------|-----------------|
| SMDF5000  | 5,000             | 2380DIA x 3525H |
| SMDF7500  | 7,500             | 2380DIA x 4115H |
| SMDF10000 | 10,000            | 2380DIA x 4705H |

## Colour Range



SMDF7500

### Dog Houses – Key Features

- Cooler in summer, warmer in winter
- Hygienic – easily washed out
- Rear venting to create airflow

### Dog Houses – Product Range

| Code | Description         | Dimensions<br>(L x W x H) | Opening Size |
|------|---------------------|---------------------------|--------------|
| TDD3 | Log Cabin Dog House | 1060 x 860 x 780          | 280 x 400    |



TDD3

### Tool Boxes – Key Features

- Flush mounted zinc hardware
- Removable internal tray included
- Raised weather resistant lid seal

### Tool Boxes – Product Range

| Code  | Description            | Capacity<br>(Litres) | Dimensions<br>(L x W x H) |
|-------|------------------------|----------------------|---------------------------|
| BUC14 | B'Ute Tool Box - Small | 140                  | 970 x 400 x 360           |
| BUC26 | B'Ute Tool Box - Large | 266                  | 1170 x 570 x 400          |
| TBC20 | Tradesman Box          | 200                  | 980 x 390 x 600           |



TBC20



BUC26

### Grain Hopper

| Code | Description                                      | Dimensions<br>(L x W x H) |
|------|--------------------------------------------------|---------------------------|
| GAB2 | Grain Hopper (Auguer Boot) Fits 4-10 inch-Auguer | 1060 x 860 x 780          |



GAB2

# Farm Storage & Equipment



## Bulka Bins– Key Features

- All galvanised forklift frame - lifts on/off easily
- Stainless steel chute which is rodent and weather resistant
- Extended leg models allow for bag filling
- Suitable for grains, pellets and more
- Stackable - Space Saving

## Bulka Bins – Product Range

| Code   | Description                      | Capacity (M³) | Dimensions (L x W x H) | Lid   |
|--------|----------------------------------|---------------|------------------------|-------|
| BB12   | Galvanised frame                 | 1.2           | 1200 x 1500 x 1600     | BBLID |
| BB12XL | Galvanised frame - extended legs | 1.2           | 1200 x 1500 x 2300     | BBLID |
| BB16   | Galvanised frame                 | 1.6           | 1200 x 1500 x 1860     | BBLID |
| BB16XL | Galvanised frame - extended legs | 1.6           | 1200 x 1500 x 2560     | BBLID |

| Product            | BB12  | BB16   |
|--------------------|-------|--------|
| Wheat & Meatmeal   | 960kg | 1200kg |
| Barley             | 750kg | 1000kg |
| Oats               | 600kg | 800kg  |
| Urea               | 876kg | 1200kg |
| Lucerne            | 300kg | 400kg  |
| Calf & Pig Pellets | 800kg | 1050kg |



Lid



Handle



Flap



BB12



BB16

# Produce Bins & Liners



## Produce Bin – Key Features

- Stackable when full, nest them empty
- Optimum height for hand picking
- FEA analysis testing completed for strength
- Ideal pallet size for transporting
- Forklift access channels
- Food grade polyethylene


## Product Bin & Liners – Product Range

| Code     | Description                  | Capacity (Litres) | Dimensions (L x W x H) | Lid     |
|----------|------------------------------|-------------------|------------------------|---------|
| PPB100   | Produce Bin                  | 1,000             | 1190 x 1190 x 1010     | PPBL    |
| PPB100FC | Produce Bin incl fork plates | 1,000             | 1190 x 1190 x 1010     | PPBL    |
| PBL85    | Liner Only                   | 850               | 1110 x 1110 x 760      | PBLD    |
| PBL100   | Liner Only                   | 1,000             | 1110 x 1110 x 885      | PBLD    |
| PBL145   | Liner Only                   | 1,450             | 1110 x 1110 x 1200     | PBLD    |
| GBL      | Grape Bin Liner              | 2,850             | 2170 x 1200 x 1100     | GBLLIDN |


\*Steel frames not included, only shown for illustrative purposes



PPB100

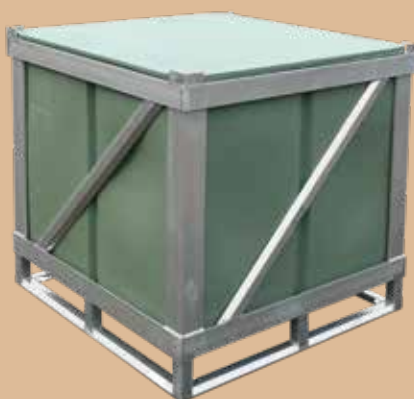

PBL100

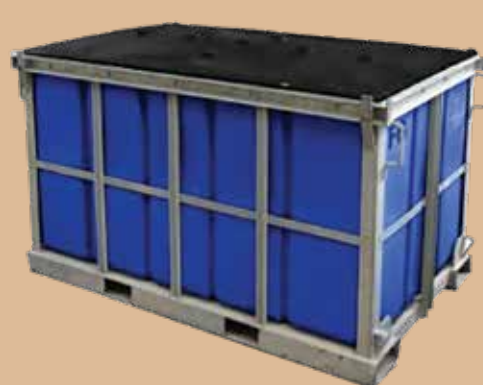

GBL

# Delivery & Installation

It is the owner's responsibility to provide clear access to site, and to secure tank/s left at site.

If the driver cannot reach the desired location, the tank/s will be left in the closest and safest location deemed possible by our driver. If the tank/s can not be left at site, the owner will incur a redelivery charge.

All products can be delivered throughout Australia. Call us for a quote for deliveries outside nominated zones.

## Delivery Requirements

Clearance required for truck and trailer is 19m long, 5m high, 3.5m wide. To put this into perspective, our trucks are longer than a semi-trailer.

It is the Owners responsibility to position the tank on the pad and to connect the tank.

Large and/or bulky products will require a lifting device (forklift etc) to unload from the truck. This is not supplied by the driver.

### Re-Scheduling Fee

Please be advised that if the Owner chooses to change the delivery date a re-scheduling fee may be incurred.

For more information visit <https://www.polymaster.com.au/news/requirements-for-tank-deliveries/>

## Polymaster Tank Installation Guide

### 1. No Entry Required

Installation of a Polymaster tank does not require entry into the tank.

### 2. Tank Site Preparation

The site must be firm, level, and flat. A concrete pad or a well-compacted sand base (75mm–100mm deep) is recommended. Other suitable bases include crushed dust or consolidated fill, free of rocks, stones, or sharp objects. The base should extend 600mm beyond the tank's diameter. A retaining wall should support the base's perimeter to prevent erosion.


### 3. Overflow & Drainage

The overflow must be piped away from the tank to avoid undermining the base.

### 4. Plumbing & Pipework

A flexible hose (minimum 300mm/12") must be installed after the tank valve to absorb shocks and movement.

*If the tank is placed on a stand, do not support any pipework directly from the tank. Note: Failure to properly install tank as per instructions will void warranty. Never enter a tank alone. Have an attendant stand by. Restricted Space - only enter after carrying out a Hazard Identification Risk Assessment (H.I.R.A.).*

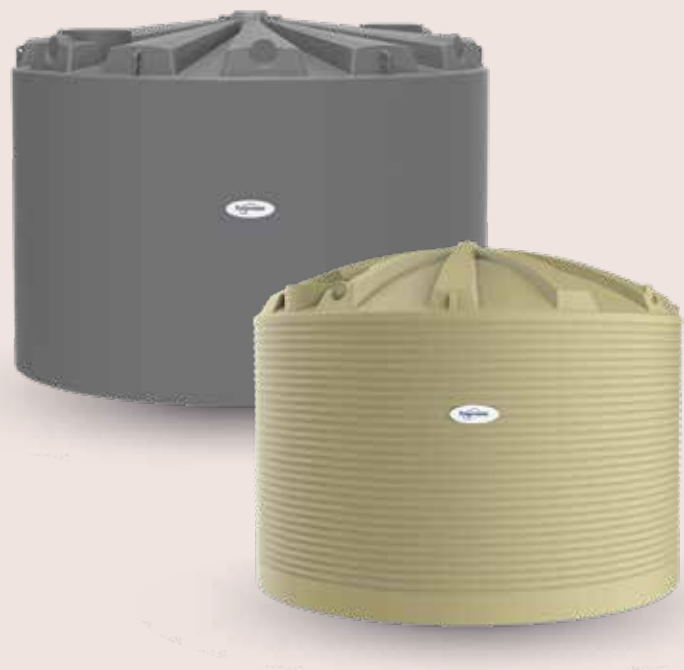

## Free Delivery (Within Zone 1)

Polymaster offers free delivery to site throughout most of Victoria, South Australia and parts of New South Wales & Queensland for tanks exceeding 13,000Ls (within zone 1). Please refer to our free delivery zone map on [polymaster.com.au/delivery-installation](https://polymaster.com.au/delivery-installation).

All tanks less than 13,000L are delivered free to store (within zone 1).  
A delivery fee will be incurred to deliver these tanks to site.





Precision  
Engineered perfection.

Polymaster





1800 062 064  
[polymaster.com.au](http://polymaster.com.au)

Search **Polymaster** online.



SCAN TO VIEW  
ONLINE