



## HHR-370S

### FEATURES

- Automatic pressure controller (Start & Stop on demand)
- Run dry protection
- Quick & Easy to install
- Efficient on power consumption

### CONSTRUCTION


- Pump casing: Stainless steel AISI 304
- Motor shaft: Stainless steel AISI 304
- Impellers: Technopolymer
- Diffuser: Technopolymer
- Double mechanical seal: silicon carbide – graphite / ceramic – graphite
- Motor IP68
- Cooled motor (by water) of Class F and thermal protection
- Electric power cable HO7RN 5m with 3 pin

## SUBMERSIBLE OPTION




RAIN / MAINS SYSTEMS

### Installation Guide

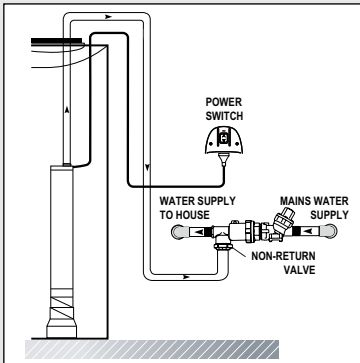

### PERFORMANCE CURVE

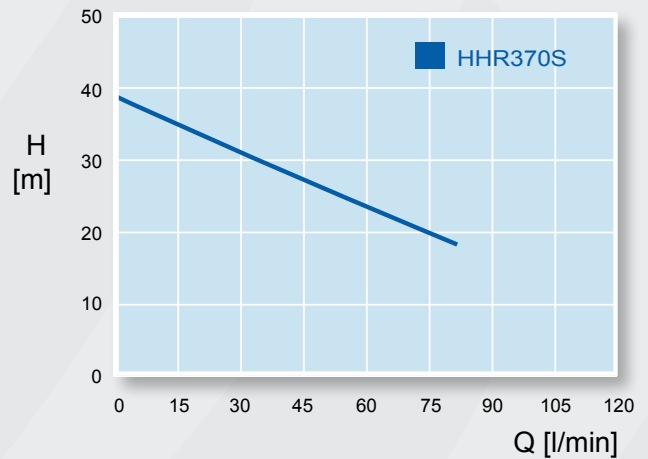

### TECHNICAL DATA

Model	POWER		MAX. FLOW (L/min)	MAX. HEAD (m)	Outlets	STOREY Suitable for:	CONNECTION	
	(kW)	(HP)					Outlet (mm)	Mains Inlet
HHR-370S	0.37	0.50	82	36	4	Single & Double	3/4" (M)	3/4" (M)

## ENCLOSURE OPTION

HHR-400 and HHR-550 also available with a polypropylene cover and base, in a range of colours, and two stainless steel flexible braided hoses for easy connection.



- DUNE
- WOODLAND GREY
- PAPERBARK
- EVENING HAZE

OTHER COLOURS ARE AVAILABLE UPON REQUEST